ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Integrated Power Designs SRW-115-4004* at our website: *Click HERE*

115 WATTS

SRW-115 SERIES AC-DC

FEATURES:

- **RoHS Compliant**
- **Universal 85-264 VAC Input**
- **Compact 4.25" x 7" x 1.25" Size**
- **2 Year Warranty**
- **Fits 1U Applications**
- **One to Four Outputs**
- **EN 60950-1 ITE Certification**
- **Class B Emissions per EN 55022**
- **Optional Chassis and Cover**



OPEN CHASSIS



CHASSIS/COVER

SAFETY SPECIFICATIONS

General		Protection Class: I Overvoltage Category: II Pollution Degree: 2
c UL us	Underwriters Laboratories File E137708/E140259	UL 60950-1 2nd Edition, 2007
IECEE CB SCHEME		CB Certificate per IEC 60950-1:2005 2nd Edition +A1:2009 including all National Deviations
c UL us	UL Recognition Mark for Canada File E137708/E140259	CAN/CSA-C22.2 No. 60950-1-07, 2nd Edition
TUV SUD	TUV	EN 60950-1/A12:2011
CE	Low Voltage Directive RoHS Directive (Recast)	(2006/95/EC of December 2006) (2011/65/EU of June 2011)

MODEL LISTING

MODEL NO.	OUTPUT 1	OUTPUT 2	OUTPUT 3	OUTPUT 4
SRW-115-4001	+5V/12A	-5V/4A	+12V/4A	-12V/2A
SRW-115-4002	+5V/12A	+24V/1A	+12V/4A	-12V/2A
SRW-115-4003	+5V/12A	-5V/4A	+15V/3A	-15V/2A
SRW-115-4004	+5V/12A	+24V/1A	+15V/3A	-15V/2A
SRW-115-4005	+5V/12A	+12V/1A	+24V/3A	-12V/1A
SRW-115-4006	+5V/12A	+12V/3A	+15V/2A	-15V/2A
SRW-115-4007	+5V/12A	+12V/2.5A	+24V/2A	-5V/1A
SRW-115-4008	+24V/2A	+5V/3A	+5V/2A	-24V/2A
SRW-115-4011	+5V/5A	+15V/1A	+24V/5A	-15V/1A
SRW-115-4012	+5V/5A	+12V/1A	+24V/3A	-12V/1A
SRW-115-4013	+5V/13A	+5V/5A	+12V/3A	-5V/3A
SRW-115-4014	+3.3V/12A	+5V/4A	+15V/3A	-15V/2A
SRW-115-4015	+3.3V/12A	+5V/4A	+12V/4A	-12V/2A
SRW-115-4016	+5.2V/12A	-2V/9A	12V/4A	-12V/2A
SRW-115-4017	5V/8A	19V/1A	19V/2A	54.5V/.50A
SRW-115-4019	+15V/3A	-15V/2A	+24V/2A	3.3V/1A
SRW-115-4020	+15V/3A	-15V/2A	+36V/1.5A	3.3V/1A
SRW-115-4102	+5V/12A	+12V/2A	+12V/4A	-12V/2A
SRW-115-3001	+5V/12A		+12V/4A	-12V/32
SRW-115-3002	+5V/12A		+15V/4A	-15V/2A
SRW-115-3003	+5V/12A		+24V/3A	-12V/1A
SRW-115-3004	+5V/12A	+24V/1A	+12V/6A	
SRW-115-3005	+15V/3A	-15V/2A	+24V/2A	
SRW-115-3006	+15V/3A	-15V/2A	+36V/1.5A	
SRW-115-3007	+5V/14A	-5V/4A	+12V/4A	
SRW-115-2001	+5V/12A		+24V/3A	
SRW-115-2002	+12V/5A			-12V/5A
SRW-115-2003	+15V/5A			-15V/5A
SRW-115-2004	+24V/2.5A			-24V/2.5A
SRW-115-2005	+5V/12A		+15V/5A	
SRW-115-2006	+5V/12A		+12V/5A	
SRW-115-2007	+17V/3.4A			-17V/3.4A
SRW-115-2008	+9.25V/6A			-9.25V/6A
SRW-115-2010	+7.5V/10A			-7.5V/6A
SRW-115-2011	+28V/2A			-28V/2A
SRW-115-2012	+12V/8A			12V/2A

OUTPUT SPECIFICATIONS

Total Output Power at 50°C	115W		
Output Voltage Centering	Output 1:	± 1.0%	(All outputs at 50% load)
	Output 2:	± 5.0%	
	Output 3:	± 5.0%	
	Output 4:	± 5.0%	
Output Voltage Adjust Range	Output 1:	95 - 105%	
Load Regulation	Output 1:	1.0%	(10-100% load change)
	Output 2:	5.0%	(10-100% load change)
	Output 3:	5.0%	(10-100% load change)
	Output 4:	5.0%	(10-100% load change)
Source Regulation	Outputs 1 – 4:	0.5%	
Cross Regulation	Output 2:	5.0%	(Output 1 load
	Output 3:	5.0%	varied 50-100%
	Output 4:	5.0%	
Output Noise	Outputs 1 - 4:	1.0%	
Turn on Overshoot	None		
Transient Response	Outputs 1 – 4		
Voltage Deviation	5.0%		
Recovery Time	2mS		
Load Change	50% to 100%		
Output Overvoltage Protection (optional)	Output 1:	110% to 150%	
Output Overpower Protection	Outputs 1-4:	110% Min.	
	Outputs cycle on/off, auto recovery		
Hold Up Time	16 mS min., 115W output, 120V Input		
Start Up Time	1 Second		

INPUT SPECIFICATIONS

Source Voltage	85 – 264 Volts AC
Frequency Range	47 – 63 Hz
Source Current	
True RMS	3.5A at 85V Input
Peak Inrush	40A
Efficiency	.72-.80 , (varies by model)

ENVIRONMENTAL SPECIFICATIONS

Ambient Operating Temperature Range	0° C to + 50° C Derating: See Power Rating Chart
Storage Temp. Range	- 40° C to + 85° C
Temperature Coefficient	Outputs 1 – 4: 0.02%/°C
Conducted Emissions	EN 55022 Class B

GENERAL SPECIFICATIONS

Dielectric Strength(7)	
Reinforced Insulation	4242 VDC, Primary to Secondary, 1 Sec.
Basic Insulation	2121 VDC, Primary to Ground, 1 Sec.
Operational Insulation	500 VDC, Secondary to Ground, 1 Sec.
Power Fail Signal (Optional)	Logic low with input power failure 2 mS minimum prior to Output 1 dropping 1%
Mean-Time Between Failures	150,000 Hours min., MIL-HDBK-217F, 25° C, GB
Weight	1.30 Lbs. Open Frame 2.25 Lbs. Chassis and Cover


NOTES


Consult factory for alternate output configurations.
Consult factory for positive, negative or floating outputs.
Refer to Applications Information for complete output power ratings.
All specifications are maximum at 25° C, 115W unless otherwise stated, may vary by model and are subject to change without notice.
Specify optional chassis and cover, power fail, overvoltage protection, soft start or DC Input when ordering.
TUV only: SRW-115-4016

INTEGRATED POWER DESIGNS 300 Stewart Road ■ Wilkes-Barre, PA 18706 ■ Phone: (570) 824-4666 ■ Fax: (570) 824-4843 ■ Email: sales@ipdpower.com ■ Web: www.ipdpower.com


SRW-115 SERIES MECHANICAL SPECIFICATIONS


OPEN FRAME

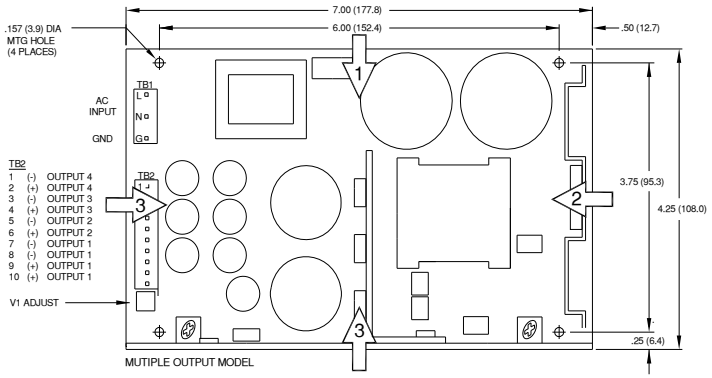

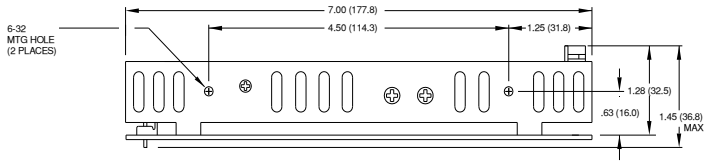

OPTIONAL CHASSIS/COVER

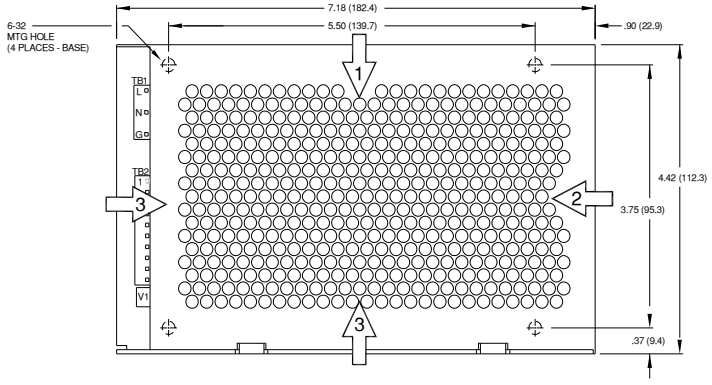

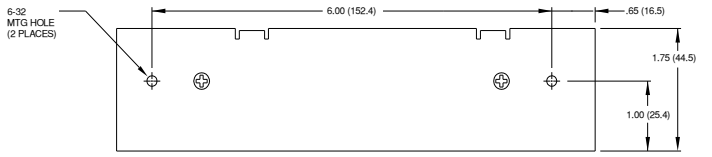


ALL DIMENSIONS IN INCHES (MM)

APPLICATIONS INFORMATION

1. Each output can deliver its rated load but total output power must not exceed 115 watts.
2. Semiconductor case temperatures must not exceed 110°C.
3. Sufficient area must be provided around convection cooled power supplies to allow natural movement of air to develop.
4. This product is intended for use as a professionally installed component within information technology.
5. A minimum load of 20% is required on output one to insure proper regulation of remaining outputs.
6. Peak to peak output ripple and noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip, 20 MHz bandwidth.
7. This product was type tested and safety certified using the dielectric strength test voltages listed in Table 5B of UL 60950-1. In consideration of Clause 5.2.2, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress basic insulation. Secondary to ground capacitors may need to be removed prior to performing a dielectric strength type test on the end product. It is highly recommended that the DC equivalent test voltages be used when performing a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
8. This power supply has been safety approved and final tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
9. Maximum screw penetration into mounting holes is .250 inches.

MAXIMUM OUTPUT POWER VS. AMBIENT TEMPERATURE

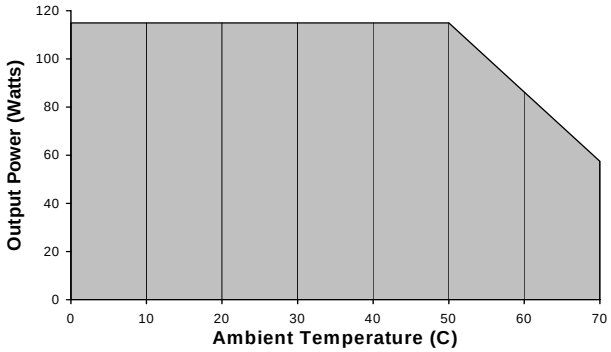

CONNECTOR SPECIFICATIONS

TB1/G	AC Input	.156 friction lock header mates with Molex 09-50-3051 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.
TB2	DC Output	.156 friction lock header mates with Molex 09-50-3101 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.
PF		power fail signal.
TB2-7,8		power fail signal return.

RECOMMENDED AIR FLOW DIRECTION

1 – Optimum 2 – Good 3 – Fair

REV.B 07/08/2013

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP