

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keithley CTM-05A* at our website: ***Click HERE***

CTM-05/A
CTM-10

5/10-Channel 7MHz Counter/Timer Boards

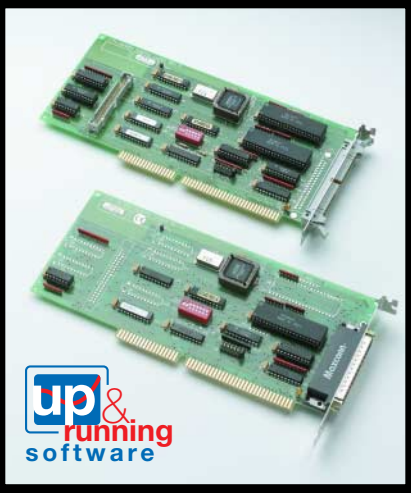

- 5/10 independent 16-bit counters
- Uses industry standard 9513 chip
- CTM-05 compatible
- Counts frequency to 7MHz
- Up/down and binary/BCD counting
- Internal 1MHz/5MHz frequency source
- Programmed frequency output
- Complex pulse generation
- One-shot or continuous outputs
- Retriggering capability
- Programmable count/gate source selection
- Programmable input/output polarities
- AT and XT interrupts
- Programmable gating functions
- 8-bit or 16-bit latched input port
- 8-bit or 16-bit latched output port
- Interrupt input channel
- 32-bit DriverLINX drivers plus bundled start-up software. Compatible with TestPoint.

Functional Description

Keithley's CTM-05/A and CTM-10 are 5 and 10 channel, respectively, counter/timer boards that plug into ISA-bus compatible PCs. You can use these boards in a broad range of applications, including position, time, frequency, and period measurements, output pulse train generation, event counting and gating, and frequency generation. The CTM-05/A and CTM-10 will operate in the fastest PC's including EISA and Pentium-based systems.

The CTM boards use the powerful 9513 counter/timer chip for event counting, pulse measurement, frequency measurement, and pulse generation. The CTM-05/A uses one 9513 which contains 5 general-purpose 16-bit counters. The CTM-10 contains two 9513's. An 8-bit digital input port and an 8-bit digital output port (16 bits on CTM-10) are also available as is an external interrupt (see block diagram).

Counter inputs are software-selectable as active-high or active-low. Each counter may be gated in hardware or by software. The counters can be programmed to count up or count down in either binary or BCD. All five counters can be connected together by software to form a 32-, 48-, 64-, or 80-bit counter.

Each counter has a Load Register and a Hold Register. The Load Register is used to automatically reload the counter to a programmed value, thus controlling the count and count period. The Hold Register is used to save count values without disturbing the counting process. This permits the PC to read intermediate counts. The Hold Register may also be used as a second Load Register to generate complex waveforms.

Each counter has a single dedicated output pin. It may be configured to be turned off when the output is not of interest. Considerable versatility is available for configuring both the input and the gating of individual counters. This permits dynamic reassignment of inputs under software control, allows multiple counters to use a single input, and allows a single gate pin to control more than one counter.

Advanced Interrupt Capability

The interrupt source is software-selectable and can be set to any one of the five counter outputs or to an external interrupt input. The CTM-10 contains independent interrupt logic for both of its 5 channel halves. An interrupt is latched upon receipt of a rising edge (0 to 1 transition). The CTM-05/A and CTM-10 can be set via software to generate an interrupt on levels 3, 5, 7, 10, 11, or 15 of the host computer. For compatibility with existing applications, the CTM-05/A and the lower half of the CTM-10 also provides jumper-selectable interrupt levels of 2 through 7. Whenever any of the software-selectable interrupt levels are chosen, the jumper-selected interrupt feature is disabled.

9513 Counter/Timer Chip

The 9513 is an extremely powerful counter/timer chip. It supports 24 different modes of operation (A through X), some of which are listed below.

- Software (SW) triggered strobe without hardware gating
- Hardware (HW) triggered strobe
- Rate generator with or without HW gating
- Non-retriggerable or retriggerable one-shot
- SW-triggered delayed pulse one-shot with HW gate
- Variable duty cycle rate generator with or without gate
- Hardware-triggered delayed pulse one-shot
- SW-triggered strobe with edge gating and retriggering
- Rate generator with synchronization

ACCESSORIES AVAILABLE (CTM-10)

CAB-4037	CTM-10 Aux. Connector to D37 Male Connector
CACC-2000	CTM-10 to STA-50 Cable
STA-50	Screw Terminal Accessory Board
STP-50	Screw Terminal Panel for 50-pin cables

ACCESSORIES AVAILABLE (CTM-05/A and CTM-10)

C1800	CTM-05/A or CA4037 to STA-U or STP-37 Cable
MS-CTM-05/A	Upgrade to latest version of DriverLINX software and hardware manuals for CTM-05/A and -10
STA-U	Universal Screw Terminal Accessory
STC-37	Direct Screw Terminal Connector
STP-37	Screw Terminal Panel for 37-pin cables
TESTPOINT	TestPoint Software Package

Event counting, pulse measurement, frequency measurement, and more

PCI/ISA/PCMCIA

1.888.KEITHLEY (U.S. only)
www.keithley.com

KEITHLEY
A GREATER MEASURE OF CONFIDENCE

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Output pulse train generation, gating, frequency generation, and more

PCI/ISA/PCMCIA

CTM-05/A CTM-10

5/10-Channel 7MHz Counter/Timer Boards


Ordering Information

CTM-05/A	5-Channel Counter/ Timer Board
CTM-10	10-Channel Counter/ Timer Board

APPLICATIONS

- Event counting
- Frequency measurement
- Frequency synthesis
- Complex pulse generation
- Interval measurement

Configuration Guide

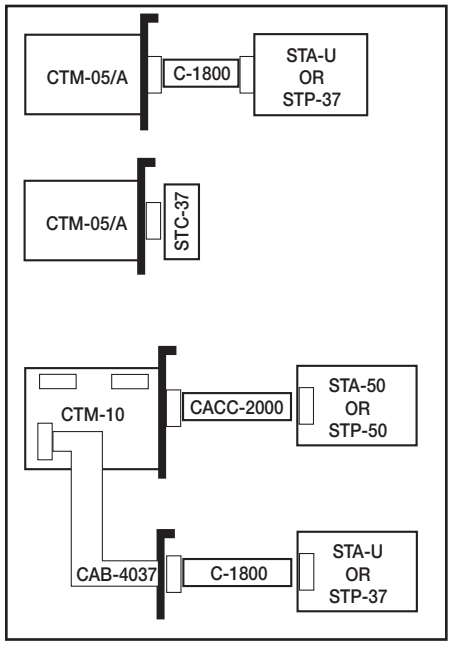


Connector Pin Assignments


All counter and digital I/O for the CTM-05/A is accessed through a standard 37-pin D-type male connector that projects through the rear panel of the computer. For soldered connections, a standard 37-pin D-female (ITT/Canon DC37S or equivalent) is the correct mating part and can be ordered from Keithley as part number SFC-37. To simplify field wiring, use the STA-U Screw Terminal Board or STP-37 Screw Terminal Panel and the C1800 cable. Direct screw terminal connection is possible with the STC-37.

For the CTM-10, both Unit A and Unit B counters are provided on a standard 50-pin header. The digital I/O and the remaining (seldom used) control signals are provided on a standard 40-pin header. The CA4037 cable option can be used to bring these signals to a 37-pin D-male connector (requires second slot in PC).

CTM-05/A Connector Pin Assignment

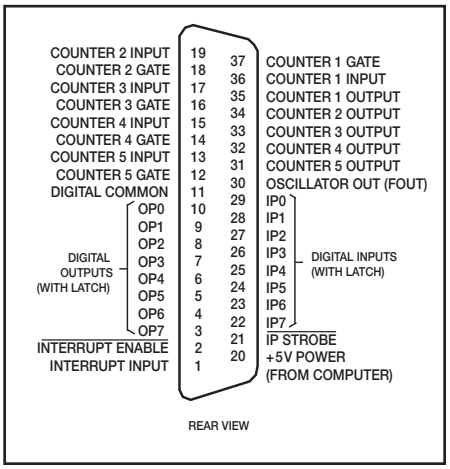

CTM-10 Connector Pin Assignment

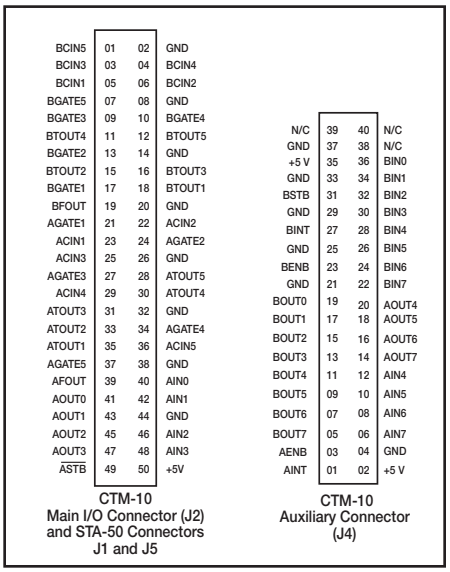

Specifications

COUNTER/TIMER

TYPE OF COUNTER: 9513 (2 in CTM-10).
NUMBER OF COUNTERS: 5 (10 in CTM-10).
COUNTING MODES: Up or down, binary or BCD.
MAXIMUM INPUT RATE: 7MHz.
MINIMUM PULSE WIDTH: High: 70ns. **Low:** 70ns.
ONBOARD TIME BASE: 1MHz or 5MHz, ±0.01% (0–70°C).
INPUT LOW VOLTAGE: 0.8V max.
INPUT LOW CURRENT: 1mA max.
INPUT HIGH VOLTAGE: 2.2V min.
INPUT HIGH CURRENT: –10μA max.
OUTPUT LOW VOLTAGE: 0.4V max at 3.2mA.
OUTPUT HIGH VOLTAGE: 2.4V min at –200μA.

INTERRUPT INPUTS

	CTM-05/A	CTM-10
External Interrupts/Enable:	1/1	2/2
Interrupt Levels: (Jumper-Selectable):	2 to 7	same (lower 5 ch only)
(Software Selectable):	3, 5, 7, 11, or 15	same
Source Selection:	external signal or output 1, 2, 3, 4, or 5	same

DIGITAL INPUTS

DIGITAL INPUTS (& INTERRUPTS):	LSTT	same
Input Bits:	8	16
Low Voltage:	0.8V max	same
Low Current:	–0.4mA max	same
High Voltage:	2.0V min	same
High Current:	20μA max	same

DIGITAL OUTPUTS

Digital Outputs:	LSTTL	same
Output Bits:	8	16
Low Voltage:	0.5V max at I_{sink} = 8.0mA	
High Voltage:	2.4V min at I_{source} = –0.4mA	

ENVIRONMENTAL

OPERATING TEMP: 0 to +50°C.
STORAGE TEMP: –20 to +70°C.
HUMIDITY: 0 to 95% non-condensing.
EMC: Conforms to European Union Directive 89/336/EEC (CTM-05/A only).
SAFETY: Meets EN61010-1/IEC 1010 (CTM-05/A only).
DIMENSIONS: 9in × 4.5in × 0.75in (¾ slot); (22.9cm × 11.4cm × 1.9cm).
WEIGHT: 3.7oz (105g).

1.888.KEITHLEY (U.S. only)
www.keithley.com

KEITHLEY

A GREATER MEASURE OF CONFIDENCE

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP