ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Keithley / MetraByte SRA-01* at our website: ***Click HERE***

Screw Terminal Accessory Boards

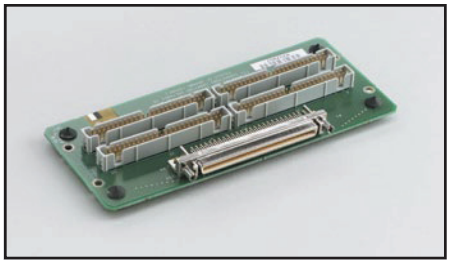


CONN-3160-D1: Screw Terminal Panel. The CONN-3160-D1 Adapter Panel brings all KPCI-3160 digital I/O signals out to an external panel via 50-pin headers. This panel allows connection of the ADP-5037 to allow the KPCI-3160 to operate the SRA-01 or ERA-01, ERB-24 or SSIO-24 relay products or to allow digital connections via the STP-50 or STA-50 Screw Terminal Panel and accessory boards. Requires the CAB-1800 or CAB-1800/S cable.

Dimensions: 5.2″L × 6.7″W × 2.3″H

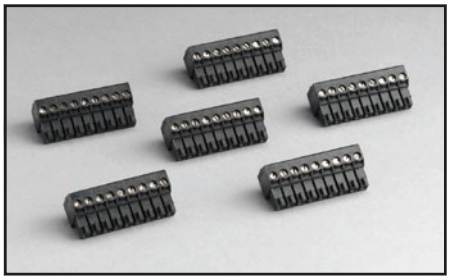

KUSB-ST: Extra screw terminal blocks. For use with KUSB-3102, -3108.

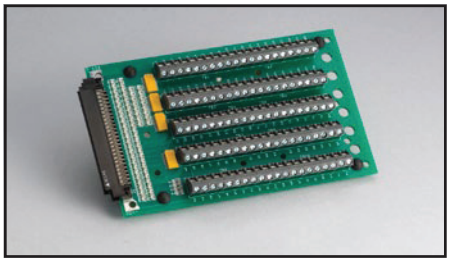


KUSB-STP100: Screw terminal panel with 100-pin, male, D-type connector. This screw terminal panel will only work with the KUSB-CABDIO. For use with KUSB-3160.




STA-50: The STA-50 is a universal 50-pin screw terminal board. Two 50-pin male connectors and a user breadboard area are provided. The signals on the two connectors are tied together and brought out to screw terminals. Requires a CACC-2000 cable.

Dimensions: 13.2cm × 17.0cm × 5.8cm

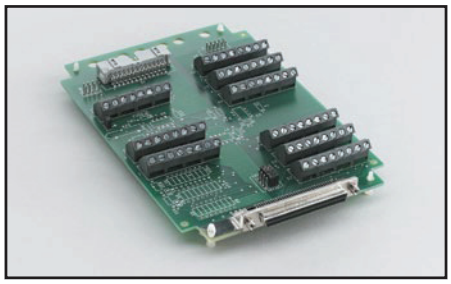


STA-300: Screw Terminal Accessory. Mounts on a panel and includes nylon standoffs for tabletop applications. Requires a CAB-305 cable.

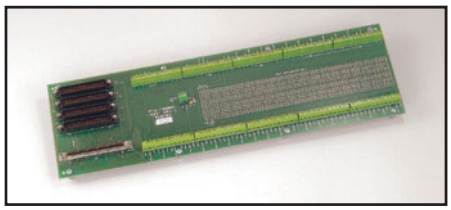


STA-1800HC: The STA-1800HC is a dedicated screw terminal accessory for the DAS-1800HC. All I/O connections on the DAS-1800HC are brought out to labeled screw terminals. For ease of wiring differential inputs, each channel has an adjacent ground connection. A CJC sensor with terminal blocks is included to facilitate the measurement of thermocouples with the DAS-1801HC. Four 37-pin D-type male connectors are available for connecting external accessories. Up to 2 MB01 backplanes can be accommodated. A breadboard area with power connections is available for custom circuitry.


Dimensions: 16.0″ × 4.75″ (40.6cm × 12.1cm)

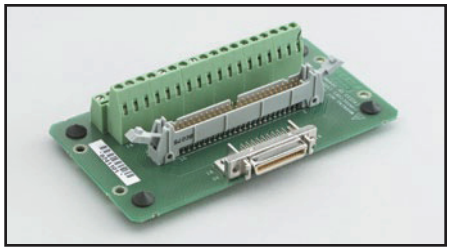

STA-3108-D1: Adapter panel that adapts the 36-pin connector (from the KPCI-3130 or KPCI-3132 digital I/O port) of the CAB-1284CC cable to a 50-pin header (mounted on the STA-3108-D1) with signals arranged for use with KPCI-PIO96 accessories.

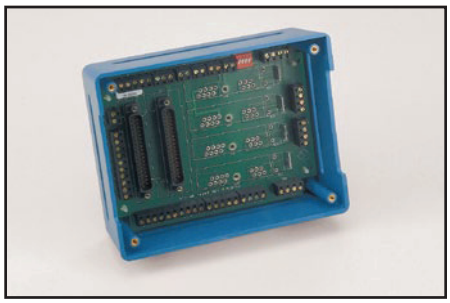

STA-MB: The STA-MB Screw Terminal Accessory provides sockets for 4 MB-Series modules. Two parallel 37-pin D male connectors provide interfaces for DAS boards and accessories. The MB-Series module inputs and outputs as well as the I/O connector pins are brought out to screw terminals. You then wire the MB-Series outputs to pins on the I/O connectors according to the requirements of your application.

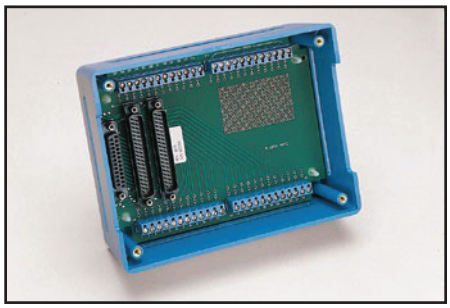


STA-U: The STA-U is a universal screw terminal accessory designed to connect to many Keithley data acquisition boards. It includes one 25-pin female D-type connector and two 37-pin male D-type connectors tied together. All 37 lines are brought out to screw terminal connections. A small breadboard area is available for additional circuitry. The STA-U is used for direct connec-

Screw Terminal Accessory Boards


tion to data acquisition boards or it can be used in conjunction with an expansion accessory such as the EXP-GP to provide connection to the signals not available on the expansion accessory.

Dimensions: 5.2″L × 6.7″W × 2.3″H

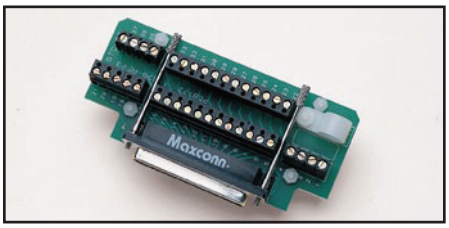


STC-37: Direct Screw Terminal Connector (37 pin). The STC-37 plugs directly onto the I/O connector at the back of the PC. All lines are brought out to screw terminals.

Dimensions: 2.5″L × 4.75″H × 0.75″W (6.4cm × 12.1cm × 1.9cm)

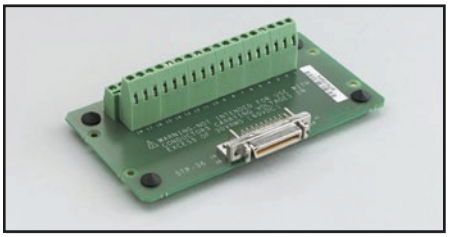

STP-36: Screw Terminal Panel. The STP-36 brings all KPCI-3130/3132, KPCI-PDISO8A, or KPCI-PIO32IOA signals out to external screw terminals. The standard versions come with rubber standoffs, making the STP-37 ideal for placing on a desktop or mounting in custom panels. Requires a CAB-1284CC-.5 half-meter cable or CAB-1284CC-2 two-meter cable.

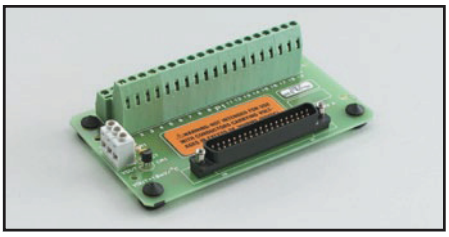


STP-37: Screw Terminal Panel with 37-pin male D-type connector and CJC sensor. The STP-37 is a cost-effective means of providing general-purpose screw terminal connections and CJC sensor. Requires a C1800 or S1800 cable.

Dimensions: 4.8″ × 2.9″ × 1.25″ (12.2cm × 7.4cm × 3.2cm)

STP-37/FC: Screw Terminal Panel with female D37 connector. The STP-37/FC brings the signals out to external screw terminals on an encased panel. The female D37 connector prevents user voltages from being exposed when the cable is unplugged. Requires a C-3200 or C1800/M cable. DIN rail compatible.

Dimensions: 4.9″ × 3.1″ × 1.25″ (12.4cm × 7.9cm × 3.2cm)

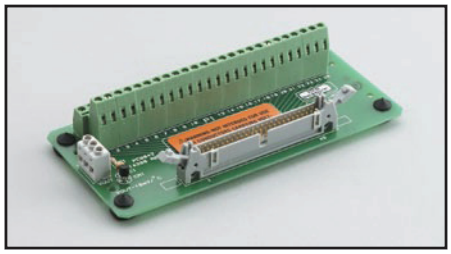


STP-50: Screw Terminal Panel with 50-pin male header. The STP-50 brings signals out to screw terminals. Requires a CDAS-2000 or CACC-2000 cable.

Dimensions. 6.1″ × 2.9″ × 1.25″ (15.5cm × 7.4cm × 3.2cm)


STP-50/C: Screw Terminal Panel with case and 50-pin male header. DIN rail compatible.

Dimensions: 6.2″ × 3.1″ × 1.5″ (15.7cm × 7.9cm × 3.8cm)

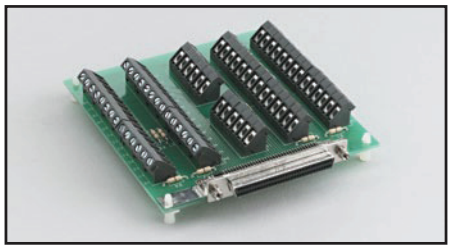

STP-68: Screw Terminal Panel. The STP-68 brings all signals out to external screw terminals. Requires a CAB-305 cable. Not CE approved.


Distributed by:
www.SignalTestInc.com
1529 Santiago Ridge Way
San Diego, CA 92154 USA.
Sales@SignalTestInc.com
SIGNAL TEST™
New & Used Test Equipment

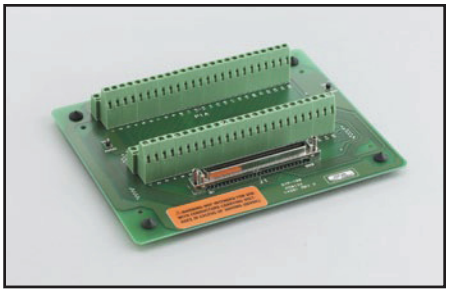


STP-100: Screw Terminal Panel with 100-pin male D-type connector. The STP-100 brings signals out to numbered screw terminals. Requires a CAB-1800 cable. Compatible with DAS-1800HC and KPCI-1800HC boards.

Dimensions: 5.5″ × 7.0″ × 1.5″ (12.4cm × 7.9cm × 3.2cm)

STP-100U: Accessory for KPCI-3160. Provides direct digital connections from the KPCI-3160 to access all digital I/O signals.

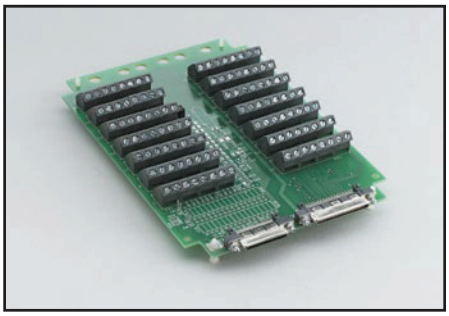

STP-3110: Screw Terminal Panel. Mounts on a panel and includes nylon standoffs for tabletop applications. For use with KPCI-3110 and -3116 data acquisition boards. CAB-307 and CAB-308 cables are required.

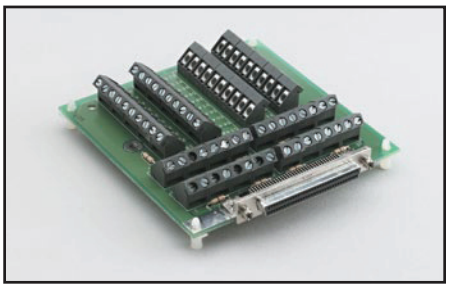

STP-3140: Screw Terminal Panel. Brings all KPCI-3140 signals out to external screw terminals. The STP-3140 comes with nylon standoffs, making it ideal for placing on a desktop or mounting in custom panels. Requires CAB-305 cable (1m/39″).

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP