

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Piezoresistive Pressure Transmitters

Standard and programmable (PRO) versions

Series 21 / 21 PRO

The KELLER Series 21 / 21 PRO are extremely reliable and cost effective pressure transmitters. These pressure transmitters use a programmable KELLER-ASIC microchip called ”ProgRes” (programmable resistors). The ”ProgRes” chip enables the transmitters to be set up and calibrated using automated test equipment, for improved product quality and lower costs. The PRO versions also have the unique feature that they can be programmed or re-ranged by the end user, via the hand held PP-96 programmer. Since its first introduction in 1989, the Series 21 / 21 PRO was an immediate success, thousands of transmitters and hundreds of programmers are in daily service worldwide.

This transmitter uses the KELLER Series 6 SC capsule as the core. The sensor is a piezoresistive silicon pressure sensor, mounted in an oil filled capsule. The media pressure is isolated by a stainless steel diaphragm and transferred to the silicon sensor hydraulically via the oil.


The ”ProgRes” circuit has programmable resistor networks, to set the Zero / Gain and thermal coefficients. All Series 21 / 21 PRO transmitters are subjected to comprehensive test procedures which cycle both pressure and temperature, the various parameters are then automatically calibrated and set by the computer controlled test rig at the end of the run. A final test then checks that the settings are correct and within specification, only then are the transmitters are released for use. Note: The standard Series 21 transmitters are NOT user programmable.

The programmable version transmitters, Series 21PRO has the data lines brought out to an Amphenol 8-pin connector, allowing simple and precise adjustment of Zero and Span. The KELLER Programmer PP-96 is used to facilitate programming of individual transmitters. The PP-96-10 can handle up to 10 identical transmitter at one time.


The signal output of a PRO version transmitter may be adjusted to give full-scale between 40% and 120% of the nominal range, and ± 20% zero adjustment.



Series 21, Cable or Plug

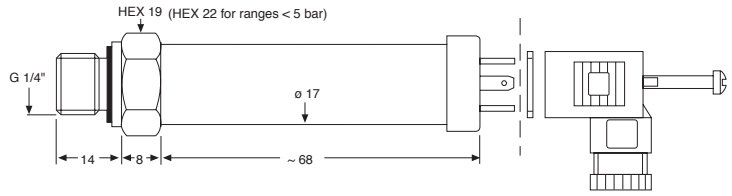

Series 21 PRO, Amphenol Plug C91 (8-pin)

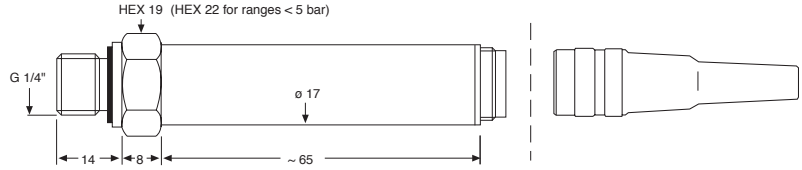

Electrical Connections

Series 21, with Cable

	2-Wire	3-Wire
GREEN		GND
WHITE	OUT/GND	+OUT
BROWN	+Vcc	+Vcc

Series 21, with mPm 393-Connector

Pin	2-Wire	3-Wire
1	OUT/GND	GND
2		+OUT
3	+Vcc	+Vcc

Series 21 / 21 PRO, Amphenol C91-Connector

Pin	2-Wire	3-Wire
4	+Vcc	+Vcc
6		+OUT
8	OUT/GND	GND

Pin Assignment of Programming Lines (Pro)

Pin	Data Line
1	SIO
2	VPROG
3	DATA
5	WRITE
7	CLOCK

Subject to alterations

6/02

KELLER AG für Druckmesstechnik St. Gallerstrasse 119 CH-8404 Winterthur Tel. 052 - 235 25 25 Fax 052 - 235 25 00
KELLER Gesellschaft für Druckmesstechnik mbH Schwarzwaldstrasse 17 D-79798 Jestetten Tel. 07745 - 9214 - 0 Fax 07745 - 9214 - 50

KELLER

SPECIFICATIONS

(**BR**: **Basic Range** of transducer) (**FS:** adjusted **Full Scale**)

	PRESSURE RANGES (BASIC RANGE). OVERPRESSURE. IN BAR										
PR-21, PR-21 PRO	**-1**	**1**	**2**	**5**	**10**	**20**					
PAA-21, PAA-21 PRO		**1**	**2**	**5**	**10**	**20**					
PA-21, PA-21 PRO				**5**	**10**	**20**	**50**	**100**	**200**	**400**	**600**
Overpressure	-1	3	4	10	20	30	75	150	300	500	700
Adjustment Range (PRO-Version)											
Minimum:	-0,4	0,4	0,8	2	4	8	20	40	80	160	240
Maximum:	-1	1,2	2,5	6	12	25	60	125	250	500	700

PR: Vented Gauge. Zero at atmospheric pressure PAA: Absolute. Zero at vacuum PA: Sealed Gauge. Zero at 1000 mbar abs.

Signal Output	4…20 mA	0…10 Vdc	0…20 mA
Supply Voltage	8…28 Vdc	13…28 Vdc	8…28 Vdc
Load Resistance	R_Ω = (U - 8 V) / 0,02 A	> 5 kΩ	R_Ω = (U - 8 V) / 0,02 A
Current required	max. 25 mA	5 mA max.	max. 25 mA
Zero/Span Tolerance	± 0,5% BR	± 0,5% BR	± 0,5% BR
Configuration	2 Wire	3 Wire	
Electrical Connection:	OUT/GND: Pin 1 / White	GND: Pin 1 / Green	
mPm 393 or		+OUT: Pin 2 / White	
cable 2 m	+Vcc: Pin 3 / Brown	+Vcc: Pin 3 / Brown	
Linearity	± 0,2% BR typ.	± 0,5% BR max.	
Total Error Band * +18…+22°C	± 0,5% BR max.	≤ 2 bar: ± 1% BR max.	
Total Error Band * 0…+50°C	± 1,0% BR max.	≤ 2 bar: ± 1,5% BR max.	
Total Error Band * -20…+80°C	± 2,5% BR max.	≤ 2 bar: ± 3% BR max.	

* Total error band includes linearity, hysteresis, repeatability, zero/span offsets and temperature effects.

Storage - / Operating Temperature	-40...100 °C / -20...80 °C
Compensated Temperature Range	0...50 °C (others on request)
Temperature-Coefficients…	
· Zero	typ. ≤ 0,1% BR / 10 K max. ≤ 0,2% BR / 10 K
· Sensitivity	typ. ≤ 0,1% / 10 K max. ≤ 0,2% / 10 K
Stability	≤ 0,2% FS / year
Electrical Connection	Series 21: mPm-Connector 393, incl. female connector or 2m screened cable Series 21 PRO: Amphenol C91 (8-pin), incl. female connector
Dead Volume Change	< 0,1 mm^3
Pressure Connection	G 1/4" male, Viton©-Eolastic©-seal
Materials in Contact with Media	Stainless steel AISI 316
Protection, CEI529	mPm-plug or cable: IP 65 Amphenol-plug: IP 40
Weight (Plug Version)	≈ 85 g
Insulation	> 100 MΩ / 500 V
Pressure Endurance	10 million pressure cycles 0…100% FS at 25 °C
Vibration Endurance	20 g (5...2000 Hz, max. amplitude ± 3 mm), according to IEC 68-2-6
Shock Endurance	20 g (11 ms)

CE

OPTIONS

Pressure Connection	G 1/4" female, 7/16"-20-UNF male/female, 1/4"-18-NPT male, M 12 x 1,5 male
Electrical Connection	Plug DIN 43650, others on request
Output signals	0...5 V, 0,5…4,5 V, others on request
Oil Filling	Halocarbon-oil for oxygen applications, olive-oil for food applications

Subject to alterations 6/02

KELLER AG für Druckmesstechnik St. Gallerstrasse 119 CH-8404 Winterthur Tel. 052 - 235 25 25 Fax 052 - 235 25 00
KELLER Gesellschaft für Druckmesstechnik mbH Schwarzwaldstrasse 17 D-79798 Jestetten Tel. 07745 - 9214 - 0 Fax 07745 - 9214 - 50

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP