

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Keysight / Agilent 5335A* at our website: ***Click HERE***

ELECTRONIC COUNTERS

Our Highest Performance Universal Systems Counter

HP 5335A

- A high performance 200 MHz/2 ns Universal Counter
- Built-in automatic rise time, duty cycle, pulse width, slew rate and phase measurements
- Advanced automatic triggering capabilities
- HP-IB plus math and statistics functions standard

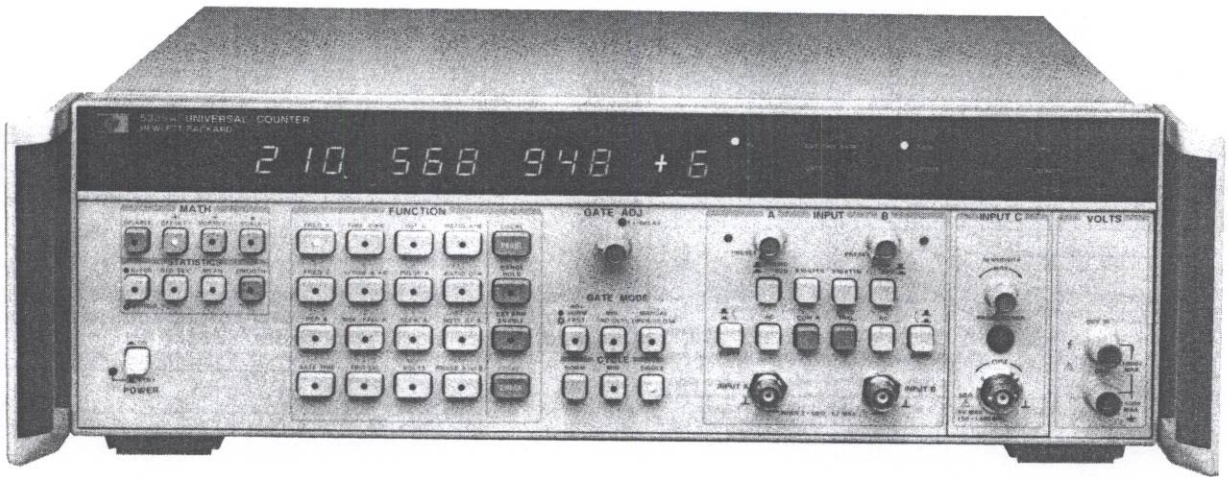

DESIGNED FOR HP-IB SYSTEMS

HP 5335A

Remarkable Automatic Measurement Power

The HP 5335A is an advanced universal counter with automatic measurement power built in. Designed either for bench or systems applications, the counter has 16 front-panel measurement functions, plus four "phantom" functions, all automatically selected by push button or by HP-IB. These twenty functions, plus greatly expanded arming and triggering capability, make the HP 5335A a most powerful universal counter. In addition, math and statistics features, matched Channel A and B input amplifiers, and HP-IB are all included in the standard unit, making the HP 5335A easily the most advanced universal counter available at its price.

Pulse Characterization Measurements

The HP 5335A possesses the expected universal measurements, and does them better than ever before. Beyond the expected measurement set, the HP 5335A has the ability to automatically measure waveform characteristics for various applications. Op amp characterization is one area where a number of measurements are needed to define the amplifier's performance. Using the HP 5335A and a signal source, rise and fall times, output slew rate, and propagation times can be measured with one test set-up. Also, duty cycle can be measured to see the distortion on a square wave through the amplifier due to different rising and falling slew rates. Phase measurements are also push-button selectable and automatically performed by the counter.

Complete Triggering Capability

To get good measurement results, a counter must properly trigger on the input signal. The HP 5335A employs both manual and automatic trigger modes to quickly and easily set the right trigger points.

Manual Triggering

The counter has a ±5 Vdc range to help reduce input attenuator use for most input signals, including TTL.

Automatic Triggering

Two auto trigger modes help you trigger automatically. Just press *auto trig* or select auto trig on the HP-IB and the counter automatically selects 10%-90% rise/fall time trigger points, 50% phase trigger points, or the preset value of your choice. Then it tracks the signal's dc offset continuously to stay on the right trigger point. Option 040 allows programmability of trigger levels via HP-IB.

Trigger Level DVM

Built into the basic counter. Just press TRG LVL to see both input channel trigger levels displayed.

A Full Set of Universal Measurement Functions

In addition to waveform characterization features, the HP 5335A has an extremely wide set of measurement functions covering frequency, time, events and volts. These functions let you characterize signals quicker and more thoroughly than ever before possible.

Frequency

Frequency is the most common measurement performed by counters. The HP 5335A measures to 200 MHz in Channel A, 100 MHz in Channel B, and 1.3 GHz in its optional Channel C. Due to the counter's advanced design and reciprocal measurement technique, resolution is a constant 9 digits per second of gate time across its entire measurement range.

Time

In a universal counter, a time interval measurement equates to a stopwatch measurement started and stopped by unique events. Precision is dependent on the counter's circuitry.

To ensure precision, the HP 5335A has matched custom input amplifiers to greatly reduce trigger errors that might be produced if the start and stop signals were amplified differently. Further, the counter employs an analog interpolation technique that turns its 10 MHz clock into the equivalent of a 1 GHz time base. The HP 5335A is thus able to resolve single shot time interval measurements to better than 2 nanoseconds (100 ps with averaging). This analog interpolation eliminates the need found in some counters for a phase-modulated (jittered) time base for time interval average measurements.

Math and Statistics

Averaging techniques are often used to extend the resolution of a counter. For averaging, the HP 5335A provides sample sizes of N = 100 or N = 1,000. Best of all, averaging can be employed for all measurements except phase. In addition to mean, and selection of sample size, the counter takes standard deviations of the current measurement for the sample size selected.

Math functions are another built-in feature that provide operator convenience. These functions let you convert the display into direct indications of parameters like flow, speed, pressure, and temperature. Additionally, the counter remembers the offset, scale, and normalize factors for each measurement function.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Condensed Specifications

Input Characteristics (channel A and B)

Range
DC coupled, 0 to 100 MHz.
AC 1 MΩ, 30 Hz to 100 MHz.
AC 50 Ω, 200 kHz to 100 MHz.
NOTE: Channel A range 200 MHz when in Frequency A and Ratio modes.

Sensitivity (X1)
25 mV rms sinewave.
75 mV peak-to-peak pulse at minium pulse width of 5 ns.

Dynamic Range (X1)
75 mV to 5 V peak-to-peak, to 100 MHz.
75 mV to 2.5 V peak-to-peak, >100 MHz.

Signal Operating Range (X1, DC)
−5 V dc to +5 V dc.

Trigger Level Range (X1)
Auto Trigger OFF
Preset: set to 0 V dc NOMINAL.
Adjustable: −5 V dc to +5 V dc.
Auto Trigger ON
Preset: set to nominal 50% point of input signal.
Adjustable: nominally between + and − peaks of input signal.

Auto Trigger (X1)
Range (50% duty cycle)
DC coupled, 30 Hz to 200 MHz.
AC 1 MΩ, 30 Hz to 200 MHz.
AC 50 Ω, 200 kHz to 200 MHz.
Minimum signal: 100 mV rms.
Duty cycle range: 10% to 90%.
Response time: 3 seconds, typical.
NOTE: Auto Trigger requires a repetitive signal.

Coupling: ac or dc, switchable.
Impedance: 1 MΩ, nominal, shunted by <35 pF or 50 Ω nominal, switchable. In COMMON A, 1 MΩ is shunted by <50 pF.
Attenuator: X1 or X10 nominal, switchable.
Slope: independent selection of + or − slope.
Channel input: SEPARATE or COMMON A, switchable.

Frequency A
Range: 0 to 200 MHz, prescaled by 2.

LSD Displayed

$$\frac{1\text{ ns}}{\text{Gate Time}} \times \text{FREQ. (e.g. 9 digits in a second).}$$

Resolution

$$\pm (2 \times \text{LSD}) \pm 1.4 \times \frac{\text{Trigger Error}}{\text{Gate Time}} \times \text{FREQ.}$$

Accuracy: ± (Resolution) ± (Time Base Error) × FREQ.

Period A
Range: 10 ns to 10^7 s.

LSD Displayed

$$\frac{1\text{ ns}}{\text{Gate Time}} \times \text{PER. (e.g. 9 digits in a second).}$$

Period average: user selects MEAN function, and n = 100, or n = 1,000.

Time Interval A→B
Range: 0 ns to 10^7 s.
LSD displayed: 1 ns (100 ps using MEAN).
Resolution: ± (2 × LSD) ± (START Trigger Error) ± (STOP Trigger Error).
Accuracy: ± (Resolution) ± (Time Base Error) × TI ± (Trigger Level Timing Error) ± (2 ns).
Gate mode: MIN only.
Time internal average: user selects MEAN function, and n = 100, or n = 1,000.

Time Interval Delay (holdoff)
Front panel Gate Adjust control inserts a variable delay between START and enabling of STOP. Electrical inputs during delay are ignored. Delay ranges are same as gate time ranges (100 μs, to 4 s NOMINAL) for gate modes of Fast, Norm, and Manual.

Inverse Time Interval A→B
Range: 10^{-7} to 10^9 units/second.
LSD Displayed, Resolution, and Accuracy are inverse of Time Interval A→B specifications.

Rise and Fall Time A
Range: 20 ns to 10 ms transition with 50 Hz to 25 MHz repetition rates (50% duty cycle).
Minimum pulse height: 500 mV peak-to-peak.
Minimum pulse width: 20 ns.
Duty cycle range: 20% to 80%.
LSD Displayed and Resolution are same as Time Interval A→B Specifications.

Pulse Width A
Range: 5 ns to 10^7 s.
Trigger point range: 40% to 60% of pulse height.
LSD Displayed and Resolution are same as Time Interval A→B specifications.

Duty Cycle A
Range: 1% to 99%, 0 to 100 MHz.
Trigger point range: 40% to 60% of pulse height.

LSD displayed: $\frac{1\text{ ns}}{\text{PER}} \times 100\%$

NOTE: Constant duty cycle required during measurement.

Slew Rate A
Range: 50 V/s to 10^8 V/s slew rate with 50 Hz to 25 MHz repetition rates (50% duty cycle). Minimum Pulse Height, Width, and Duty Cycle Range are same as Rise and Fall Time A.
Input mode: automatically set to COMMON A with 10% and 90% trigger levels.

Ratio A/B
Range: Channel A, 0 to 200 MHz (prescaled by 2).
Channel B, 0 to 100 MHz.

LSD displayed: $\frac{\text{RATIO}}{\text{FREQ} \times \text{Gate Time}}$ where FREQ is higher frequency after prescaling.

Totalize A
Range: 0 to 100 MHz.
LSD displayed: 1 count of input.
HP-IB output: at end of gate.

Manual
Count reset: via RESET key.
HP-IB output: totalize data on-the-fly sent if Cycle mode set to Single. Input frequency range in this mode is 0 to 50 Hz nominal.
Gated
Count reset: automatic after measurement.

Phase A Rel B
Range: −180° to 360°, Range Hold off, or 0° to 360°, Range Hold on, with signal repetition rates of 30 Hz to 1 MHz.
Minimum signal: 100 mV rms.
LSD displayed: 0.1°.

Gate Time
Range: 100 ns to 10^7 s.
LSD displayed: up to three digits with Ext. Arm Enable OFF, 100 ns when ON. MIN Gate Mode display zero.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ELECTRONIC COUNTERS

Our Highest Performance Universal Systems Counter (cont'd)

HP 5335A

Trigger Level
Range: ×1, +5 to −5 V; ×10, +50 to −50 V.
Resolution: ×1, 10 mV; ×10, 100 mV.
Accuracy (×1): ±20 mV, ±0.5% of reading.

Time Base
Standard Crystal
Frequency: 10 MHz.
Aging rate: $<3 \times 10^{-7}$/month.
Temperature: $< 4 \times 10^{-6}$, 0 to 50°C.
Line voltage: $<1 \times 10^{-7}$ for 10% change.
High stability crystal: see Option 010.
External time base input: rear panel BNC accepts 5 or 10 MHz, 200 mV rms into 1 kΩ; 5 V rms maximum.
Time base out: 10 MHz, >1 V p-p into 50 Ω via rear panel.

Statistics
Sample size: selectable between either n = 100 or n = 1,000 samples.
Std. dev.: displays a standard deviation of selected sample size.
Mean: displays mean estimate of selected sample size.
Smooth: performs a weighted running average and truncates unstable least significant digits from display.

Math
All measurement functions, with exception of GATE TIME, Totalize in Scale Mode, and TRIG LVL, may be operated upon by Math functions. Offset, Normalize, and Scale may be used independently or together as follows:

$$\text{Display} = \frac{\text{Measurement} + \text{Offset}}{\text{Normalize}} \times \text{Scale}.$$

Number value range: $\pm 1 \times 10^{-9}$ to $\pm 9 \times 10^{9}$.
Last display: causes value of previous display to Offset (negative value), Normalize, or Scale all subsequent measurements.
Measurement t-1: causes each new measurement to be Offset (negative value), Normalized, or Scaled by each immediately preceding measurement.

Hewlett-Packard Interface Bus
Programmable controls: all measurement functions, Math, Statistics, Reset, Range Hold, Ext. Arm Enable/Slope, Check, Gate Adj. (~ 1 ms to 1 s), Gate Open/Close (gate times to ∞), Gate Mode, Cycle, Preset, Slope, Common A, Auto Trigger.
Special functions: FREQ B, PULSE B, TIME B→A, TOT A-B, LEARN, MIN, MAX, all internal diagnostic routines.
Interface functions: SH1, AH1, T5, TEØ, L4, LEØ, SR1, RL1, PPØ, DC1, DT1, C0, (see page 579).
Data output: fixed output format consisting of 19 characters plus CR and LF output in typically 8 ms.
Option 040: adds complete systems programmability; see column at right.

General
Gate: minimum, manual, or continuously variable (NORM/FAST) via Gate Adj. control.
NORM: 20 ms to 4 s NOMINAL.
FAST: 100 μs to 20 ms NOMINAL.
MIN: minimum gate time. Actual time depends on function.
MANUAL: each press opens or closes gate.

Cycle: determines delay between measurements.
NORM: no more than 4 readings per second, nominal.
MIN: updates display as rapidly as possible (~ 15 readings per second, depending on function).
SINGLE: one measurement taken with each press of button.
Arming: Ext. Arm Enable key allows rear panel input to determine Start and/or Stop point of a measurement. External gate defined by both Start and Stop armed. All measurements are armable except Manual Totalize, Phase, and Trigger Level.
Start arm: + or − slope of arm input signal starts measurement.
Stop arm: + or − slope of arm input signal stops measurement. When used, Start Arm must occur before Stop Arm.
Ext. arm input: rear panel BNC accepts TTL into 20 kΩ. Minimum Start To Stop Time: 200 ns.
Trigger level out: dc output into 1 MΩ via rear panel BNCs for Channel A and B; not adjusted for attenuators.
Accuracy at dc (×1): ±15 mV ±0.5% of TRIG LVL reading.
Gate out: TTL level into 50 Ω; goes low when gate open; rear panel BNC.

Range hold: freezes decimal point and exponent of display.
Reset: starts a new measurement cycle when pressed.
Check: performs internal self test and lamp test.
Display: 12-digit LED display in engineering format; exponent range of +18 to −18.
Operating temperature: 0 to 50°C.
Power requirements: 100, 120, 220, 240 VAC (+5%, −10%), 48-66 Hz; 130 VA max.
Weight: net, 8.8 kg (19 lb 8 oz). Shipping, 13.6 kg (30 lb).
Dimensions: 425.5 mm W x 132.6 mm H x 345.4 mm D (16¾ in. x 5¼ in. x 13½ in.), not including removable handles.

Options
Option 010: High Stability Time Base (oven)
Frequency: 10 MHz.
Aging rate: $< 5 \times 10^{-10}$/day after 24-hour warm up.
Short term: $< 1 \times 10^{-10}$ rms for ls average.
Temperature: $< 7 \times 10^{-9}$, 0 to 50°C.
Line voltage: $< 1 \times 10^{-10}$ for 10% change.
Warm-up: within 5×10^{-9} of final value in 20 minutes.

Option 020: DC Digital Voltmeter
Range: 4 digits, autoranging, autopolarity, in ±10, ±100, ±1000 V ranges.
Sensitivity: 100 μV, 1 mV, 10 mV, 100 mV for ±1 V, ±10 V, ±100 V, ±1000 V readings.
LSD displayed: same as sensitivity.
Input type: floating pair.
Input impedance: 10 MΩ ± 1%.

Option 030: 1.3 GHz C Channel
Input Characteristics
Range: 150 MHz to 1.3 GHz.
Sensitivity: 10 mV rms sinewave (−27 dBm) to 1 GHz. 100 mV rms sinewave (−7 dBm) to 1.3 GHz.

Frequency C
Range: 150 MHz to 1.3 GHz, prescaled by 20. LSD Displayed, Resolution, and Accuracy are same as Frequency A.

Ratio C/A
Range: channel A, 0 to 200 MHz.
channel C, 150 to 1300 MHz.

Option 040: Complete Systems Programmability
Adds remote selection of low pass filter, ac/dc coupling, ×1-×10 attenuation, dc trigger level and input impedance for both Channel A and B.

Definitions
Duty cycle: percentage of time a signal is high or low, depending on Slope A setting. Trigger point is high/low dividing point.

$$\text{DUTY CY} = \frac{\text{PULSE}}{\text{PER}} \times 100\%.$$

Slew rate: effective slope between 10% and 90% points of rising or falling signal depending on Slope A setting.

$$\text{SLEW} = \frac{V_B - V_A}{\text{TI}}$$

Phase: angle, with respect to B signal, between 50% points of channel A and B signals, trigger slopes selected by Channel A and B slope switches.

$$\text{PHASE} = \frac{(\text{TI}_1 + \text{TI}_2)\ 360°}{2\ \text{PER}}$$

TI_1 is time between 50% points of A then B signals using slopes defined during Phase measurement.

TI_2 is time between 50% points of A then B signals using complement slopes to TI_1.

Front handles: supplied with instrument.

Ordering Information
HP 5335A Universal Counter
Opt 010 Oven Oscillator
Opt 020 DVM
Opt 030 C Channel
Opt 040 Expanded HP-IB Control
Opt 908 Rack Flange Kit for use without handles.
Opt 913 Rack Flange Kit for use with supplied front handles.
Opt W30 Extended repair service. See page 723.
Opt W32 Calibration service. See page 723.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP