

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

**Artisan Technology Group**
(217) 352-9330 | sales@artisantg.com | artisantg.com

**Full-service, independent repair center**
with experienced engineers and technicians on staff.

**We buy your excess, underutilized, and idle equipment**
along with credit for buybacks and trade-ins.

**Custom engineering**
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


**Expert team | Trust guarantee | 100% satisfaction**

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

**Visit our website - *Click HERE***

HP Computer Systems

# HP 98628A/98691A
# Datacomm Interface Installation

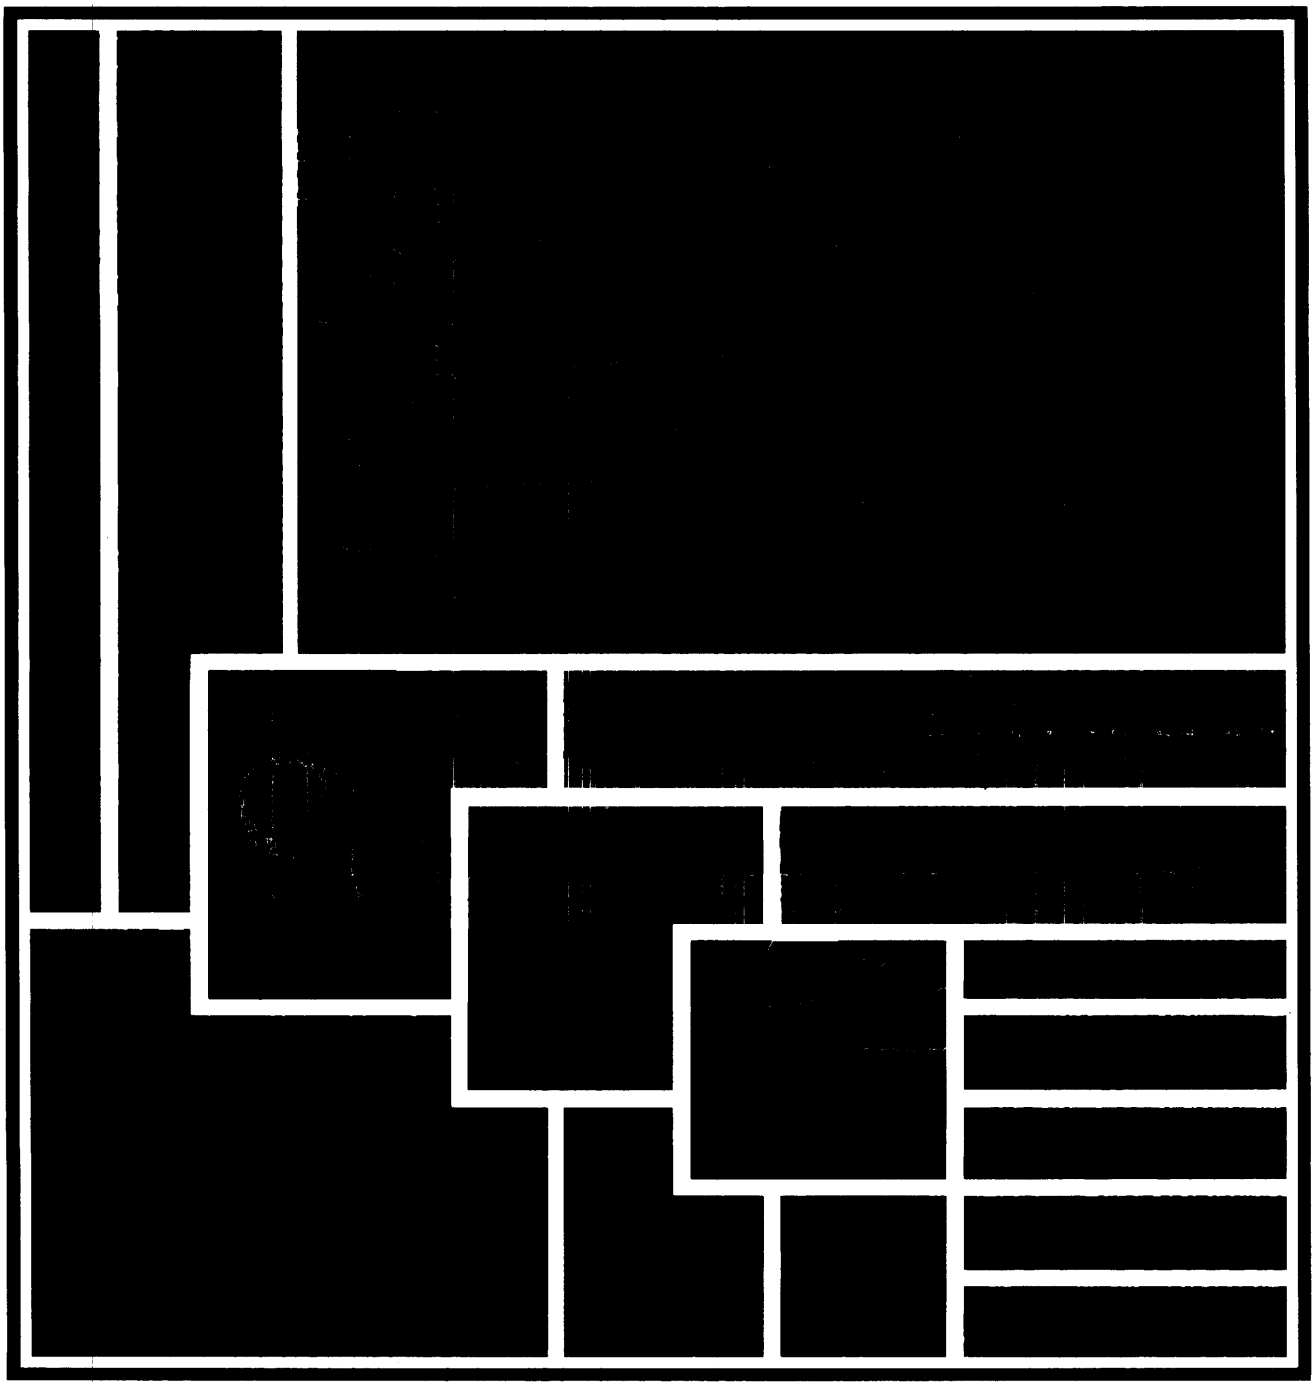

HEWLETT
PACKARD

HEWLETT PACKARD

## Warranty Statement

Hewlett-Packard products are warranted against defects in materials and workmanship. For Hewlett-Packard Desktop Computer Division products sold in the U.S.A. and Canada, this warranty applies for ninety (90) days from the date of delivery.* Hewlett-Packard will, at its option, repair or replace equipment which proves to be defective during the warranty period. This warranty includes labor, parts, and surface travel costs, if any. Equipment returned to Hewlett-Packard for repair must be shipped freight prepaid. Repairs necessitated by misuse of the equipment, or by hardware, software, or interfacing not provided by Hewlett-Packard are not covered by this warranty.

HP warrants that its software and firmware designated by HP for use with a CPU will execute its programming instructions when properly installed on that CPU. HP does not warrant that the operation of the CPU, software, or firmware will be uninterrupted or error free.

NO OTHER WARRANTY IS EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTIBILITY AND FITNESS FOR A PARTICULAR PURPOSE. HEWLETT-PACKARD SHALL NOT BE LIABLE FOR CONSEQUENTIAL DAMAGES.

*For other countries, contact your local Sales and Service Office to determine warranty terms.

# HP 98628A/98691A
# Datacomm Interface Installation

*for HP Series 200 Computers*

Manual Part No. 98628-90001

© Copyright Hewlett-Packard Company 1982, 1983, 1985
This document refers to proprietary computer software which is protected by copyright. All rights are reserved. Copying or other reproduction of this program except for archival purposes is prohibited without the prior written consent of Hewlett-Packard Company.

**Hewlett-Packard**
Roseville Networks Division
8000 Foothills Boulevard
Roseville, California 95678

# Printing History

New editions of this manual will incorporate all material updated since the previous edition. Update packages may be issued between editions and contain replacement and additional pages to be merged into the manual by the user. Each updated page will be indicated by a revision date at the bottom of the page. A vertical bar in the margin indicates the changes on each page. Note that pages which are rearranged due to changes on a previous page are not considered revised.

The manual printing date and part number indicate its current edition. The printing date changes when a new edition is printed. (Minor corrections and updates which are incorporated at reprint do not cause the date to change.) The manual part number changes when extensive technical changes are incorporated.


First Edition ..... November 1982
Update 1 ..... October 1983
Reprint (incorporating update 1) ..... October 1983
Update 2 ..... December 1983
Reprint (incorporating update 2) ..... December 1983
Update 3 ..... February 1985

# Table of Contents

**Chapter 1: General Information**

Introduction . . . . . 1
Unpacking and Inspection . . . . . 2
Handling . . . . . 2
Technical Spcifications . . . . . 3
Product Description . . . . . 3
Cable Options . . . . . 4
Specialized Adapters . . . . . 6

**Chapter 2: Interface Configuration**

Configuration Switches . . . . . 7
Interrupt Level and Select Code . . . . . 8
Remote Switch . . . . . 8
Interrupt Level . . . . . 8
Interface Select Code . . . . . 8
Protocol Configuration . . . . . 10
Async/Data Link Protocol Selection . . . . . 10
Async Protocol Default Configuration . . . . . 10
Data Link Protocol Default Configuration . . . . . 11
Interface Installation . . . . . 12

**Chapter 3: Interface Cables**

RS-232C Connections . . . . . 13
Optional Drivers and Receivers . . . . . 13
Option 001 DTE (Male) Cable . . . . . 14
Option 002 DCE (Female) Cable . . . . . 15
Connecting Two Desktop Computers . . . . . 16
Using DCE Cables to Connect to DTE Devices . . . . . 17
RS-449 Connections . . . . . 17
Option 003 RS-423 Unbalanced DTE Cable . . . . . 17
Test Connectors . . . . . 19
RS-232C DTE Cable Test Connector . . . . . 19
RS-232C DCE Cable Test Connector . . . . . 19
RS-449 Cable Test Connector . . . . . 20
Building Custom Cables . . . . . 21
Safety Considerations . . . . . 21
Using Interface Power Connections . . . . . 21
Balanced Versus Unbalanced Connections . . . . . 21
Comparison of Datacomm Standards . . . . . 23

**Chapter 4: Service Information**


Theory of Operation . . . . . 25
Z-80A System Operation . . . . . 26
Select Code Recognition . . . . . 26
Interrupt System . . . . . 27
Interface Reset . . . . . 27
Shared Memory Controller . . . . . 28
Addressing . . . . . 28
Read/Write Control . . . . . 28
Clock Circuits . . . . . 28
Memory Access Select Timing . . . . . 29
Memory Cycle Timing . . . . . 29
Hardware Registers . . . . . 31
Shared RAM . . . . . 32
Default Switches . . . . . 33
Baud Rate Multiplexer . . . . . 33
Line Drivers and Receivers . . . . . 33
Replacement Parts . . . . . 34

# Chapter 1
# General Information

## Introduction

The HP 98628A Data Communications Interface and HP 98691A Programmable Datacomm Interface are microprocessor-based datacomm interfaces designed for use with HP Series 200 computers. Each interface contains a built-in microprocessor and associated circuits that perform all protocol management and signalling functions for data communications using RS-232C and RS-449 connections.

The HP 98628A Datacomm Interface supports two protocols:

- Asynchronous (Async) protocol commonly used for timesharing and remote host computer applications as well as connections to remote terminals.
- HP DSN/Data Link Protocol most commonly used with Data Link network applications based around an HP 1000 network host computer.

The HP 98691A Programmable Datacomm Interface is designed for installing custom protocols or protocols that are designed and supported by suppliers other than Hewlett-Packard Company. This interface is usually sold through the supplier of the custom protocol firmware.

Several cable options are also available, accommodating most popular interconnections to standard datacomm links and modems. They are discussed in Chapter 3.

# Unpacking and Inspection

If the shipping carton is damaged, ask the carrier's agent to be present when the interface is unpacked. If the interface is damaged or fails to operate properly, notify the carrier, and the nearest HP Sales and Service Office immediately if your interface is an HP 98628. Retain the shipping carton for the carrier's inspection. The sales and service office will arrange for the repair or replacement of your interface without waiting for the claim against the carrier to be settled. If your interface is an HP 98691 Programmable Datacomm Interface, contact the interface supplier for assistance in repair or replacement.

# Handling

Precautionary measures should be taken to protect interface printed circuit assemblies from static discharge during handling. Each interface is shipped in a protective anti-static bag which provides adequate anti-static protection for the interface as long as it remains inside the bag. It is good practice to use additional anti-static protection, such as commercially available personnel grounding straps when servicing or installing interfaces, memory boards, and other assemblies that may be sensitive to electro-static discharge.

Avoid touching integrated circuit leads while picking up or handling the interface. Static discharge through the leads can easily destroy sensitive components. Handle the board by the card edges or metal backplane cover plate. Do NOT handle the interface by its backplane edge connector. If the edge connector inadvertently gets dirty, it can be cleaned by using a cotton swab and isopropyl alcohol.

# Technical Specifications

## Product Description

The HP 98628A and 98691A are microprocessor-based (Zilog Z-80A or equivalent) data communications interfaces that fit the I/O backplane of HP Series 200 computers. The interface includes on-board read-write (RAM) memory for buffering and other needs. The microprocessor performs protocol management and other data communication functions, freeing the mainframe processor for other tasks. Protocol(s) supported by the interface depend on what programs are stored in the Program ROM that is plugged into the socket on the interface card.

### Physical Description

Size: 135 mm by 170 mm (5.3 in by 6.6 in)
Weight: 310 grams (11 ounces)

### Environmental Range

Temperature: 0°C to 45°C (32 to 113°F)
Humidity: 0 to 80% non-condensing

### Electrical Specifications

98628A power consumption (typical)

+5 V @ 710 mA
+12 V @ 37 mA
−12 V @ 60 mA

The following adapters also obtain power through the HP 98628 interface. Their consumption should be added to the interface power consumption when they are used. Typical values are shown.

HP 13264A Data Link Adapter:

+5 V @ 30 mA
+12 V @ 160 mA
−12 V @ 23 mA

HP 13265A Modem:

+5 V @ 100 mA
+12 V @ 45 mA
−12 V @ 45 mA

HP 13266A Current Loop Adapter:

+5 V @ 200 mA
+12 V @ 90 mA
−12 V @ 80 mA


### Electrical Interface Compatibility (with appropriate cables)

RS-232C (similar to CCITT V.24/V.28)
RS-449/RS-423 (similar to CCITT V.10)
RS-449/RS-422 (similar to CCITT V.11)[1]

1 RS-422 cables for this interface are not available from Hewlett-Packard Company


### RS-232C Data Rates
Up to 19,200 baud

### RS-449 Data Rates
Data rate limitations for RS-449 applications are dependent on cable length, but generally exceed the maximum rates available to RS-232C installations. The following charts show the maximum speed versus cable length for RS-422 (balanced) and RS-423 (unbalanced) RS-449 installations:

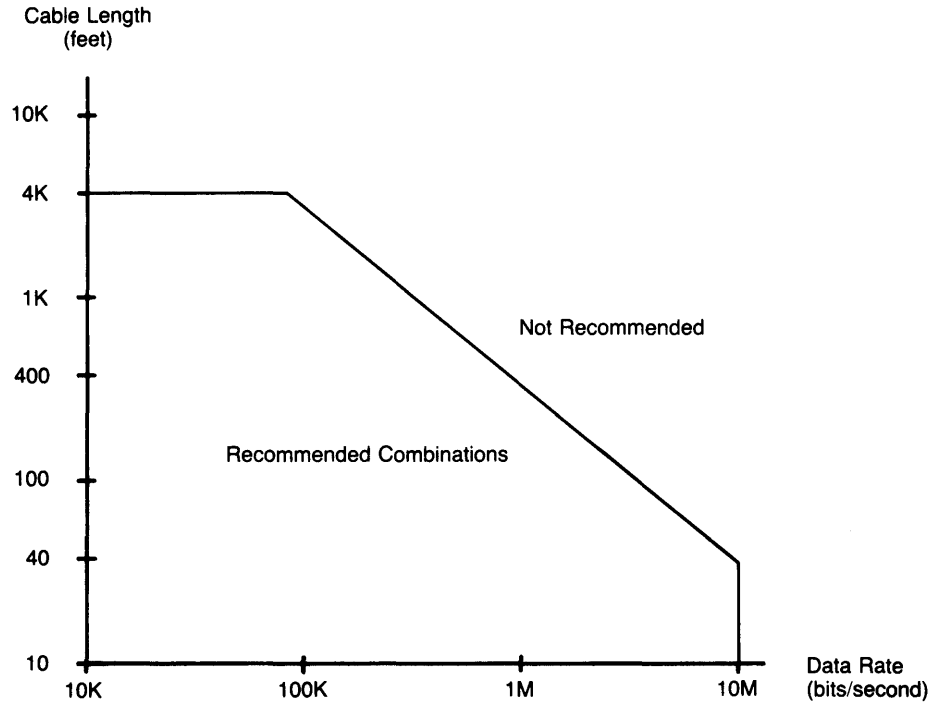


**RS-422 Modulation Rate Versus Cable Length**

The waveshaping used on the datacomm interface force a reduction in the maximum data rates that can be used for unbalanced transmissions. These limits are allowed by the RS-423 standard, and are indicated by the dotted lines in the following chart:

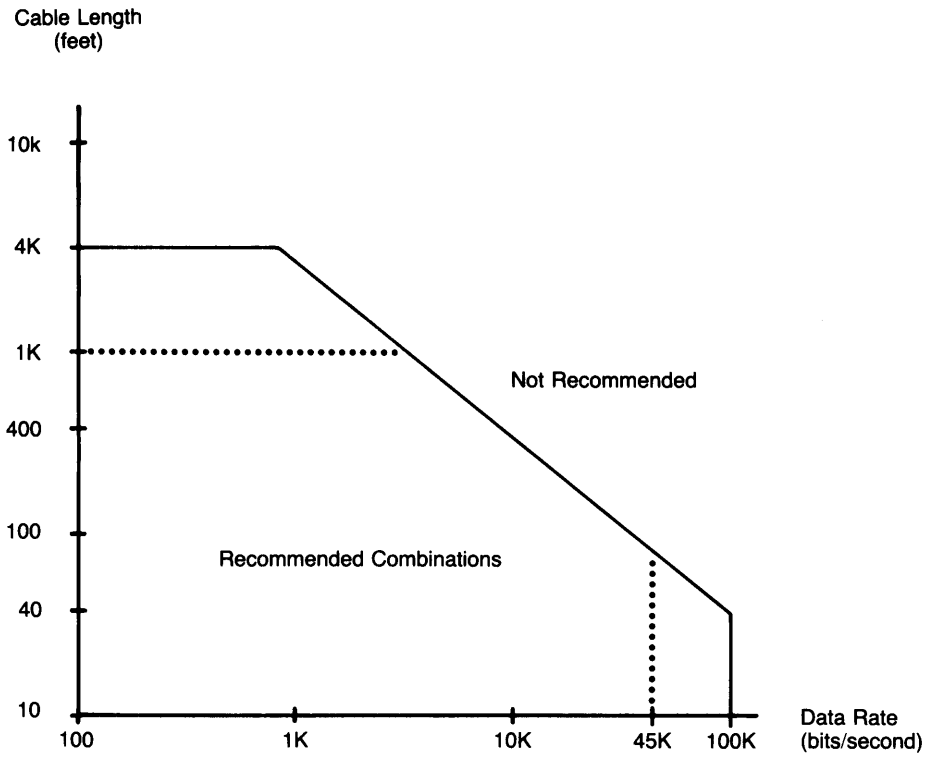


**RS-423 Modulation Rate Versus Cable Length**

RS-423 cables are discussed in Chapter 3.


## Cable Options

The HP 98628 and 98691 interfaces are available with 3 cable options which can also be ordered separately. Cable length is approximately 4.9 metres (16 feet). Cables are discussed in detail in Chapter 3.


**Option 001: RS-232C DTE Cable with 25-pin Male Connector**
Used to connect to RS-232C DCE devices such as modems. Also available separately as part number 5061-4215.

**Option 002: RS-232C DCE Cable with 25-pin Female Connector**
Used to connect to male RS-232C DTE device cables. Connects to 5061-4215 or other terminal cables. Available separately as part number 5061-4216.

**Option 003: RS-423 DTE Cable with 37-pin Male Connector**
Unbalanced connections to RS-449/423 modems or other DCE devices. Available separately as part number 5061-4250.

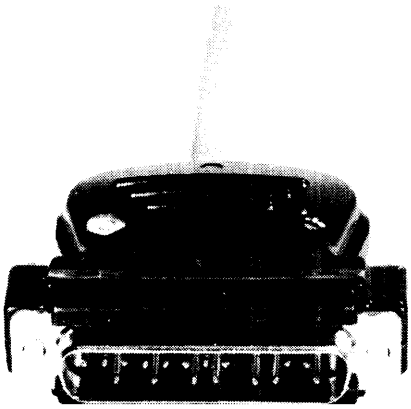

**Option 001 Male Connector**

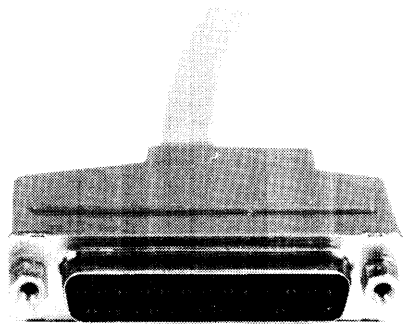

**Option 002 Female Connector**

## Specialized Adapters

Three specialized adapters are available for use with the 98628A. They provide a means for connecting the 98628A to various data communications devices or links, and include the following:

- HP 13264A Data Link Adapter
- HP 13265A Modem
- HP 13266A Current Loop Adapter

Here is a brief description of each adapter:

The HP 13264A Data Link Adapter converts RS-232C signals from the 98628A to the differential signal levels required for HP DSN/Data Link connections.

The HP 13265A Modem is a Bell 103/113-compatible asynchronous modem for connecting directly to the US switched (public) telephone network. This modem is originate only, and is used in applications requiring up to 300 baud communications rates. It supports both auto dial and manual originate capability.

The HP 13266A Current Loop Adapter provides a 20 mA current loop interface for the 98628A. Current loop is used in applications that require data communications over longer distances than are possible with standard RS-232C. It is also used in electically noisy environments. The Current Loop Adapter can be configured with active or passive driver and receiver elements.

# Chapter 2
# Interface Configuration


The datacomm interface is configured by use of two switch clusters located along one side of the interface card. These switches must be set to their proper positions before the interface is installed in the computer. This chapter discusses how to configure the interface for the various available options.

This chapter explains how to configure the HP 98628A Option 100 (Async/Data Link protocol) Datacomm Interface. If you are installing an HP 98691A Programmable Datacomm Interface (interface firmware designed by a supplier other than Hewlett-Packard Company), configure the select code and hardware interrupt level as described in this chapter, then configure the protocol switches using instructions provided by the supplier of the firmware that is installed on the interface card.

## Configuration Switches

As shown in the following figure, the left-hand switch cluster is used to set the hardware interrupt level and interface select code. The left-most switch in that cluster has a function that is dependent on protocol and defined by interface firmware.

The function of the switches in the right-hand cluster is determined by protocol and the interface program ROM. These switches are discussed later in this chapter. The following figure shows the location of the configuration switches.

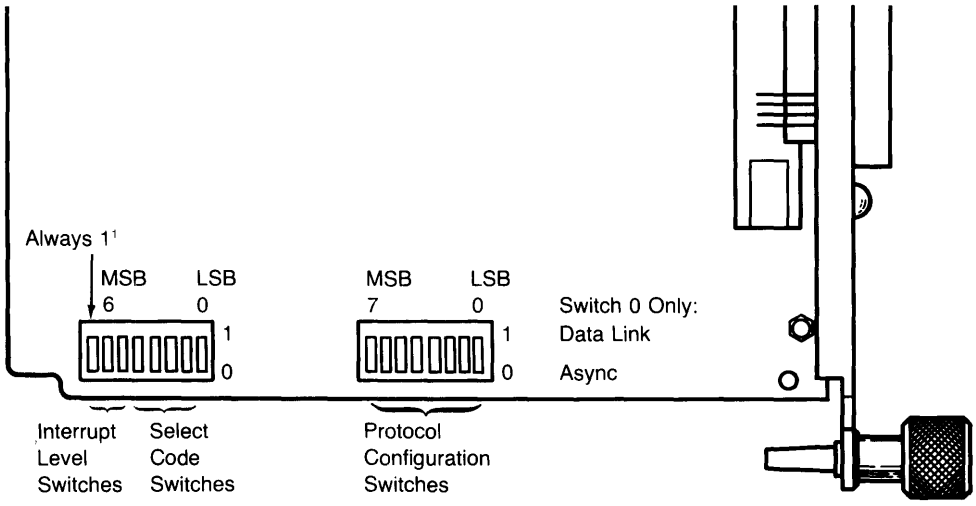


**Interface Configuration Switches**

1 This switch should always be set to 1 poisition on HP 98628 Datacomm Interface. If you are using an HP 98691 Programmable Datacomm Interface, refer to firmware documentation supplied with the interface for the proper switch setting.

When setting the configuration switches, be sure the switch rockers are fully depressed and properly seated. Switch settings can be changed by using a ball-point pen or a similar pointed tool to depress each switch rocker.

# Interrupt Level and Select Code

This section discusses the switch settings of the left-hand cluster. The function of each of these switches, except one, is determined by interface hardware, and is not protocol dependent.

## Remote Switch

The function of the left-most switch (switch 7) is protocol-dependent. If your interface is an HP 98628 (Async/Data Link Protocol), it is reserved for possible future use, and should be in the OFF (1) position. This ensures proper operation of the card during power-up and self-test operations. For the HP 98691 Programmable Datacomm Interface, consult the operating manuals provided by supplier of the special firmware installed on your interface.

## Interrupt Level

The next two switches define the hardware interrupt level. Levels 1 and 2 are reserved for internal peripherals only, leaving interrupt levels 3 thru 6 available for interfaces to external peripherals. Interrupt level 3 is lowest priority; 6 is highest. If an interrupt request conflict occurs, service is provided by the computer on the basis of highest priority first. If two devices at the same level interrupt simultaneously, the interrupts are serviced in the order they are encountered by the operating system.

When assigning interrupt levels, don't forget that some interfaces may require that no other interface be placed at the same interrupt level (such as the HP 98625 High-speed Disc Interface used in Shared Resource Management applications). The factory-default setting of interrupt level 3 is adequate for most applications. Here is a listing of the available interrupt level settings:

**Interrupt Level Switch Settings**

| Switch Settings 6 | 5 | Interrupt Level |
|---|---|---|
| 0 | 0 | 3 |
| 0 | 1 | 4 |
| 1 | 0 | 5 |
| 1 | 1 | 6 |

## Interface Select Code

Each internal peripheral and external peripheral interface has a unique interface select code by which it is accessed when the operating system must transfer information to or from that device. The interface select code is determined by hardware settings, but the interaction can vary, depending on the operating system and software being used.

Select codes 1 thru 6 are reserved for internal peripherals such as the keyboard, disc drives, CRT display and other devices. Select code 7 is used by the internal HP-IB interface, leaving select codes 8 thru 31 available for other interfaces to external peripherals. However, not all language options support the entire range of select codes, and default select codes for certain devices may vary, depending on the language being used. Refer to the interfacing or I/O manual for the language being used for more information about restrictions on select code values.

Some general guidelines apply to select code assignment regardless of which language is being used. The most important restriction is that you must never set more than one interface to a given select code value. Otherwise, the interfaces compete whenever any information transfer or control or status operation is performed on that select code. Each interface is marked with a recommended default setting. This setting is adequate for most languages, but may have to be altered in some specific instances, especially if one computer is being used for multi-language applications, and supports several peripherals.

**Note**

When assigning a select code other than the one printed on the interface cover, check the select code assignments for all other interface cards in the system. Do not assign the same select code to more than one interface.

Here are the available interface select code switch settings. The default setting of 20 is highlighted.

**Select Code Settings**

| Select Code | MSB 43210 LSB | Select Code | MSB 43210 LSB |
|---|---|---|---|
| 0 thru 7 | Do not use | **20** | **10100** |
| 8 | 01000 | 21 | 10101 |
| 9 | 01001 | 22 | 10110 |
| 10 | 01010 | 23 | 10111 |
| 11 | 01011 | 24 | 11000 |
| 12 | 01100 | 25 | 11001 |
| 13 | 01101 | 26 | 11010 |
| 14 | 01110 | 27 | 11011 |
| 15 | 01111 | 28 | 11100 |
| 16 | 01100 | 29 | 11101 |
| 17 | 10001 | 30 | 11110 |
| 18 | 10010 | 31 | 11111 |
| 19 | 10011 | | |

# Protocol Configuration

During system power-up or reset, the right-hand switch cluster configures protocol-dependent default operating parameters or functions. On the HP 98628 (Async/Data Link protocol) interface, these switches establish various operating parameters such as handshake protocol and baud rate. For the HP 98691, refer to the applicable firmware and protocol operating manuals for the needed information.


This section discusses protocol configuration switch settings for the Async/Data Link protocol interface, 98628A Option 100.

## Async/Data Link Protocol Selection

The right-most (bit 0) switch in the default cluster selects the power-up default of asynchronous (Async) or DSN/DL (Data Link) protocol. The function of the remaining 7 switches depends on which protocol is selected.

## Async Protocol Default Configuration

At power-up, the datacomm interface is automatically configured using the default switch settings. The initial configuration can be altered under program control by the use of CONTROL and STATUS statements in BASIC, or their equivalent in other languages. To use the default values, omit the corresponding control operations from your program. When Async protocol is selected[1], the remaining 7 switches have the following functions:

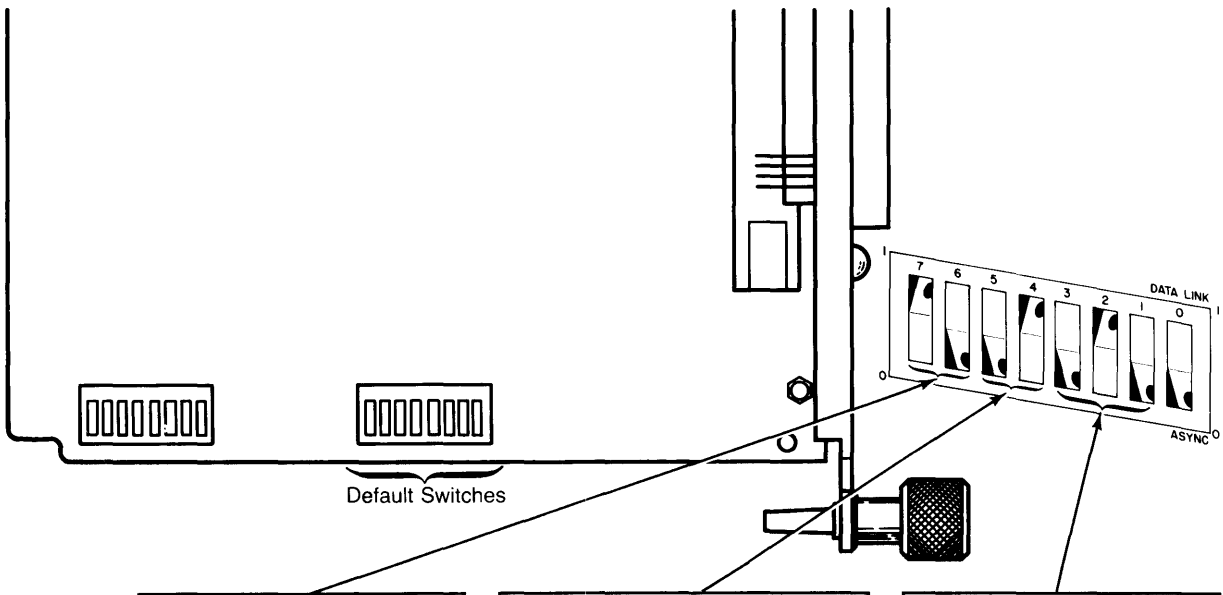


| Parity | Bits/Char |
|---|---|
| 00 = None | 8 |
| 01 = None | 7 |
| **10 = Odd** | **7** |
| 11 = Even | 7 |

| Hardware Handshake |
|---|
| 00 = Handshake OFF, non-modem connection[1] |
| **01 = FULL Duplex modem connection[2]** |
| 10 = HALF Duplex modem connection[2] |
| 11 = Handshake ON, non-modem connection[1] |

| Baud Rate | Stop Bits |
|---|---|
| 000 = 110 | 2 |
| 001 = 150 | 2 |
| **010 = 300** | **1** |
| 011 = 600 | 1 |
| 100 = 1200 | 1 |
| 101 = 2400 | 1 |
| 110 = 4800 | 1 |
| 111 = 9600 | 1 |

**Async Default Configuration Switches**

1 Protocol can also be overridden by CONTROL operations, but the other parameters established by default switches must be replaced by CONTROL operations in order to ensure proper configuration.


Before you set up the default switches, determine the proper operating parameters for your application, then set the parity, hardware handshake, and baud rate switches as indicated in the figure. Be sure that all switches are fully seated in their proper positions to ensure proper operation.

Character format parameters are determined by the requirements of the device at the other end of the datacomm link. If default switches are used to establish operating parameters, only parity and baud rate can be selected. Bits per character and stop bits per character are determined by the parity and baud rate settings. Default switch settings can be overridden under program control. Control register operations can be used to independently program all character format parameters (for example, bits per character and stop bits are not dependent on baud rate or parity settings). Status register operations can be used to determine current interface settings. Values returned represent current operation, and may not match the current default switch settings if a previous Control operation has overridden the switches.

For 3-wire non-modem connections, the hardware handshake is set to handshake OFF, non-modem connection. If the full complement of handshake signals such as data terminal ready, clear-to-send, etc. are available in non-modem connections, then set the switches to hardware handshake ON, non-modem connection. If modems are being used, set half/full duplex to the appropriate configuration. This completes default switch configuration for Async connections.

## Data Link Protocol Default Configuration

As when Async protocol is selected, the datacomm interface is automatically configured at power-up according to default switch settings. The initial configuration can be altered under program control by the use of CONTROL and STATUS statements in BASIC, or their equivalent in other languages. To use the default switch settings, omit the corresponding control operations from your program. When Data Link protocol is selected[1], the remaining 7 switches have the following functions:

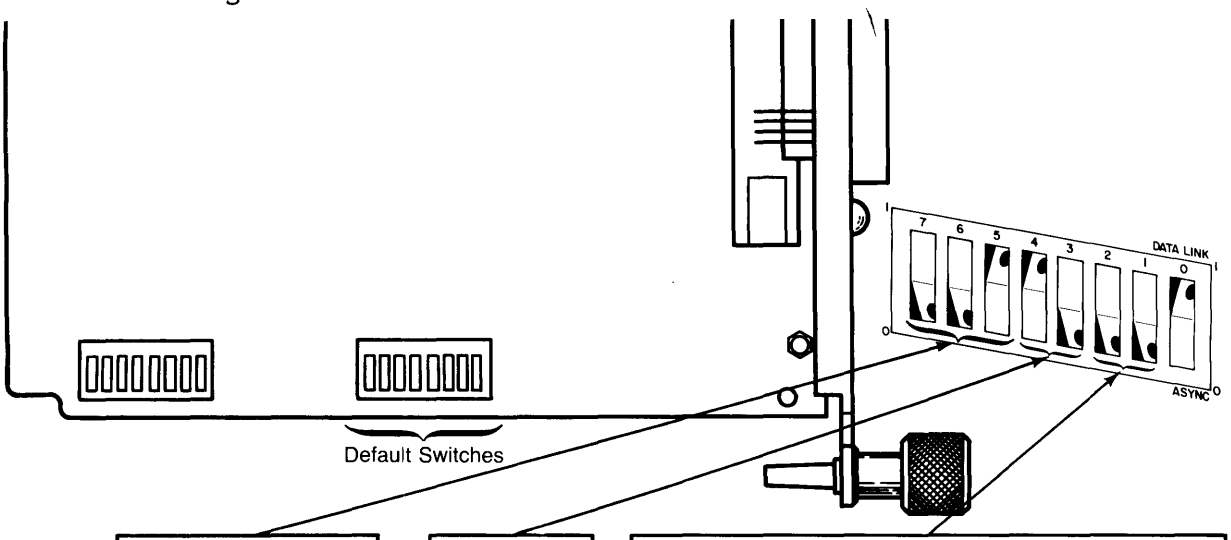


| DID: ("@"...."G") | |
|---|---|
| 000 = @ | 100 = D |
| **001 = A** | 101 = E |
| 010 = B | 110 = F |
| 011 = C | 111 = G |

Default GID = "A"

| Baud Rate |
|---|
| 00 = 300 |
| 01 = 1200 |
| **10 = 9600** |
| 11 = 19200 |

| Hardware Handshake |
|---|
| **00 = Handshake OFF, non-modem connection** |
| 01 = FULL Duplex modem connection |
| 10 = HALF Duplex modem connection |
| 11 = Handshake ON, non-modem connection |

Default No Activity timeout: 10 minutes

**Data Link Default Configuration Switches**

1 Protocol can also be overridden by CONTROL operations, but the other parameters established by default switches must be replaced by CONTROL operations in order to ensure proper configuration.

Before you set up the default switches, determine the proper operating parameters for your application, then set the parity, hardware handshake, and baud rate switches as indicated in the figure. Be sure that all switches are fully seated in their proper positions to ensure reliable operation.

# Interface Installation

After the configuration switches have been set, you are ready to install the interface in the computer. Most computers that use this interface have one or more I/O backplane cover plates that protect the accessory/backplane enclosure. To install the interface, remove the appropriate cover and carefully slide the interface into the selected slot, usually the one below the centerline of the cover plate retainer nuts in the computer or expander frame. Seat the interface into the backplane connector, then tighten the two thumbscrews to hold the interface in place. Do not overtighten. The interface is now ready to be connected to an interconnecting cable or adapter between the interface and whatever data communication equipment you are using in your application.

# Chapter 3
# Interface Cables

Before the datacomm interface can interact with a remote computer or other device, it must be connected to the data communications link. This can be a simple direct connection to a host computer nearby, or it can be to a modem or other device that uses a more sophisticated connection such as a switched telephone network connection or satellite microwave link. The type of connection determines what type of cable is needed for a given application. This chapter explains how to connect cables for various applications, and includes schematic diagrams of the cable options available for the datacomm interface.

## RS-232C Connections

There are two types of cables available for RS-232C applications. Both are equipped with 25-pin EIA connectors designed to mate with connectors on other RS-232C devices or equipment.

- The Option 001 (DTE) cable has a male connector, and is designed for connecting the interface to an RS-232C-compatible modem or other data communications equipment. The DTE designation means the cable is designed to be used as a Data Terminal Equipment (DTE) interconnect to Data Communications Equipment (DCE).
- The Option 002 (DCE) cable has a female connector and is internally cross-wired so that the datacomm interface acts like DCE, such as a modem. Thus, by using two cables, one of each type, two computers can be connected directly to each other, back-to-back, without using modems or other devices between the two.

### Optional Drivers and Receivers

Two optional drivers and receivers are used with the RS-232C cable options[1]. Their functions are as follows:

| Drivers | |
|---|---|
| **Name** | **Function** |
| OCD1 | Data Rate Select |
| OCD2 | Secondary Request to Send |
| OCD3 | Not used |
| OCD4 | Not used |

| Receivers | |
|---|---|
| **Name** | **Function** |
| OCR1 | Ring Indicator |
| OCR2 | Secondary Data Carrier Detect |


OCD2 is used for auto-dial pulsing in the HP 13265A Modem. None of the optional drivers and receivers are used for Data Link and Current Loop adapters.

1 These driver and receiver assignments are for the HP 98628 Datacomm Interface, and may not apply to the HP 98691 Programmable Datacomm Interface. Refer to documentation from the firmware supplier for that information.

## Option 001 DTE (Male) Cable

The male DTE cable (5061-4215) is compatible with most RS-232C modems. It is designed so that you can connect a modem directly to the datacomm interface without using an intermediate adapter.

The following cable schematic shows which drivers and receivers are connected to respective pins in the male RS-232C connector. It also includes the test connector schematic showing the loop-back signal paths used for testing the interface and cable.

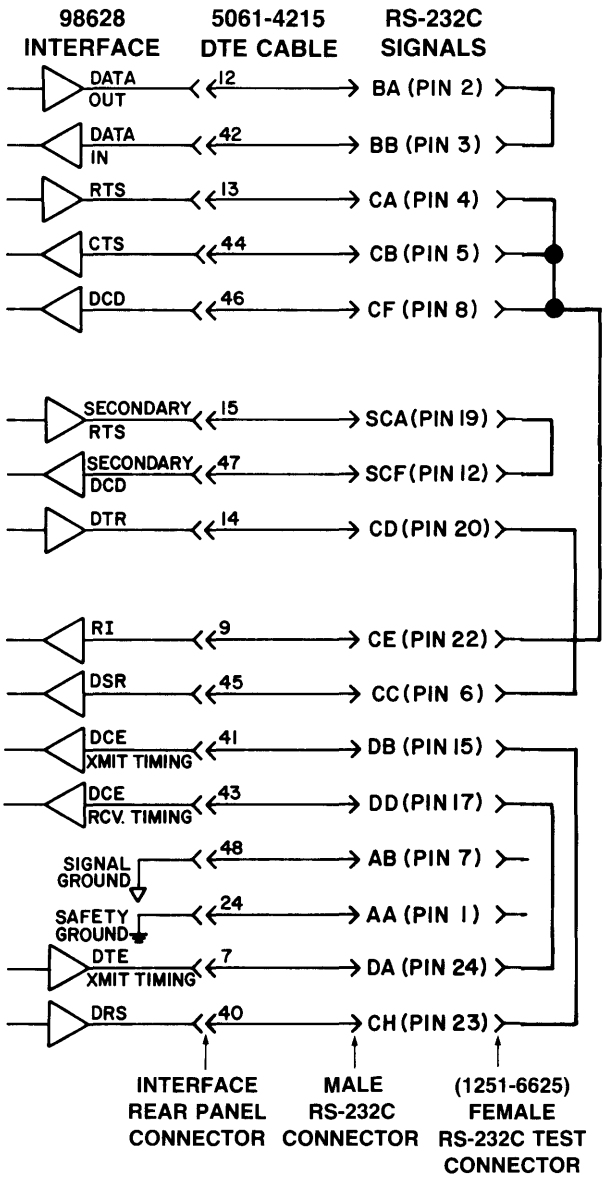



Option 001 DTE Interface Cable and Test Connector

## Option 002 DCE (Female) Cable

The female DCE cable (5061-4216) is compatible with the Option 001 male DTE cable for all back-to-back connections between desktop computers equipped with HP 98628A datacomm interfaces. The DCE cable can also be used successfully with most male DTE RS-232C cable connectors designed for driving modems.


The following diagram shows the driver and receiver connections to the female RS-232C connector, and includes the test connector loop-back wiring:

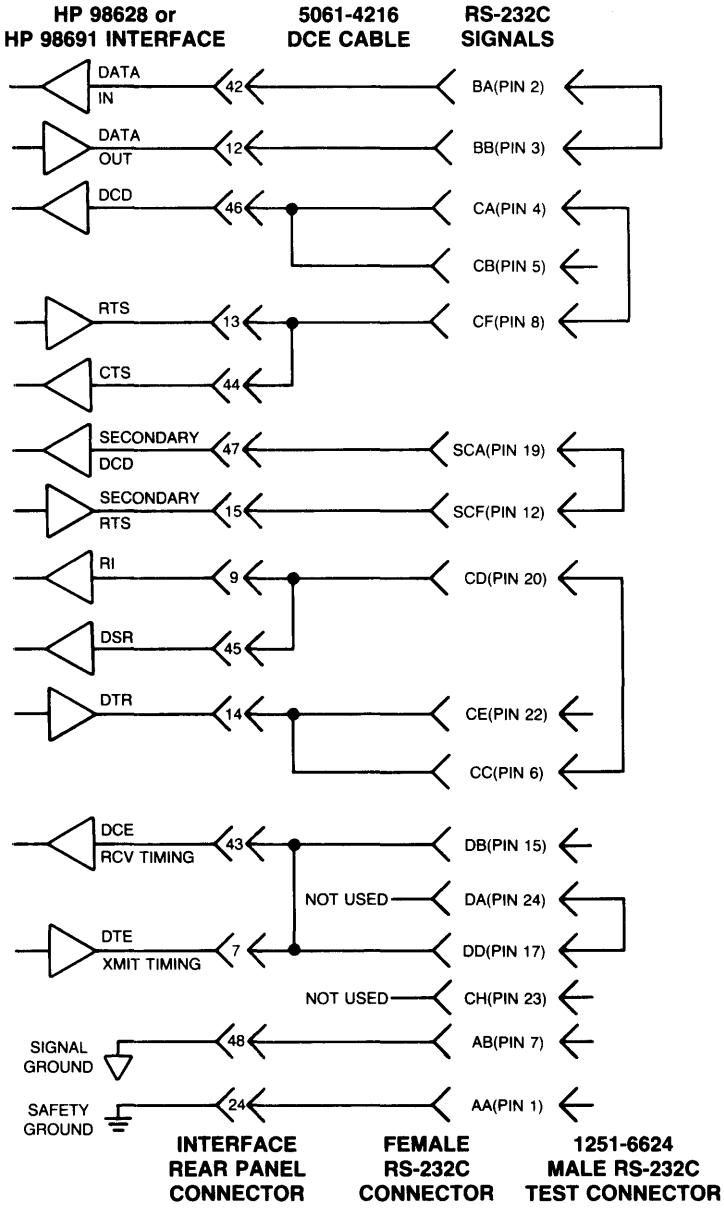


**Option 002 DCE Interface Cable and Test Connector**

## Connecting Two Desktop Computers

The HP 98628 Datacomm Interface can be used in a back-to-back configuration to connect two desktop computers to each other. To ensure proper signal flow, connect the two datacomm interfaces to each other by using an Option 001 (DTE) cable on either interface, and an Option 002 (DCE) cable on the other. The DCE cable includes some internal cross-wiring to connect interface signals so that they simulate normal modem (DCE) operation. The following schematic diagram shows the interconnection between interfaces through the two cables, and includes all connector pin numbers.

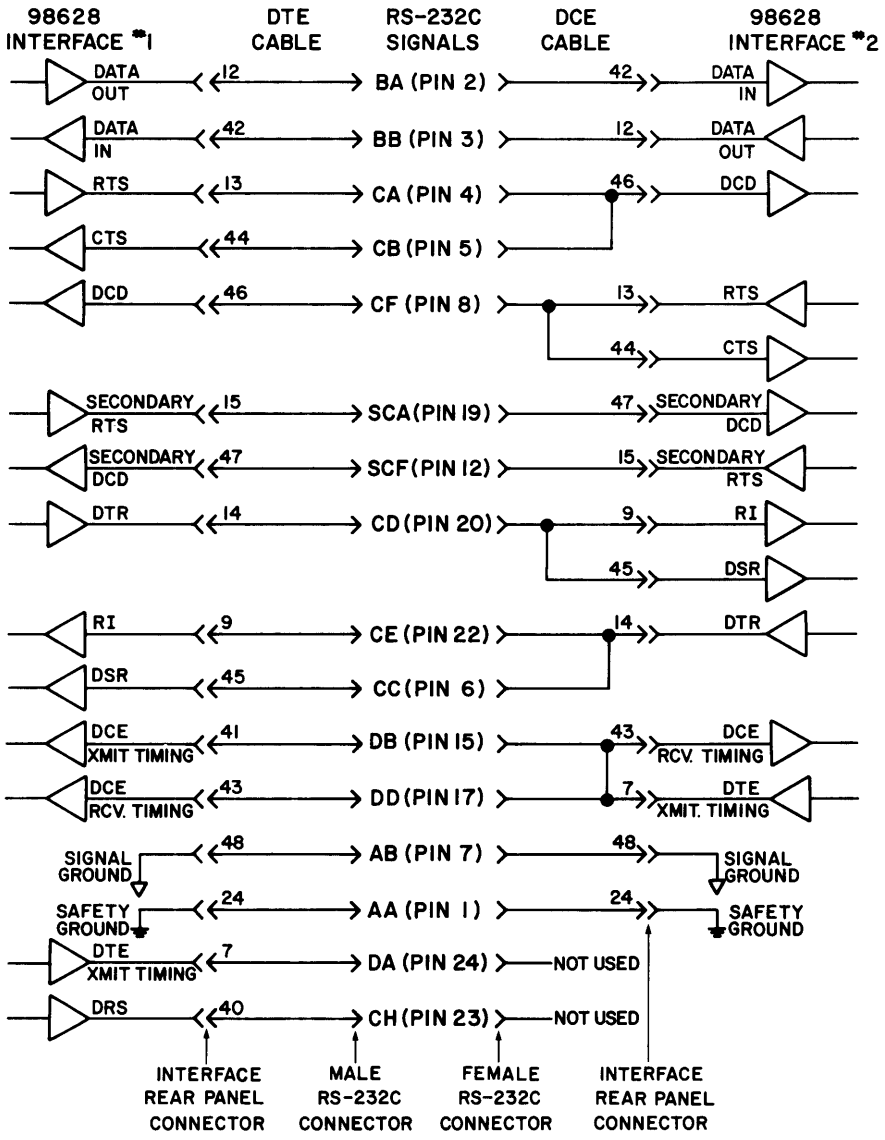


DTE/DCE Interface Cable Wiring

## Using DCE Cables to Connect to DTE Devices

Sometimes, you may want to connect the datacomm interface to an RS-232C printer or other peripheral that has a female DTE connector on its rear panel. The obvious question then is which cable option should you use? In truth, neither will work, because:

- The DCE cable that would normally be used to interconnect to DTE devices has a female connector, thus requiring an adapter, and
- The male DTE cable is not pin-compatible because each signal line connects two drivers or two receivers, causing conflicts between drivers and no signal source for the receivers.

To connect the datacomm interface to an RS-232C peripheral, use an adapter cable that is suited to your needs. Several stock cables are available from HP, or you can wire your own, depending on the situation. Factors that affect cable selection include:

- Does the peripheral provide all the required handshake inputs for the interface?
- Does the peripheral have receivers that can produce the needed response to the driver signals originating from the interface?
- What signals must be cross-wired to maintain the proper states for the various handshake lines such as DSR, CTS, and RI?

For more information about what stock adapter cables are available for your needs, contact your nearest HP Sales and Service office.

# RS-449 Connections


There are two types of RS-449 Interface configurations:

- RS-422 Balanced-line interconnection, and
- RS-423 Unbalanced-line interconnection.

Cable options for RS-449/422 are not available from HP at the present time.

## Option 003 RS-423 Unbalanced DTE Cable

The HP 98628A Option 003 interface includes an interface cable (5061-4250) that is compatible with RS-449/423 unbalanced applications. The interface cable connector is a male DTE connector designed to mate with a female DCE connector. The following diagram shows the wiring configuration of the RS-423 cable and connectors including interconnection to drivers, receivers, and grounds, as well as test connector loop-back wiring.

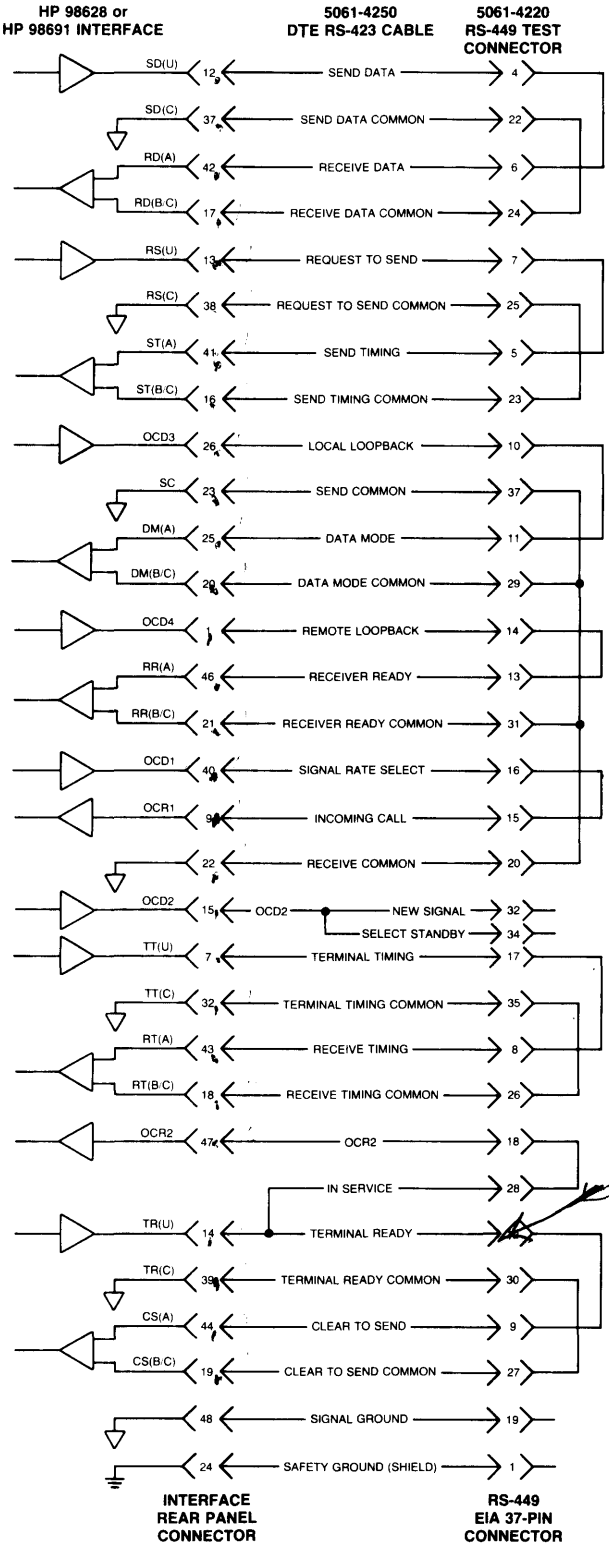


**RS-423 Unbalanced-line Interface Cable**

# Test Connectors

Test connectors are furnished with cable options to the datacomm interface. Interfaces shipped without cables do not include a test connector.

## RS-232C DTE Cable Test Connector

A female 25-pin test connector (1251-6625) is shipped with the male DTE cable. The connector has several pairs of pins shorted to each other to provide signal loop-back. The following table shows how the connector is wired, and includes the identification of the signal lines that are tied together:

**RS-232C DTE Test Connector Loop-back Wiring**

| Signal Source Name | RS-232C ID | Pin # | Pin # | RS-232C ID | Signal Destination Name |
|---|---|---|---|---|---|
| Transmit Data | BA | 2 | 3 | BB | Receive Data |
| Request to Send | CA | 4 | 5,8,22 | CB/CF/CE | Clear to Send/ Data Carrier Detect/ Ring Indicator (OCR1) |
| Data Terminal Ready | CD | 20 | 6 | CC | Data Set Ready |
| Secondary RTS | SCA | 19 | 12 | SCF | Secondary DCD (OCR2) |
| (not used) | | 14 | 25 | | (not used) |
| Data Rate Select (OCD1) | CH | 23 | 15 | DB | DCE Transmit Timing |
| Terminal Xmit Timing | DA | 24 | 17 | DD | DCE Receive Timing |

## RS-232C DCE Cable Test Connector

A test connector (1251-6624) is also provided with the datacomm interface DCE cable option. This connector is similar to the DTE test connector, except that it is male instead of female, and two jumpers have been omitted. The following table shows the loop-back wiring connections:

**RS-232C DCE Cable Test Connector Loop-back Wiring**

| Signal Source Name | RS-232C ID | Pin # | Pin # | RS-232C ID | Signal Destination Name |
|---|---|---|---|---|---|
| Transmit Data | BA | 2 | 3 | BB | Receive Data |
| Request to Send | CA | 4 | 8 | CF | Data Carrier Detect |
| Data Terminal Ready | CD | 20 | 6 | CC | Data Set Ready |
| Secondary RTS | SCA | 19 | 12 | SCF | Secondary DCD (OCR2) |
| Terminal Xmit Timing | DA | 24 | 17 | DD | DCE Receive Timing |

## RS-449 Cable Test Connector

A female 37-pin test connector (5061-4220) is shipped with the RS-449/423 (Option 003) cable. Like its RS-232C counterparts, the connector has several pairs of pins shorted to each other to provide signal loop-back. The following table shows connector wiring and signal identification:

**RS-449 Test Connector Loop-back Wiring**

| Signal Source Name | RS-232C ID | Pin # | Pin # | RS-232C ID | Signal Destination Name |
|---|---|---|---|---|---|
| Send Data (unbal) | SD(u) | 4 | 6 | RD(A) | Receive Data |
| Send Data Common | SD(C) | 22 | 24 | RD(B/C) | Receive Data Common |
| Request to Send (unbal) | RS(u) | 7 | 5 | ST(A) | Send Timing |
| Request To Send Common | RS(C) | 25 | 23 | ST(B/C) | Send Timing Common |
| Local Loopback | OCD3 | 10 | 11 | DM(A) | Data Mode |
| Send Common | SC | 37 | 29 | DM(B/C) | Data Mode Common, |
| | | | 20 | RC | Receive Common, |
| | | | 31 | RR(B/C) | Receiver Ready Common |
| Remote Loopback | OCD4 | 14 | 13 | RR(A) | Receiver Ready |
| Signal Rate Select | OCD1 | 16 | 15 | OCR1 | Incoming Call |
| Terminal Timing (unbal) | TT(u) | 17 | 8 | RT(A) | Receive Timing |
| Terminal Timing Common | TT(C) | 35 | 26 | RT(B/C) | Receive Timing Common |
| Terminal Ready (unbal) | TR(u) | 12 | 9 | CS(A) | Clear to Send |
| Terminal Ready Common | TR(C) | 30 | 27 | CS(B/C) | Clear to Send Common |
| Terminal Ready (unbal) | TR(u) | 28 | 18 | OCR2 | Test Mode |

# Building Custom Cables

Occasional situations may require use of non-standard cables. If you need to modify an existing cable or design a new one, several precautions are necessary to ensure optimum performance. This section provides information for determining wiring needs and suggests several helpful assembly techniques that can produce better noise immunity and better system performance.

## Safety Considerations

Electrical equipment safety grounds must be adequately maintained when designing cables. Generally, a shielded multi-conductor cable is used for datacomm applications. The outer shield is wired to the earth (safety) ground pin on the interface connector. The shield should also be continued with a connection through the cable terminating connector to the safety (earth or frame) ground of the device being connected. Grounding the shield at both ends provides a path for electrostatic discharge currents, and helps maintain both frames at the same potential, thus improving noise immunity. Be sure, however, that there are no ground voltage differentials between power receptacles for devices connected to the same cable shield. This is best ensured by feeding power to both the computer and modem or other device from the same circuit breaker panel, or by taking other equivalent precautions.

For other than short cable runs, to ensure safe ground currents through the shield, install the cable so that it is connected to the datacomm interface after the interface is installed in the computer and the computer power has been connected. If the modem and computer are connected to a different building grounds: before you connect the cable to the modem, use an AC/DC digital voltmeter to measure the voltage difference between the shield pin of the cable connector and the shield pin of the corresponding modem (or other device) connector. If the voltage is more than 100 to 300 millivolts, alternate grounding should be installed to reduce or eliminate the difference. After grounding is complete and cables are connected, use a current-sense probe to measure cable shield currents. Shield currents at power frequency or below should never be allowed to exceed a few hundred milliamperes under normal operating conditions.

## Using Interface Power Connections

The datacomm interface provides pins for +5V, +12V, and −12V power at its rear panel connector. These connections are normally used with various modems or adapters supplied by HP, and are not intended for other purposes. Improper use of these power connections can seriously compromise the reliability of the computer.

## Balanced Versus Unbalanced Connections

Note that the interface is designed for both balanced (RS-449/422) and unbalanced (RS-449/423 and RS-232C) operation. This requires a dual set of drivers for certain outputs as well as receivers that support both balanced and unbalanced inputs. All connections to the interface cable or adapter are made through the 50-pin connector on the interface rear panel cover. Connections are shown on the schematic diagram, and a suffix on each line identifier indicates whether the input or output is for balanced or unbalanced operation as follows:

- TT(u), SD(u), TR(u), and RS(u) are all unbalanced driver outputs whose return paths to ground are to TT(C), SD(C), TR(C) and RS(C), respectively.
- Balanced drivers for TT, SD, TR, and RS have their complementary outputs labelled as: (A) for inverted output; (B) for non-inverted output.

- Receiver inputs ST, RT, RD, and CS that are labelled (A) are connected to the (A) output of the associated balanced driver or the output from the unbalanced driver for that line. The (B/C) input is connected to the balanced driver (B) output, or to the (C) return ground path for unbalanced drivers. Be careful to maintain proper signal sense through the interface cables to ensure correct logic sense in received data bits.
- All other drivers and receivers are unbalanced lines with ground returns handled through the SC (signal common) and SG (signal ground) lines. The cable shield should not be connected to the same connector pin(s) as the common/ground signal return lines.
- Balanced-line interface cables used in RS-422 applications must be properly terminated to minimize or eliminate transmission-line reflections due to impedance mismatch. This is usually accomplished by adding a load resistor (approximately 100Ω) across each balanced receiver input. The impedance of the receiver input(s) and associated circuitry should be considered when determining the proper load resistance to be used.

The following table shows datacomm rear panel pinouts for both balanced and unbalanced RS-232C and RS-449 applications.

**Datacomm Interface Connector Pin Assignments**

| Function | Interface Pin No | Interface Pin No | Function |
|---|---|---|---|
| Optional Driver OCD4 | 1 | 26 | Optional Driver OCD3 |
| Send Data (SD) bal (B) | 2 | 27 | Send Data (SD) bal (A) |
| Req to Send (RS) bal (B) | 3 | 28 | Req to Send (RS) bal (A) |
| Terminal Ready (TR) bal (B) | 4 | 29 | Terminal Ready (TR) bal (A) |
| Not used | 5 | 30 | Not used |
| Not used | 6 | 31 | Not used |
| Xmit Timing (TT) unbal | 7 | 32 | Xmit Timing (TT) unbal return |
| Xmit Timing (TT) bal (B) | 8 | 33 | Xmit Timing (TT) bal (A) |
| Ring Indicator (OCR1) | 9 | 34 | |
| Modem/Adapter Power: +12V | 10 | 35 | Modem/Adapter Power: +5V |
| Modem/Adapter Power: −12V | 11 | 36 | Connected to pin 35 |
| Send Data (SD) unbal | 12 | 37 | Send Data (SD) unbal return |
| Request to Send (RS) unbal | 13 | 38 | Req to Send (RS) unbal return |
| Terminal Ready (TR) unbal | 14 | 39 | Term Ready (TR) unbal return |
| Secondary RS (OCD2) | 15 | 40 | Data Rate Select (OCD1) |
| Send Timing (ST) input (B/C) | 16 | 41 | Send Timing (ST) input (A) |
| Receive Data (RD) input (B/C) | 17 | 42 | Receive Data (RD) input (A) |
| Rcv Timing (RT) input (B/C) | 18 | 43 | Receive Timing (RT) input (A) |
| Clear to Send (CS) input (B/C) | 19 | 44 | Clear to Send (CS) input (A) |
| DM (RS-449)/DSR (RS-232) (B/C) | 20 | 45 | RS-232C Data Set Ready |
| Rcvr Ready (Data Carrier Detect) RR input (B/C) | 21 | 46 | Rcvr Ready (Data Carrier Detect) RR input (A) |
| Receive Common (RC) | 22 | 47 | Secondary DCD (OCR2) |
| Send Common (SC) | 23 | 48 | Signal Ground |
| Earth (Safety) Ground (Shield) | 24 | 49 | Not used |
| Data Mode (DM) input (A) RS-449 | 25 | 50 | Not used |

Unbalanced returns for TT (pin 32), SD, RS, and TR (pins 37, 38, and 39) are connected to logic ground, as are SC (pin 23) and SG (pin 48).

Power supplied from pins 10, 11, 35, and 36 is normally used for modems and adapters supplied by HP, and is not intended for other purposes. Improper use of these pins can seriously compromise the reliability of the computer that powers the interface.

# Comparison of Datacomm Standards

There are three dominant datacomm standards, RS-232, RS-449, and CCITT V.24 which is used mainly in Europe. Each uses mnemonics or numbers to identify various signal lines and grounds. The following table is provided for your convenience in interpreting standards and relating them to the datacomm interface. Not all functions are supported by the interface.

**Electrical Standards Comparison Table**


| | RS-449 | | RS-232C | | CCITT V.24 |
|---|---|---|---|---|---|
| SG | Signal Ground | AB | Signal Ground | 102 | Signal Ground |
| SC | Send Common | | (not assigned) | 102a | DTE Common |
| RC | Receive Common | | (not assigned) | 102b | DCE Common |
| IS | Term. in Service | | (not assigned) | | (not assigned) |
| IC | Incoming Call | CE | Ring Indicator | 125 | Calling Indicator |
| TR | Terminal Ready | CD | Data Terminal Ready | 108/2 | Data Terminal Ready |
| DM | Data Mode | CC | Data Set Ready | 107 | Data Set Ready |
| SD | Send Data | BA | Transmitted Data | 103 | Transmitted Data |
| RD | Receive Data | BB | Received Data | | Received Data |
| TT | Terminal Timing | DA | Tx Timing (DTE) | 113 | Tx Timing (DTE) |
| ST | Send Timing | DB | Tx Timing (DCE) | 114 | Tx Timing (DCE) |
| RT | Receive Timing | DD | Receiver Timing | 115 | Rec Timing (DCE) |
| RS | Request to Send | CA | Request to Send | 105 | Request to Send |
| CS | Clear to Send | CB | Clear to Send | 108 | Ready for Sending |
| RR | Receiver Ready | CF | Data Carrier Detect | 109 | Received Line Signal Detect |
| SQ | Signal Quality | CG | Signal Quality Detector | 110 | Data Signal Quality Detector |
| NS | New Signal | | (not assigned) | | (not assigned) |
| SF | Select Frequency | | (not assigned) | 126 | Select Tx Frequency |
| SR | Signalling Rate Selector | CH | Data Signal Rate Selector (DTE) | 111 | Data Signalling Rate Selector (DTE) |
| SI | Signal Rate Indicator | CI | Data Signal Rate Selector (DCE) | 112 | Data Signalling Rate Selector (DCE) |
| SSD | Secondary Send Data | SBA | Secondary Transmitted Data | 118 | Transmitted Backward Channel Data |
| SRD | Secondary Receive Data | SBB | Secondary Received Data | 119 | Received Backward Channel Data |
| SRS | Secondary Request to Send | SCA | Secondary Request to Send | 120 | Transmit Back Channel Line Signal |
| SCS | Secondary Clear to Send | SCB | Secondary Clear to Send | 121 | Backward Channel Ready |
| SRR | Secondary Receiver Ready | SCF | Secondary Data Carrier Detect | 122 | Backward Channel Receiver Line Signal Detect |
| LL | Local Loopback | | (not assigned) | 141 | Local Loopback |
| RL | Remote Loopback | | (not assigned) | 140 | Remote Loopback |
| TM | Test Mode | | (not assigned) | 142 | Test Indicator |
| SS | Select Standby | | (not assigned) | 116 | Select Standby |
| SB | Standby Indicator | | (not assigned) | 117 | Standby Indicator |

# Chapter 4
# Service Information

This chapter contains a summary of interface theory of operation and other information needed to service the datacomm interface at component level. Troubleshooting and repair should be done by expert technicians who are familiar with Z-80A microprocessor circuit operation, and who have access to Z-80A documentation when needed. Detailed interface theory is not provided. This interface is normally serviced on an exchange/replacement basis due to its complexity. Service at the component level should be attempted only when adequate test equipment is available.

## Theory of Operation

The following block diagram shows the functional blocks that comprise the interface.

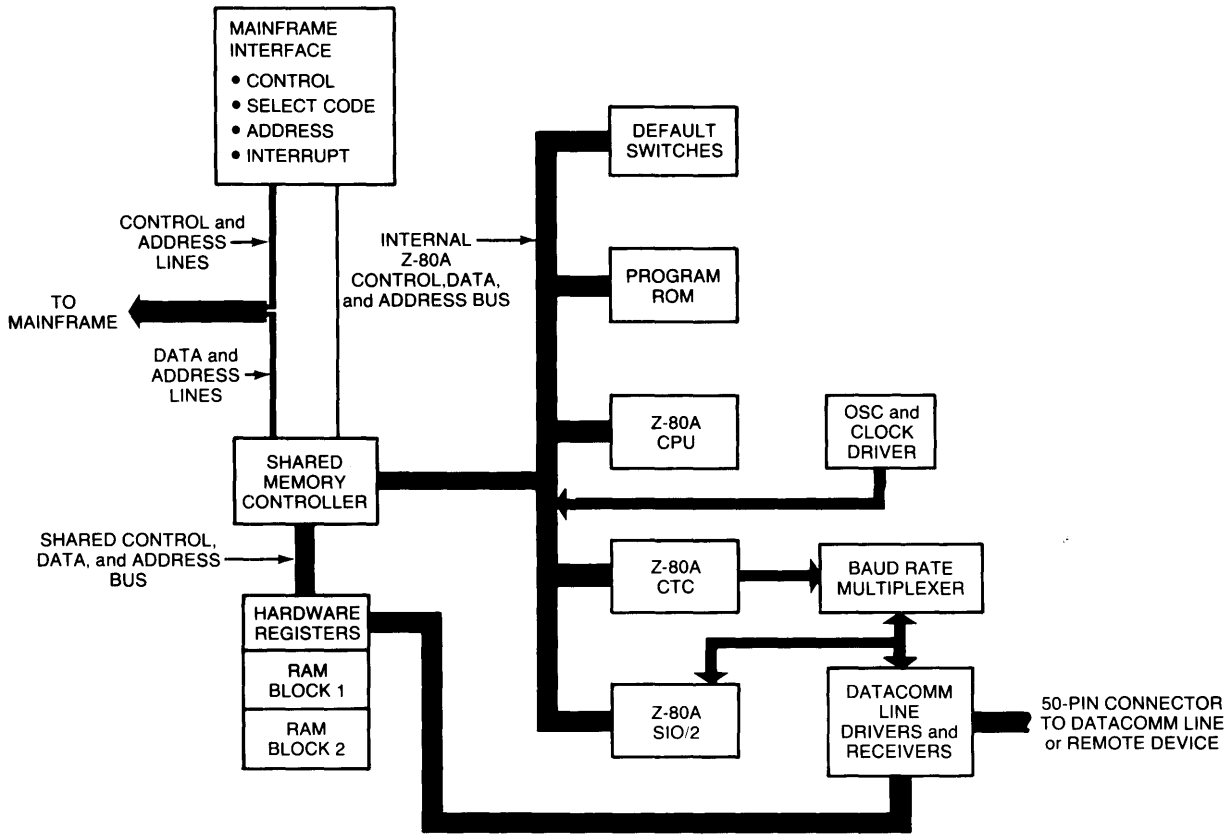


**Datacomm Interface Block Diagram**

The interface communicates with the computer mainframe through interface circuitry that is treated like memory addresses by the mainframe. Information is exchanged between the interface and computer through shared RAM memory and hardware registers. Access to shared memory and hardware registers is obtained through the shared memory controller. Data is transferred on the shared data bus. Interaction between the interface and computer mainframe is managed by interrupt circuitry and the address comparator connected to the upper bits of the mainframe memory address bus.

The interface program ROM usually contains operating firmware for the Z-80A interface CPU which executes the protocol-dependent programs stored in the ROM. Shared memory is used to exchange information between the interface CPU and the mainframe computer. The interface CPU controls the SIO and CTC chips which perform datacomm serial I/O operations (SIO) and counter and timing functions (CTC). It also performs and controls various other interface functions on command from the mainframe processor.

The modem control register latch and modem status register buffer hold control and status information being exchanged between the modem and interface. Line drivers and receivers convert the internal TTL signals to RS-232C or RS-449 electrical levels for transmission over the datacomm link. Data format and protocol information are created by the interface CPU with help from the CTC and SIO support chips. Default switch information is used by the interface CPU to set up power-up and reset defaults as defined by the firmware in the Program ROM.

## Z-80A System Operation

The Z-80A CPU, SIO, and CTC chips as well as the program ROM and default switches are tied together through the internal Z-80A 16-bit address (ZA) bus and 8-bit data (ZD) bus. These buses belong exclusively to the interface CPU and are not accessible by the mainframe computer.

Shared RAM and registers are accessed through the shared data (SD) and shared address (SA) buses. Access to the shared buses is controlled by the shared memory controller. In general, bus access is granted to the first processor that requests the bus. If the shared memory controller grants access to one processor and the other processor requests access during the memory cycle, the controller holds the second processor off until the memory cycle is complete, after which shared memory access is granted to the second processor. If a simultaneous-request conflict occurs, bus access defaults to the mainframe. Only 15 bits of address bus and 8 bits of data bus are gated to the shared buses from the mainframe. The remaining mainframe address bus bits are gated to the address comparator to establish select code identification. The address comparator bits combine with the shared address bus bits to establish the range of mainframe memory addresses that pertain to a particular interface. Upper-byte mainframe data bus bits (8 thru 15) are not used by the interface.

## Select Code Recognition

The Address Decoder (U43) decodes mainframe upper memory address bits to detect card accesses. The BAS input from the mainframe gates the comparator inputs to ensure that the address is stable. When the address is recognized, the P = Q output is activated causing the IMA (I'm Addressed) output to return acknowledgement to the mainframe. The DTACK (Data Acknowledge) output is also enabled, and is activated later by the Shared Memory Controller.

BLDS (Buffered Lower Data Strobe, and MYPA (My Peripheral Address) are ANDed with the Request Enable flip-flop (U23 Pin 4) to produce the mainframe shared memory request signal, one of the inputs to the Shared Memory Controller. The Request Enable flip-flop ensures that the Shared Memory Controller has completed any memory cycles in process before granting access for a new one, since the mainframe and interface processors are not synchronized with each other.

## Interrupt System

The mainframe driver enables or disables interface interrupts by sending control sequences to the shared data bus that set or clear the Interrupt Enable flip-flop (U14 pin 5) through a hardware register access.

When the interface card determines that service from the mainframe is required, the interrupt condition is sent to a register in shared memory. The memory write cycle automatically resets the Interrupt Request flip-flop (U23 pins 9 and 10: pin 9 goes low on reset). If interrupts are enabled (Interrupt Enable Q output is low), and service is requested (Interrupt Request Q output is low), the Interrupt Demultiplexer (U34) is enabled. When the enable signal is received by the Interrupt Demultiplexer, the interrupt level switches are decoded (SW2 pins 6 and 7), which activates one of the interrupt request lines (IR3 thru IR6).

Interrupt requests are cleared by the mainframe when it reads the Interrupt Cause register in shared memory. The interrupt request is removed when the Interrupt Register Decoder (U22) activates one of the Set inputs on the Interrupt Request flip-flop.

## Interface Reset

During power-up, the computer mainframe pulls the RESET input on all interface cards low. This causes the datacomm interface to reset the Z-80A CPU by activating its reset input for the duration of the pulse, and clears the Reset flip-flop (U15 pin 9). When the Reset flip-flop Q output goes low, it resets or presets other flip-flops that must be initialized to a known state. The Z-80A CPU then disables the Reset flip-flop during execution of its reset routines. A shared hardware register access is used to terminate the hardware reset.

When a control register operation is used to reset the card, the control sequence is handled through the shared memory controller which sends the reset command to the Reset flip-flop. The flip-flop then:

- Disables mainframe interrupts by setting the Interrupt Enable flip-flop.
- Disables mainframe interrupt requests by setting the Interrupt Request flip-flop.
- Clears the hardware Semaphore flip-flop (semaphore busy).
- Initializes the CTC and SIO Z-80A support chips by activating their Reset inputs.
- Disables Modem Control Latch (U3) outputs to ensure that the Terminal Ready and Request-to-Send lines are inactive until initialized by the processor.
- Initializes the baud rate clock dividers (U13) to ensure proper timing synchronization.
- Interrupts the Z-80A CPU through its non-maskable interrupt (NMI) line. Note that during power-up when RESET is active, the RESET input is recognized by the Z-80A, and the NMI input is ignored.

## Shared Memory Controller

### Addressing

Communication between the card and mainframe is handled through a set of memory addresses, some of which are handled as registers. Only alternate addresses from the mainframe are used because the least-significant bit is not connected (shared address bit 0 is connected to mainframe address bit 1, etc.). The upper 2 bits of the shared address bus (shared address bits 13 and 14, mainframe address bits 14 and 15) determine the data destination (write) or source (read) as follows:

| SA14 | SA13 | Source/Destination |
|---|---|---|
| 0 | 0 | Hardware Registers |
| 0 | 1 | RAM Lower Block (U25) |
| 1 | 0 | RAM Upper Block (U26) |
| 1 | 1 | Not used |

Shared Memory addressing is accessed through a set of dual-input multiplexer/latch circuits (U39-42). The Access Select flip-flop (U19 pin 9) selects the memory address from the mainframe or interface CPU, then latches the address (U16 pin 3) to maintain proper signals during the memory cycle.

### Read/Write Control

The mainframe read/write control line is buffered through the same multiplexer/latch circuits that handle memory addresses. U39 pin 15 carries mainframe read/write control (U39 pin 2) during mainframe memory accesses, and is held inactive during Z-80A accesses (U39 pin 3). The latched mainframe read/write signal controls the direction of the 8-bit bus transceiver (only the lower 8 bits of the 16-bit bus are used), and drives the 2B (read/write) input of the memory control multiplexer (U32).

The Z-80A read/write control line (ZRD) controls the direction of the shared data bus transceiver (U45), and drives the 2A (read/write) input of the memory control multiplexer (U32 pin 5). The Access Select flip-flop determines which input (2A or 2B) is used to drive the shared read (SRD) output which, when gated with shared memory timing clocks from U17, controls the RAM write enable (SWR) line.

### Clock Circuits

The 7.3728 MHz oscillator drives a pair of flip-flop frequency dividers (U19 pins 1-6 and U15 pins 1-6) to generate symmetrical timing pulses at 1/2 and 1/4 the clock frequency, respectively. The 3.6864 MHz System Clock output (TP5) is also used to drive the Z-80A clock input after being waveshaped by Q1, Q2, and their associated circuitry. The output of the second divider (U15 pin 6) produces a 1.8432 MHz frequency reference for the CTC chip which generates baud rate timing signals for the SIO chip. CTC timing signals are fed to the SIO chip through the baud rate multiplexer (U11).

**Memory Access Select Timing**


At the beginning of a processor memory cycle, the interface or mainframe CPU sends a memory request. The Z-80A outputs: A15, MREQ, and RFSH are combined (U24 pin 1) to drive the 1A input of the memory control multiplexer (U32). The mainframe BLDS output is combined with MYPA (TP6), then gated with shared memory timing (U17 pin 6 through U23 to U4 pin 11) to drive the 1B input of the memory control multiplexer (32). The same line is also connected to the D input of the Access Control flip-flop which selects the mainframe or interface processor when its clock line goes high.

The Access Control flip-flop is clocked when the oscillator and system clock (TP5) are both low (U24 pin 13 goes high). (Note that U16 pin 4 and U17 pin 6 are both low indicating that no memory cycle is in progress.) The state of the Access Select flip-flop's D input at clock time determines which processor gets control of the shared memory cycle. If D is low, the mainframe processor is connected; if D is high, access defaults to the Z-80A interface processor. When the System Clock (TP5) input to the timing chain goes high, the 1A or 1B input to the memory control multiplexer (U32) is selected by the Access Control flip-flop, inverted by the multiplexer, then used to start a memory cycle when the timing chain flip-flops (U17 pin 2) are clocked on the falling edge of the system clock (TP5).

**Memory Cycle Timing**

If no memory cycle is in progress, the shared memory access request lines from both processors are sampled on alternate falling edges of the 7.37 MHz clock when TP5 is LOW. If a memory cycle is in progress, request sampling is held off until the cycle is complete. The two memory cycle timing chain flip-flops (U17) control memory cycle timing.

Here is an explanation of a typical memory access cycle. The following timing diagram shows the relationship of the clock oscillator (U18) and the System Clock (TP5):

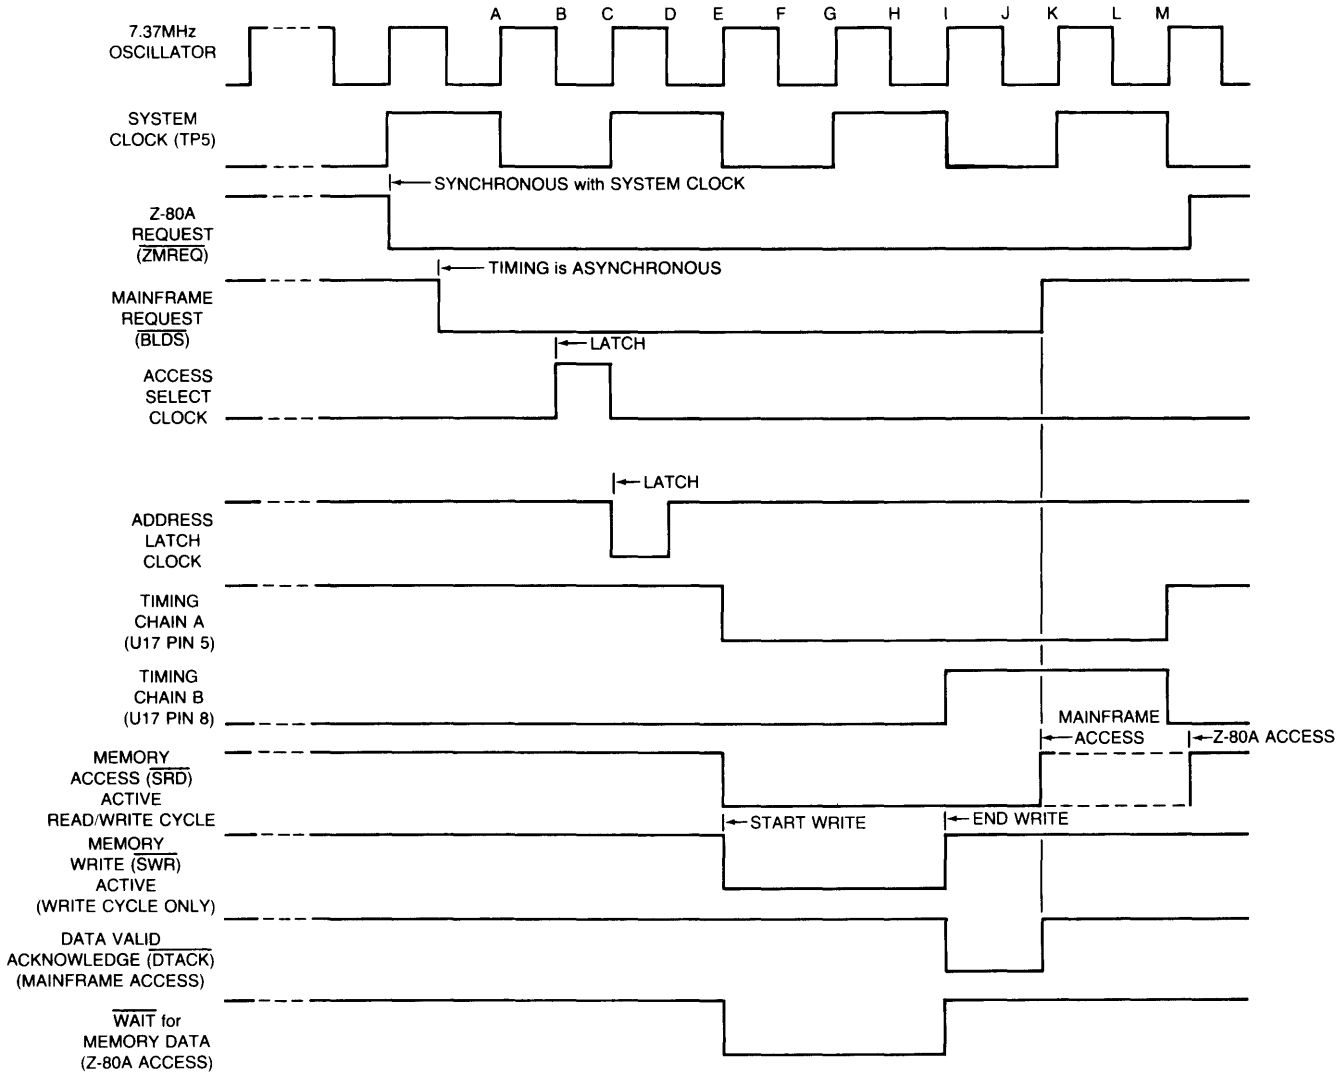


**Memory Cycle Timing Diagram**

Assume that all previous memory cycles have run to completion. The Shared Memory Controller samples the incoming memory request lines on alternate falling edges of the clock oscillator when the System Clock at TP5 is LOW. When a shared memory access request is received, it propogates through intermediate gates and the memory control multiplexer (U32) then arrives asynchronously at the D input of the first timing chain flip-flop (U17 pin 2). If the request is from the mainframe, it arrives at the Access Select flip-flop's D input slightly earlier. (If a memory cycle is in progress, the access request from either processor is held off by U23 pins 3 and 14 which are held high by U17 pin 6. Both inputs go low at the end of the memory cycle, enabling any pending requests in order of established priority: mainframe takes precedence in simultaneous requests pending.)

When TP5 is LOW, if a shared memory request is pending prior to the falling edge (B) of the clock oscillator, the Access Select flip-flop is clocked to determine which processor gets control of shared memory. The output of the flip-flop is then sent to the various multiplexers that control signal routing in the memory and hardware register circuitry.

After the multiplexers have had time to settle, the address latches (U39-42) are clocked on the next rising edge (C) of the clock oscillator (TP5 also goes high). The latched address then propogates to the RAMs and hardware register address decoding circuits.

On the next falling edge of the system clock (TP5) which is also the next rising edge of the clock oscillator (E), the shared memory request at the D input of the first timing chain flip-flop is clocked causing the flip-flop to clear. The output change (Q output goes low) immediately disables clocking to the Access Select flip-flop and address multiplexer latches, and releases the Z-80A WAIT line if the Z-80A is selected. The 3Y or 4Y outputs of the memory control multiplexer (U32) are set to enable the appropriate data bus transceiver (U44 or U45), and the shared write control line (SWR) is gated to RAM (U36 pins 4 & 5 both high). This sequence initiates a memory read or write cycle.

The memory access (read or write) is complete on the next falling edge (I) of the system clock (TP5). At this time, the second timing chain flip-flop is clocked, causing pin 8 to go low. This disables the SWR line forcing it high (end of write cycle), and sends a DTACK (data acknowledge) to the mainframe if the mainframe has access to shared memory. The controller then hangs in the same state until the shared memory access request is removed by the processor. When the processor releases the request line, the D input (U17 pin 2) goes high, releasing the data bus transceivers. The timing chain then resets to its idle state. After the next rising clock edge to U17 pin 3, the controller is ready to process a new memory request.

## Hardware Registers

The four read and four write registers that are implemented completely in hardware (RAM is not used) are selected when SA2 thru SA14 are all 0 (U36 pin 8 LOW). The hardware register decoder (U21) combines SA0, SA1, and the shared read line to enable the appropriate register.

Only bit 7 is implemented in write registers 0 and 1. Register 0, interface reset, sets the Reset flip-flop (U15 pins 8 thru 13). Register 1, interrupt enable, sets or clears the Interrupt Enable flip-flop (U14 pins 1 thru 6).

The upper nibble (bits 4 thru 7) of read registers 0 and 1 are implemented by the tri-state multiplexer (U33). SD0 thru SD3 are held high (0) by pullup resistors, except that SD2 is pulled low (1) by U33 pin 3 during reads from register 0 (interface ID). Read register 0 provides the Switch R setting (SW2 pin 8) and card identification to the shared data bus. Read register 1 provides the interrupt level switch settings, state of the interrupt request flip-flop, and the state of the interrupt enable flip-flop.

Register 2 is the modem control and status register. Data written to this register is latched by the modem control latch (U6). Data inputs are taken from the modem status register buffer (U5).

Register 3 controls the hardware semaphore. Data inputs (read register) sample the state of the semaphore flip-flop (U14 pin 8). At the end of the read access, the flip-flop is clocked, causing the output to be set (D input is always 1). A write to this register clears the flip-flop by pulsing the clear line. The semaphore is normally used as hold-off flag to tell the other processor that a resource is in use and is not available until the current operation has been completed. At the end of the operation, the semaphore is cleared to enable access by the other processor. This provides a means to protect the integrity of circular shared data buffers and queues without risk of scrambling buffer and queue pointers and data.

## Shared RAM

The two shared RAM sockets on the interface (U25 and U26) are designed to accept HP-approved 8-bit-wide static RAM chips. The sockets, if present, use 2 K-byte RAMs, but can accept 8 K-byte RAMs when they become available in the future. The sockets (or IC mounting holes) can accept 24 or 28-pin packages, but both must have the same size RAM installed. 24-pin RAM devices must be installed so that pins 1, 2, 27, and 28 are empty. Jumper wires must be properly configured to match the requirements of the RAM devices that are installed. W4 is used for 24-pin 2K x 8 RAMs; W3 is omitted.

RAM address space is divided into two segments: lower and upper blocks. The first two locations of the lower block are also connected to special decoding hardware that control interrupts between the processors that share the memory. One register is used as a command register; the other as an Interrupt Cause register. When commands are sent to the interface Command Register from the mainframe, the command flip-flop is set, causing an interrupt to the interface processor (if it is properly programmed) through the SIO CTSB input. Data placed in the Interrupt Cause register by the interface processor sets the Interrupt Request flip-flop which then interrupts the mainframe processor if interrupts are enabled.

Control and status communication between the mainframe and interface processors are handled thorugh the Interrupt Cause Register, Command Register, and Data Register. Communication sequences are as follows:

Mainframe Command to Interface:

1. Mainframe places new Control register value in Data Register (control operations only) then places Control or Status register number in Command Register. Command Register access sets interrupt request to Z-80A.
2. If Z-80A interrupt is enabled through SIO channel B (CTSB), the Z-80A responds to the interrupt, reads and stores the Data Register, reads and clears the Command Register value to zero, clears the interrupt, then transfers the Data Register value, if any, to the specified destination.
3. If the command is a status request, the status information is retrieved and placed in the Data Register where it is available to the mainframe.

Interface Interrupt to Mainframe:

1. Interrupt conditions are defined through a previous Control command to the interface. When any of those conditions is encountered, the interface processor places the interrupt cause in the Interrupt Cause register and sets the interrupt request flip-flop.
2. The mainframe responds to the interrupt if interrupts are enabled, and reads the Interrupt Cause register. If the register is zero, the interrupt is terminated. Otherwise, the mainframe processes every interrupt cause in the register, then exits the interrupt service process.

## Default Switches

Default switches are normally used to define power-up default operating parameters. They are read, 4 at a time, by selecting which group is to be read through the 4-bit multiplexer (U20). ZA0 selects between upper and lower nibble, and the multiplexer output is enabled when both ZA5 and ZIORQ are both low. Switch functions are defined by interface card firmware.

## Baud Rate Multiplexer

The baud rate multiplexer (U11) is controlled by the modem control latch. It can select from an external clock source through one of the line receivers, or it can select one of the timing outputs from the CTC chip. The selected clock source is then sent to the SIO chip to be used as a timing reference for received and transmitted data. Outputs are permanently enabled by grounding the enable inputs.

## Line Drivers and Receivers

The interface has two types of line drivers: unbalanced and balanced. The unbalanced drivers are compatible with EIA RS-232C (CCITT V.28) and RS 423 (CCITT V.10) electrical interface standards. Driver rise and fall times are determined by the resistor connected to pin 1 of each driver package (U1, U2, U3, and U7). The 1-MΩ resistor on control signal drivers limits the rise time to approximately 100 μs. The data and clock drivers (U3) use a 20-KΩ resistor to reduce the rise time to about 2.2 μs. No-load output voltage should be +5 to 6 volts (ON) or −5 to 6 volts (OFF).


The balanced drivers (U8) implement the EIA RS-422 (CCITT V.11) electrical interface standard. The output levels of these drivers (measured to signal ground) should be between 0 and +5 volts.

The line receivers (U9 and U10) convert incoming RS-232, RS423, and RS422 signals to TTL-compatible levels. For unbalanced (RS-232 and RS423) connections, the non-inverting inputs are connected to signal ground in the cable connector at the interface rear panel. The incoming unbalanced signal lines are connected to the inverting receiver inputs. To ensure that open cable connections are interpreted as OFF, the non-inverting inputs are connected through 6-kΩ resistors to ground, while the inverting inputs are returned through 6-kΩ resistors to −2.37 volts.

RS-422 implementation requires that 100-Ω resistors be installed between inputs on all balanced receivers (CS, RD, and ST inputs) to match the line impedance of the incoming signal cable pairs. The 6-kΩ resistors need not be removed in such cases. Note that HP does not supply RS-422 cables and accessories for this interface.

# Replacement Parts

The following parts list identifies HP part numbers and manufacturers' part numbers for component-level repairs by qualified personnel.

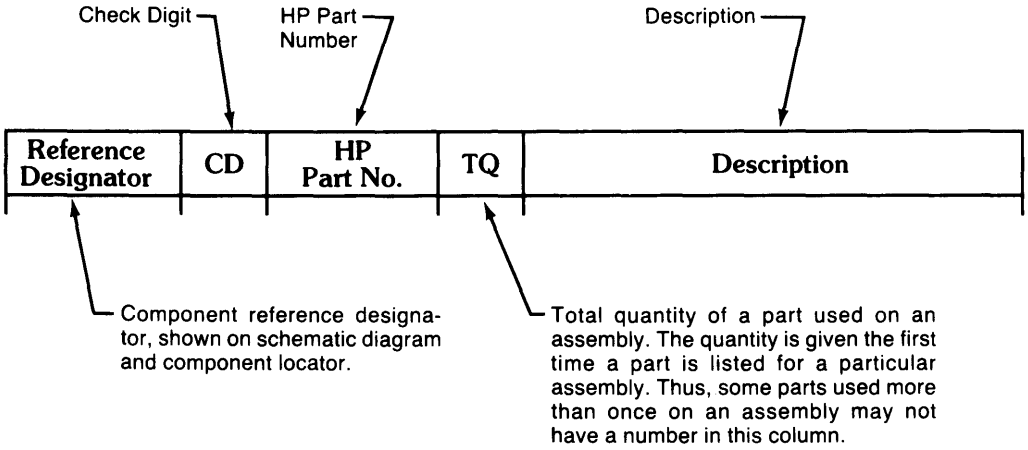


Replacement parts are available from Hewlett-Packard at the following address:

Corporate Parts Center
Hewlett-Packard Company
333 Logue Avenue
Mountain View, California 94042
Telephone: (415) 968-9200

Manufacturer code and part number are listed in the right-hand columns of the parts list. Manufacturers are as follows:


| Mfr. No. | Manufacturer Name | Address | | Zip Code |
|---|---|---|---|---|
| 00000 | Any satisfactory supplier | | | |
| 01121 | Allen-Bradley Co. | Milwaukee | WI | 53204 |
| 01295 | Texas Instr Inc Semicond Cmpnt Div. | Dallas | TX | 75222 |
| 07263 | Fairchild Semiconductor Div. | Mountain View | CA | 94042 |
| 11236 | CTS of Berne Inc. | Berne | IN | 46711 |
| 24546 | Corning Glass Works (Bradford) | Bradford | PA | 16701 |
| 28480 | Hewlett-Packard Co. Corporate Hq | Palo Alto | CA | 94304 |
| 56289 | Sprague Electric Co. | North Adams | MA | 01247 |
| 91506 | Augat Inc. | Attleboro | MA | 02703 |
| S4013 | Hitachi | Tokyo, Japan | | |

Table 4-1. Replaceable Parts

| Reference Designation | HP Part Number | CD | Qty | Description | Mfr Code | Mfr Part Number |
|---|---|---|---|---|---|---|
| | 98628-66503 | 5 | 1 | PC BOARD ASSEMBLY | 28480 | 98628-66503 |
| C1 | 0160-3487 | 9 | 22 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C2 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C3 | 0180-0197 | 8 | 1 | CAPACITOR-FXD 2.2UF +-10% 20VDC TA | 56289 | 150D225X9020A2 |
| C4 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C5 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C6 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C7 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C8 | 0180-1746 | 5 | 1 | CAPACITOR-FXD 15UF +-10% 20VDC TA | 56289 | 150D156X9020B2 |
| C9 | 0180-0393 | 6 | 1 | CAPACITOR-FXD 39UF +-10% 10VDC TA | 56289 | 150D396X9010B2 |
| C10 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C12 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C13 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C14 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C15 | 0160-4807 | 3 | 1 | CAPACITOR-FXD 33PF +-5% 100VDC CER 0+-30 | 28480 | 0160-4807 |
| C16 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C17 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C18 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C19 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C20 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C21 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C22 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C23 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C24 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C25 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C26 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| C27 | 0160-3487 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3487 |
| CR1 | 1901-0025 | 2 | 1 | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| CR2 | 1902-3002 | 3 | 1 | DIODE-ZNR 2.37V 5% DO-7 PD=.4W TC=-.074% | 28480 | 1902-3002 |
| CR3 | 1901-0518 | 8 | 2 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0518 |
| CR4 | 1901-0518 | 8 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0518 |
| F1 | 2110-0297 | 4 | 1 | FUSE .5A 125V NTD .281X.093 | 28480 | 2110-0297 |
| F2 | 2110-0423 | 8 | 1 | FUSE 1.5A 125V NTD .281X.093 | 28480 | 2110-0423 |
| F3 | 2110-0592 | 2 | 1 | FUSE 4A 125V NTD .281X.093 | 28480 | 2110-0592 |
| Q1 | 1854-0019 | 3 | 1 | TRANSISTOR NPN SI TO-18 PD=360MW | 28480 | 1854-0019 |
| Q2 | 1853-0015 | 7 | 1 | TRANSISTOR PNP SI PD=200MW FT=500MHZ | 28480 | 1853-0015 |
| R1 | 0683-1055 | 5 | 3 | RESISTOR 1M 5% .25W CF TC=0-800 | 28480 | 0683-1055 |
| R2 | 0683-1055 | 5 | | RESISTOR 1M 5% .25W CF TC=0-800 | 28480 | 0683-1055 |
| R3 | 0757-0449 | 6 | 1 | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | CT4-1/8-TO-2002-F |
| R4 | 0683-1055 | 5 | | RESISTOR 1M 5% .25W CF TC=0-800 | 28480 | 0683-1055 |
| R5 | 0698-0082 | 7 | 4 | RESISTOR 464 1% .125W F TC=0+-100 | 24546 | CT4-1/8-TO-4640-F |
| R6 | 0757-0405 | 4 | 1 | RESISTOR 162 1% .125W F TC=0+-100 | 24546 | C4-1/8-TO-162R-F |
| R7 | 0698-0082 | 7 | | RESISTOR 464 1% .125W F TC=0+-100 | 24546 | CT4-1/8-TO-4640-F |
| R8 | 0698-0082 | 7 | | RESISTOR 464 1% .125W F TC=0+-100 | 24546 | CT4-1/8-TO-4640-F |
| R9 | 0698-0082 | 7 | | RESISTOR 464 1% .125W F TC=0+-100 | 24546 | CT4-1/8-TO-4640-F |
| R10 | 0757-0346 | 2 | 2 | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-TO-10R0-F |
| R11 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-TO-10R0-F |
| R12 | 0698-0083 | 8 | 2 | RESISTOR 1.96K 1% .125W F TC=0+-100 | 24546 | C4-1/8-TO-1961-F |
| R13 | 0698-0083 | 8 | | RESISTOR 1.96K 1% .125W F TC=0+-100 | 24546 | C4-1/8-TO-1961-F |
| R14 | 1810-0561 | 8 | 1 | NETWORK-RES 16-DIP6.8K OHM X 15 | 28480 | 1810-0561 |
| R15 | 1810-0517 | 4 | 2 | NETWORK-RES 10-SIP6.0K OHM X 9 | 28480 | 1810-0517 |
| R16 | 1810-0517 | 4 | | NETWORK-RES 10-SIP6.0K OHM X 9 | 28480 | 1810-0517 |
| R17 | 1810-0162 | 5 | 1 | NETWORK-RES 14-DIP4.7K OHM X 13 | 11236 | 760-1-R4.7K |
| SW1 | 3101-2510 | 0 | 2 | SWITCH ASSEMBLY-ROCKER | 28480 | 3101-2510 |
| SW2 | 3101-2510 | 0 | | SWITCH ASSEMBLY-ROCKER | 28480 | 3101-2510 |
| U1 | 1820-2117 | 5 | 4 | IC DRVR TTL LINE DRVR DUAL | 07263 | 9636ATC |
| U2 | 1820-2117 | 5 | | IC DRVR TTL LINE DRVR DUAL | 07263 | 9636ATC |
| U3 | 1820-2117 | 5 | | IC DRVR TTL LINE DRVR DUAL | 07263 | 9636ATC |
| U4 | 1820-1201 | 6 | 1 | IC GATE TTL LS AND QUAD 2-INP | 01295 | SN74LS08N |
| U5 | 1820-1491 | 6 | 1 | IC BFR TTL LS NON-INV HEX 1-INP | 01295 | SN74LS367AN |
| U6 | 1820-1997 | 7 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG PRL-IN | 01295 | SN74LS374N |
| U7 | 1820-2117 | 5 | | IC DRVR TTL LINE DRVR DUAL | 07263 | 9636ATC |
| U8 | 1820-2703 | 5 | 1 | IC DRVR TTL DIFF LINE QUAD | 24840 | 1820-2703 |
| U9 | 1820-2594 | 2 | 2 | IC RCVR TTL LS LINE RCVR QUAD 2-INP | 24840 | 1820-2594 |
| U10 | 1820-2594 | 2 | | IC RCVR TTL LS LINE RCVR QUAD 2-INP | 24840 | 1820-2594 |

Table 4-1. Replaceable Parts (continued)

| Reference Designation | HP Part Number | CD | Qty | Description | Mfr Code | Mfr Part Number |
|---|---|---|---|---|---|---|
| U11 | 1820-1244 | 7 | 1 | IC MUXR/DATA-SEL TTL LS 4-TO-1-LINE DUAL | 01295 | SN74LS153N |
| U12 | 1820-2301 | 9 | 1 | IC-Z80A CTC | 28480 | 1820-2301 |
| U13 | 1820-1112 | 8 | 3 | IC FF TTL LS D-TYPE POS-EDGE-TRIG | 01295 | SN74LS74AN |
| U14 | 1820-1112 | 8 | | IC FF TTL LS D-TYPE POS-EDGE-TRIG | 01295 | SN74LS74AN |
| U15 | 1820-1112 | 8 | | IC FF TTL LS D-TYPE POS-EDGE-TRIG | 01295 | SN74LS74AN |
| U16 | 1820-2657 | 8 | 2 | IC GATE TTL ALS OR QUAD 2-INP | 01295 | SN74ALS32N |
| U17 | 1820-0693 | 8 | 2 | IC FF TTL S D-TYPE POS-EDGE-TRIG | 01295 | SN74S74AN |
| U18 | 1813-0225 | 7 | 1 | CRYSTAL-CLOCK-OSCILLATOR | 28480 | 1813-0225 |
| U19 | 1820-0693 | 8 | | IC FF TTL S D-TYPE POS-EDGE-TRIG | 01295 | SN74S74AN |
| U20 | 1820-1438 | 1 | 2 | IC MUXR/DATA-SEL TTL LS 2-TO-1-LINE QUAD | 01295 | SN74LS257AN |
| U21 | 1820-1245 | 8 | 2 | IC DCDR TTL LS 2-TO-4-LINE DUAL 2-INP | 01295 | SN74LS155N |
| U22 | 1820-1245 | 8 | | IC DCDR TTL LS 2-TO-4-LINE DUAL 2-INP | 01295 | SN74LS155N |
| U23 | 1820-1440 | 5 | 1 | IC LCH TTL LS QUAD | 01295 | SN74LS279N |
| U24 | 1820-2739 | 7 | 1 | IC GATE TTL ALS NOR QUAD 2-INP | 01295 | SN74ALS02N |
| U25 | 1818-1611 | 7 | 1 | IC | S4013 | HM6116P-3 |
| U27 | 1820-2300 | 8 | 1 | IC-Z80A SIO/2 | 28480 | 1820-2300 |
| U28 | 1820-2298 | 3 | 1 | IC-Z80A CPU | 28480 | 1820-2298 |
| | 1200-0817 | 4 | 1 | SOCKET-IC 40-CONT DIP DIP-SLDR | 28480 | 1200-0817 |
| U29 | 98628-81002 | 1 | 1 | ROM | 28480 | 98628-81002/81003 |
| | 1200-0861 | 5 | 1 | SOCKET-IC 28-CONT DIP DIP-SLDR | 28480 | 1200-0861 |
| U30 | 1820-1199 | 1 | 1 | IC INV TTL LS HEX 1-INP | 01295 | SN74LS04N |
| U31 | 1820-1281 | 2 | 1 | IC DCDR TTL LS 2-TO-4-LINE DUAL 2-INP | 01295 | SN74LS139N |
| U32 | 1820-1428 | 9 | 1 | IC MUXR/DATA-SEL TTL LS 2-TO-1-LINE QUAD | 01295 | SN74LS159N |
| U33 | 1820-1438 | 1 | | IC MUXR/DATA-SEL TTL LS 2-TO-1-LINE QUAD | 01295 | SN74LS257AN |
| U34 | 1820-1427 | 8 | 1 | IC DCDR TTL LS 2-TO-4-LINE DUAL 2-INP | 01295 | SN74LS156N |
| U35 | 1820-1568 | 8 | 1 | IC BFR TTL LS BUS QUAD | 01295 | SN74LS125AN |
| U36 | 1820-1202 | 7 | 1 | IC GATE TTL LS NAND TPL 3-INP | 01295 | SN74LS10N |
| U37 | 1820-2657 | 8 | | IC GATE TTL ALS OR QUAD 2-INP | 01295 | SN74ALS32N |
| U38 | 1820-1905 | 7 | 1 | IC GATE TTL LS NOR DUAL 5-INP | 07263 | 74LS260PC |
| U39 | 1820-1444 | 9 | 4 | IC MUXR/DATA-SEL TTL LS 2-TO-1-LINE QUAD | 01295 | SN74LS298N |
| U40 | 1820-1444 | 9 | | IC MUXR/DATA-SEL TTL LS 2-TO-1-LINE QUAD | 01295 | SN74LS298N |
| U41 | 1820-1444 | 9 | | IC MUXR/DATA-SEL TTL LS 2-TO-1-LINE QUAD | 01295 | SN74LS298N |
| U42 | 1820-1444 | 9 | | IC MUXR/DATA-SEL TTL LS 2-TO-1-LINE QUAD | 01295 | SN74LS298N |
| U43 | 1820-2740 | 0 | 1 | IC COMPTR TTL LS MAGTD 2-INP 8-BIT | 01295 | SN74LS688N |
| U44 | 1820-2206 | 3 | 2 | IC MISC TTL LS | 01295 | SN74LS640N |
| U45 | 1820-2206 | 3 | | IC MISC TTL LS | 01295 | SN74LS640N |
| W1 | 1258-0124 | 7 | 3 | PIN-PROGRAMING DUMPER .30 CONTACT | 91506 | 8136-475G1 |
| | 1200-0455 | 6 | 4 | SOCKET-IC 8-CONT DIP-SLDR | 28480 | 1200-0455 |
| W2 | 1258-0124 | 7 | | PIN-PROGRAMING DUMPER .30 CONTACT | 91506 | 8136-475G1 |
| | 1200-0455 | 6 | | SOCKET-IC 8-CONT DIP-SLDR | 28480 | 1200-0455 |
| | 1200-0455 | 6 | | SOCKET-IC 8-CONT DIP-SLDR | 28480 | 1200-0455 |
| W4 | 1258-0124 | 7 | | PIN-PROGRAMING DUMPER .30 CONTACT | 91506 | 8136-475G1 |
| | 1200-0455 | 6 | | SOCKET-IC 8-CONT DIP-SLDR | 28480 | 1200-0455 |
| | | | | MISCELLANEOUS | | |
| | 0380-1324 | 9 | 2 | STANDOFF-THD | 28480 | 0380-1324 |
| | 0515-0145 | 7 | 2 | SCREW-MACH M3 X 0.5 8MM-LG 90-DEG-FLH-HD | 00000 | ORDER BY DESCRIPTION |
| | 1251-2248 | 6 | 2 | LOCK SPRING-MICRO RBN CONN | 28480 | 1251-2248 |
| | 1251-7119 | 0 | 2 | END DISK-LATCH | 28480 | 1251-7119 |
| | 1251-7161 | 2 | 1 | CONNECTOR-50 POST RING | 28480 | 1251-7161 |
| | 2380-0001 | 9 | 2 | SCREW-MACH 6-32 .25-IN-LG FIL-HD-SLT | 00000 | ORDER BY DESCRIPTION |
| | 7101-0612 | 3 | 1 | I/O COVER | 28480 | 7101-0612 |
| | 7121-1909 | 5 | 1 | PC BOARD LABEL | 28480 | 7121-1909 |
| | 09826-90021 | 6 | 1 | MANUAL-DATA COMM | 28480 | 09826-90021 |
| | 1251-6624 | 0 | 1 | CONNECTOR-STD. TEST | 28480 | 1251-6624 |
| | 1251-6625 | 1 | 1 | TEST CONNECTOR (OPT. 001) | 28480 | 1251-6625 |
| | 5061-4215 | 2 | 1 | CABLE-DTE INTERFACE (FEMALE CONNECTOR) | 28480 | 5061-4215 |
| | 5061-4216 | 3 | 1 | CABLE-DCE INTERFACE (MALE CONNECTOR) | 28480 | 5061-4216 |
| | 7121-1957 | 3 | 1 | LABEL-SELECT CODE | 28480 | 7121-1957 |

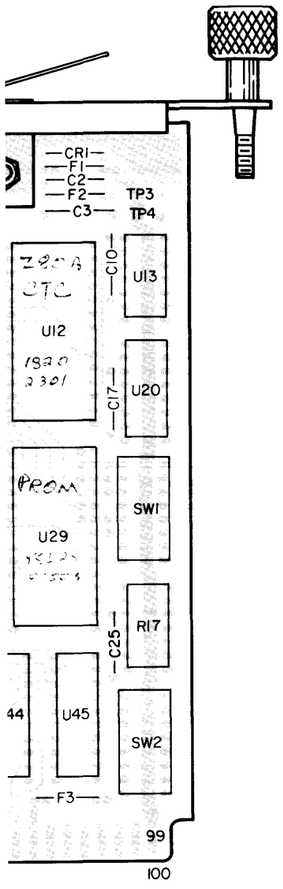



SSEMBLY OR SUB-

TED.

S, A STRAIGHT LINE

CHANGE INPUTS TO
ALLING JUMPERS TO
O +5V AND INSTALL

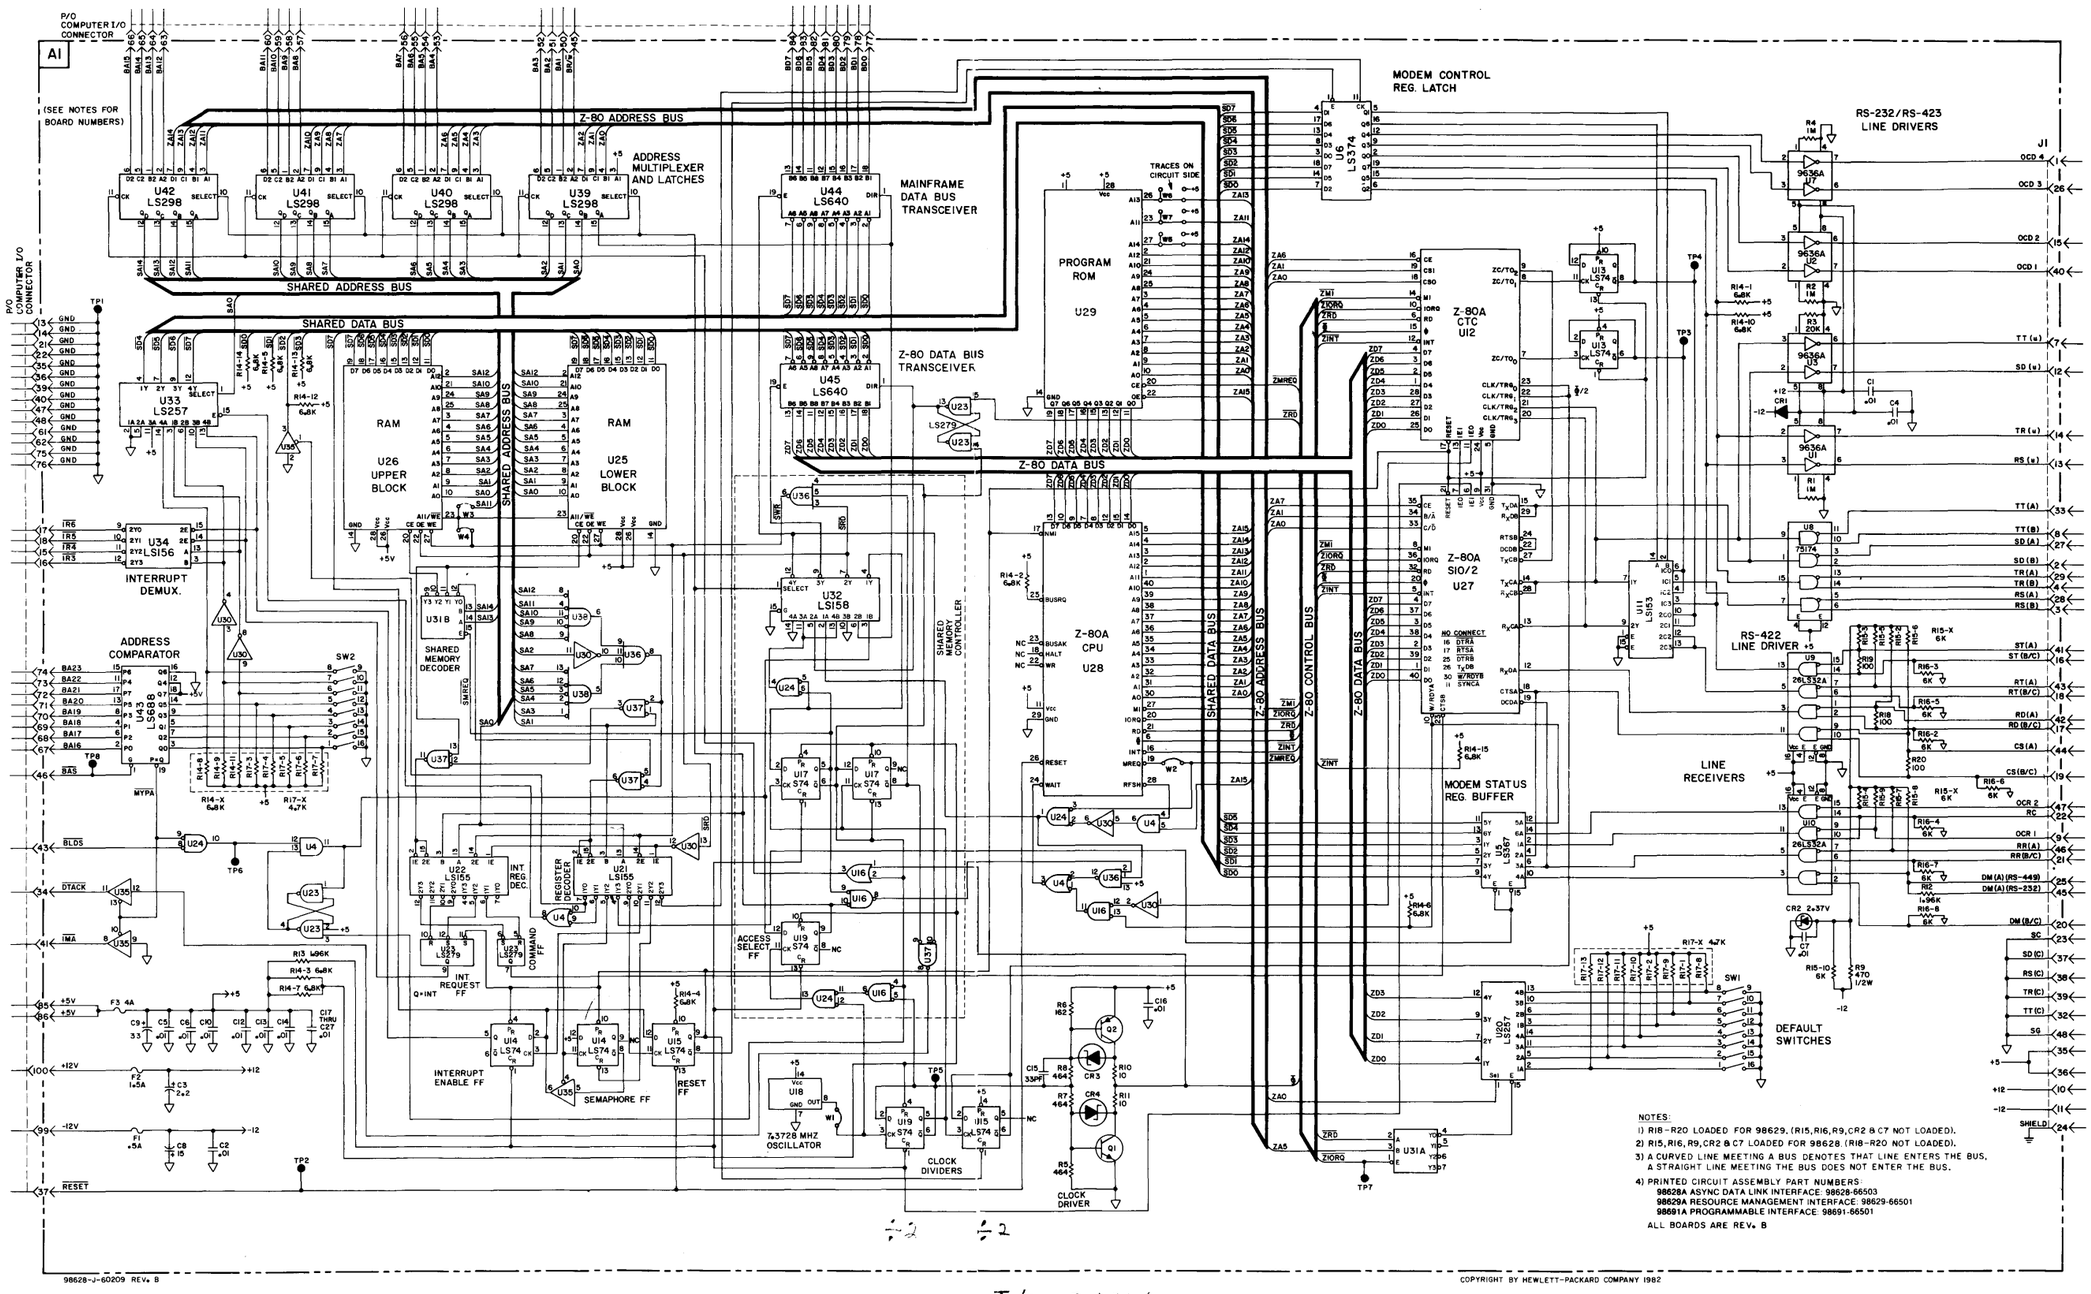


Φ/1 = 3.6864 MHZ

Φ/2 = 1.8432 MHZ

HEWLETT PACKARD

Roseville Networks Division
8000 Foothills Boulevard
Roseville, California 95678

# A1

DATA COMMUNICATIONS INTERFACE
SCHEMATIC DIAGRAM

Manual Part No. 98028-90000 & 98628-90001 | Dwg Rev B | Sheet 1 of 1




Part No. 98628-90001

Printed in U.S.A.
December 1983

**Artisan Technology Group** is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP