ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent E1518A* at our website: *Click HERE*

Agilent E1518A
4-Wire Resistance Measurement SCP
Data Sheet

- **Four channels of 4-wire Ohms measurement**
- **Programmable current level on each source channel**
- **x16 gain and 10 Hz filter on each input channel**

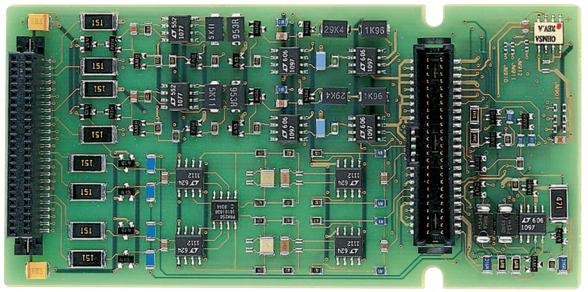

Agilent E1518A

STEP Dionysos Job: 210%XXX7997-0001 5966-2400E Comp: 04-13-00 Time: 12:00 OP: NN

Description

The Agilent E1518A 4-Wire Resistance Measurement SCP provides four programmable current source channels (with input over-voltage protection) for excitation. Each current source can be programmed to provide either 30 µA or 433 µA.

The E1518A also has four channels of analog input with x16 gain and 10 Hz, 2-pole, low-pass filters for measuring the voltage across the resistor.

The engineering conversion to Ohms or temperature is done automatically at the full scanning rate in the base VXI module.

Use the E1518A with the following VXI modules:

Model	Description
E1413C	64-Channel Scanning A/D Converter
E1415A	Algorithmic Closed Loop Controller
E1419A	Multifunction Measurement and Control Module

Refer to the Agilent Technologies Website for recent product updates, if applicable.

Agilent Technologies
Innovating the HP Way

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Product Specifications

These specifications for the E1518A reflect the combined performance of the scanning A/D and the E1518A SCP.

Measurement Ranges

DC Volts: ± 3.9 mV to ± 1 V Full Scale
Temperature:
Thermocouples: - 200 to + 1700 °C
Thermistors: - 80 to + 160 °C
RTD's: - 200 to + 850 °C
Resistance full scale ranges (Ω): 8, 32, 128, 512, 2K, 8K, 32K

Input Characteristics

Maximum input voltage (normal mode plus common mode):
Operating < ± 16 V peak
Damage level: > ± 42 V peak
Maximum common mode voltage:
Operating: < ± 16 V peak
Damage level: > ± 42 V peak
Common mode rejection:
0 to 60 Hz: –100 dB
Input impedance: > 100 MΩ differential

Maximum Tare Cal Offset

Maximum tare cal offset depends on A/D range and SCP gain.

A/D Range ±V F. Scale	Maximum Offset
16	0.20009
4	0.05007
1	0.01317
0.25	0.00349
0.0625	0.00112

Current Source

Minimum: 30.5 µA ± 9 nA
Maximum: 488.3 µA ± 60 nA

Resistance Measurements

Range FS	Current Amplitude	A/D Range	Maximum Resolution
32.77 kΩ:	30.518 µA	16 Vdc	1 Ω
8.192 kΩ:	30.518 µA	4 Vdc	.25 Ω
2.048 kΩ:	30.518 µA	1 Vdc	.0625 Ω
2.048 kΩ:	488.28 µA	16 Vdc	.0625 Ω
512 Ω:	488.28 µA	4 Vdc	.0156 Ω
128 Ω:	488.28 µA	1 Vdc	.0039 Ω
32 Ω:	488.28 µA	0.25 Vdc	.0009 Ω

Resistance Accuracy

Any input SCP/Most sensitive range. Four-wire connections.
MIN Current Source: ± [0.035% of rdg]
MAX Current Source: ± [0.02% of rdg]

STEP Dionysos Job: 210%XXX7999-0002 5966-2400E Comp: 04-13-00 Time: 12:00 OP: NN

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Measurement Accuracy dc Volts

For autorange, add .02% of reading for input voltages > ±4 V.

Accuracy — Gain x16

Range ± V FS	Linearity % of Reading:	Offset Error:	Noise 3σ:	Noise* 3σ:
0.0039:	0.01	3.8 μV	3.4 μV	2.9 μV
0.0156:	0.01	4.2 μV	4.4 μV	3.8 μV
0.0625:	0.01	4.9 μV	7.5 μV	6.3 μV
0.25:	0.01	8 μV	28 μV	23 μV
1:	0.01	31 μV	113 μV	64 μV

* A/D filter ON (min sample period ≥ 145 μs: ≤ 100 Hz scan rate 64 ch).

Temperature coefficients: *add tempco error to above table*

Gain: 15 ppm/°C (after *CAL)

Offset:

0-30 °C: 0.16 μV/°C

30-40 °C: 0.18 μV/°C

40-55 °C: 0.39 μV/°C

Temperature Measurement Accuracy

The following temperature accuracy specifications include instrument and firmware linearization errors. The linearization algorithm used is based on the ITS-90 transducer curves. Add your transducer accuracy to determine total measurement error.

Thermistors*

2252 Ω

0 to 30 °C:	30 to 70 °C:	70 to 80 °C:	80 to 100 °C:
0.006 °C	0.013 °C	0.010 °C	0.014 °C

5 kΩ

0 to 30 °C:	30 to 70 °C:	70 to 85 °C:
0.012 °C	0.014 °C	0.019 °C

5 kΩ Reference

–10 to 65 °C:	65 to 85 °C:
0.012 °C	0.013 °C

10 kΩ

0 to 30 °C:	30 to 60 °C:	60 to 90 °C:	90 to 115 °C:
0.015 °C	0.016 °C	0.018 °C	0.022 °C

RTDs *

100 Ω

–200 to 75 °C:	75 to 300 °C:	300 to 600 °C:	600 to 970 °C:
0.08 °C	0.21 °C	0.27 °C	0.37 °C

100 Ω Reference

–125 to 70 °C:
0.145 °C

Current Requirements (Amps)

5 V max	24 V max	-24 V max
0.01	0.033	0.039

Ordering Information

Description	Product No.
4-Wire Resistance Measurement SCP	E1518A

STEP Dionysos Job: 210%XXX8000-0003 5966-2400E Comp: 04-13-00 Time: 12:00 OP: NN

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Related Literature

2000 Test System and VXI Catalog CD-ROM,
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

2000 Test System and VXI Catalog,
Agilent Pub. No. 5980-0307E (overview of VXI products)

1998 Test System and VXI Products Data Book,
Agilent Pub. No. 5966-2812E

Online

Internet access for Agilent product information, services and support
www.agilent.com/find/tmdir

VXI product information
www.agilent.com/find/vxi

Defense Electronics Applications
www.agilent.com/find/defense_ATE

Agilent Technologies VXI Channel Partners
www.agilent.com/find/vxichanpart

Agilent Technologies' HP VEE Application Website
www.agilent.com/find/vee

Agilent Technologies Data Acquisition and Control Website
www.agilent.com/find/data_acq

Agilent Technologies Instrument Driver Downloads
www.agilent.com/find/inst_drivers

Agilent Technologies Electronics Manufacturing Test Solutions
www.agilent.com/go/manufacturing

Get assistance with all your test and measurement needs at
www.agilent.com/find/assist
or check your local phone book for the Agilent office near you.

Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources (www.agilent.com).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

Phone and fax
United States:
Agilent Technologies
(tel) 1 800 452 4844

Canada:
Agilent Technologies Canada Inc.
(tel) 1 877 894 4414

Europe:
Agilent Technologies
Test & Measurement
European Marketing Organisation
(tel) (31 20) 547 2000

Japan:
Agilent Technologies Japan Ltd.
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:
Agilent Technologies
Latin American Region Headquarters, U.S.A.
(tel) (305) 267 4245
(fax) (305) 267 4286

Australia/New Zealand:
Agilent Technologies Australia Pty Ltd.
(tel) 1 800 629 485 (Australia)
(fax) (61 3) 9272 0749
(tel) 0 800 738 378 (New Zealand)
(fax) (64 4) 802 6881

Asia Pacific:
Agilent Technologies, Hong Kong
(tel) (852) 3197-7777
(fax) (852) 2506-9284

Data Subject to Change
© Agilent Technologies 2000
Printed in the U.S.A. 04/2000
Publication No.: 5966-2400E

Agilent Technologies
Innovating the HP Way

STEP Dionysos Job: 210%XXX4407-0004 5966-2400E Comp: 04-12-00 Time: 08:24 OP: NN

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP