

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Kontron CP6001* at our website: *Click HERE*

» CP6001 «

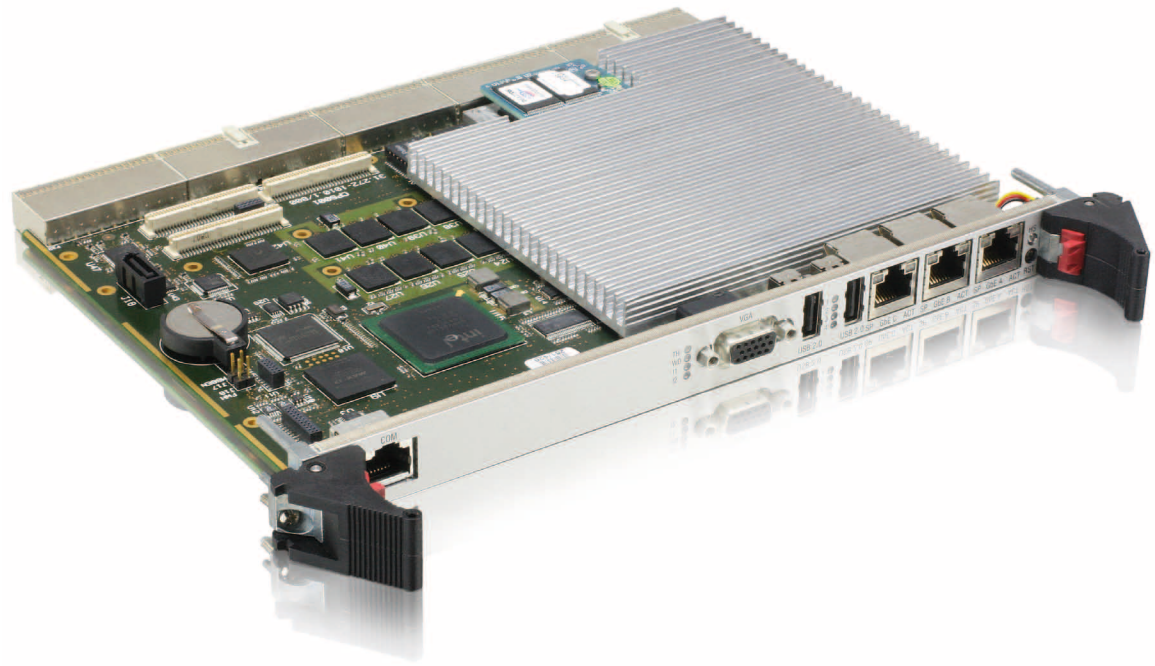

6U Intel® Core™2 Duo Rugged Processor Blade

» High computing and graphic performance
ULV and LV Intel® Core™2 Duo processors combined with 945 chipset

» Three Rugged Levels - R1, R2, R3 - for demanding application requirements
High shock and vibration resistant and conduction cooled versions

» Comprehensive I/O capabilities
3x GbE, 4x SATA, 2x DVI, onboard HDD, Flash ...

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

CP6001
6U Intel® Core™2 Duo Rugged Processor Blade

Explore the power and the potential of two cores in one processor with Kontron's CP6001 based on the Intel® Core™ Duo / Core™2 Duo processor.

The CP6001, a CompactPCI PICMG 2.16 compliant 6U CPU board, comes with three rugged levels, making it yet another addition to Kontron's rugged PICMG 2.16 portfolio. Based on the Intel® Core™ Duo / Core™2 Duo processor and mobile chipset, the CP6001 features high computing and graphic performance with a low thermal power design and a complete set of data, communication and multimedia interfaces.

» Maximum Ruggedization

Designed to withstand even the toughest environmental conditions, the passively cooled CP6001 featuring up to 4 GByte of soldered RAM and 2 GByte of soldered application flash comes in three rugged levels - defined as R1, R2 and R3. Versions R2 and R3 are available with E2 capabilities on project request (extended temperature range from -40° C to +85° C). The R1 version is designed for standard application requirements in air-cooled environments. The R2 version is ruggedized for high shock and vibration, air-cooled environments up to, and including VITA 47's EAC3/EAC6 (EAC6 requires special system components). The R3 version is fully conduction cooled and meets the VITA 47's ECC4 requirements.
The CP6001 features energy efficient embedded Intel® dual core processors. With the 1.2 GHz Intel® Core™ Duo U2500 ULV processor and the Intel® Core™2 Duo L7400 LV processor, the CP6001 has extraordinary performance-per-watt values. Based on the Intel® Mobile 945GM chipset with a front side bus of up to 667 MHz and ICH7-R Southbridge, the CP6001 provides high graphics performance for the two independent digital video outputs to the rear I/O as well as HDA audio capabilities.

» Comprehensive Versatility


The CP6001 offers comprehensive I/O capability with 3 x GbEthernet, 4 x SATA with RAID 0/1/5/10 functionality as well as 6 x USB 2.0, 2 x COM and VGA and/or DVI. It can also accommodate a PMC slot or an onboard 2.5" SATA HDD. With up to 8 GByte of USB or 2 GByte soldered flash, the CP6001 enables construction of a highly shock and vibration resistant system with non-rotating, non-volatile memory.

» Unique Security

The board provides safety and security via a trusted platform module, (TPM) 1.2, two redundant 8 Mbit firmware hubs (failover) and IPMI (Intelligent Platform Management Interface) support (PICMG 2.9 R1.0).

» Long-term Availability

Delivering a stable product based on Intel®'s embedded product line the CP6001 ensures long-term availability.

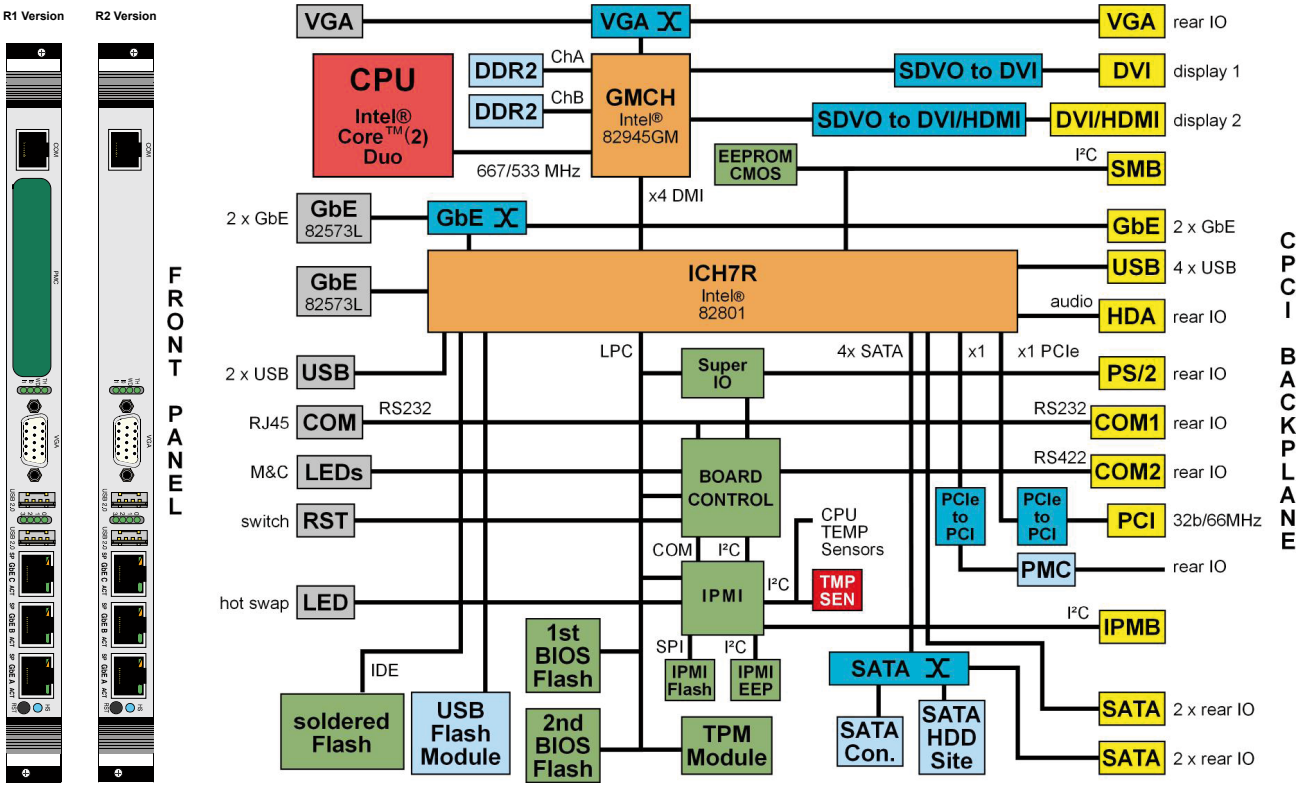

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com
www.kontron.com

Technical Information

Processor

Intel® Core™(2) Duo Processor (65nm):
- Core™ Duo U2500, 1.2 GHz, 533 MHz FSB, 2 MB L2 cache, (ULV)
- Core™2 Duo L7400, 1.5 GHz, 667 MHz FSB, 4 MB L2 cache, (LV)

Note: Versions incorporating other CPUs available on project request. Please contact us for further assistance.

Chipset

» GMCH Intel® 945GM, dual-channel DDR-2 memory controller, intern. graphics controller w. dual indep. graphic channels
» I/O Hub Intel® ICH7R, 4 SATA II controllers, 7 x USB 2.0 (used 6 x USB), 6 x PCIe x1 (used 5 x PCIe x1), 1 x LPC

Memory

» Up to 4 GByte DDR-2, 533/667MHz, w/o ECC, 2 channels: 2 GB soldered + 2 GB soldered
» Up to 4 GB NAND soldered Flash with onboard CompactFlash controller
» Two redundant 8 Mbit Firmware Hubs (FWH)
» Serial EEPROM (24LC64) 64 kbit for storing CMOS data when operating without battery

Onboard Controller

» Gigabit Ethernet: three Intel® 82573L Gigabit Ethernet PCI Express bus controllers:
- 1x fixed to front I/O
- 2x selectable between front or rear I/O to support PICMG 2.16

» Watchdog: FPGA-based, software configurable, two-stage Watchdog w. programmable timeout ranging from 125ms to 256s in 12 steps
» RTC, integrated in ICH7R
» IPMI Controller, Renesas H8S/2166 controller w. on-chip 512 kB Flash and 40 kB RAM; ext. 1 MB SPI Flash, 64 kbit EEPROM
» Super I/O: LPC Super I/O from SMSC SCH3112I-NU, 2x UART, HW-Monitor, PS2, fan control
» Trusted Platform Module (TPM): Infineon SLB 9635 TT 1.2

System Interconnect

» Serial ports: two COM ports (transceivers onboard)
- COM1 as RS232 COM1 on front and rear I/O
- COM2 as RS422 on the rear I/O interface

» USB NAND Flash: One USB port of the ICH7R is routed to a dedicated onboard connector, where USB-NAND-Flash modules can be connected
» SATA: Four Serial ATA II ports
- Two ports are routed to rear I/O
- Two are selectable between rear I/O or onboard usage:
  - One onboard SATA interface routed to a standard SATA connector
  - One available as 2.5" onboard HDD (mutually exclusive with PMC)

» PMC: one 32-bit / 66 MHz PCI PMC slot with rear I/O support, 5V and 3.3V PCI signalling supported

Front Panel Functions

(Note: CP6001-R3- conduction cooled- with reduced front I/O)

Ethernet	3 x 1000/100/10 Base Ethernet on RJ45
VGA	1 x 15-Pin D-Sub connector for standard analog displays
COM	1x RS232 UART interface on RJ45 connector
USB	2x 4-pin connectors
PMC	opening for PMC front panel (R1 only)
LEDs	2x LAN activity (yellow) and speed (green), one blue control LED for hot swap, 2x for IPMI, 1x watchdog, 1x thermal control, 4-LED-field for BIOS POST code or general purpose
Reset	reset button, guarded
Micro switch	for hot swap

I/O Table Summary

	Front I/O	Rear I/O	Onboard Connector	Total
Video	1 (*)	2	-	2
USB	2 (*)	4	-	6
Serial	1 (*)	2	-	2
PS/2 Mouse/Kbd	-	1	-	1
Ethernet	3 (*)	2	-	3
SATA	-	4	2	4
USB-Flash	-	-	1	1
PMC	1 CCMC on CP6001-R3	via J4	Pn1/Pn2/Pn4	1

*) not available on CP6001-R3

CompactPCI Bus Interface

» PICMG 2.0, 32-bit / 66 MHz
» Universal signaling, REQ/GNT for 7 slots
» Operating in system slot as system master and in peripheral slot in PCI passive mode (no communication to CPCI bus)

Rear I/O via J3/J4/J5

» J3: PICMG 2.16, VGA, COM 1/2, keyboard, mouse, USB 3-6, HDA, speaker, FAN sense
» J4: PMC I/O
» J5: SATA 1-4, DVI, HDMI

IPMI

IPMI 1.5 compliant

Compliancy

» CompactPCI Core Specification PICMG 2.0 Rev. 3.0
» CompactPCI Hot Swap Specification PICMG 2.1 R2.0
» CompactPCI System Management PICMG 2.9 R1.0
» CompactPCI Packet Switching Backplane PICMG 2.16 R1.0

Designed to meet or exceed:
- Safety: UL 1950, UL 94, CSA 22.2 No 950, EN 60950, IEC 950
- EMI/EMC: EN 55022 / EN 55024, EN 50081-1 / EN 6100-6-2

General

» Dimensions: 233 x 160 x 20.5 mm, 6U, 4HP
» Weight: R1: 622g; R2: 740g; R3: 698g
» MBTF: 180,332 h acc. to MIL-HDBK 217FN2, Ground Benign GB controlled at 30°C
» CP6001-R3 214881 h acc. to MIL-HDBK-217 FN2 Ground Benign 30°

Software Support

» AMI BIOS with POST codes
» Setup console redirection to serial port (VT100 mode) with CMOS setup access
» BIOS parameters saved in EEPROM
» Diskless, keyboardless, videoless operation, LAN boot support
» Board identification number accessible via EEPROM
» Support for Windows® XP, XP Embedded, Linux®, VxWorks® (other OSs may be possible, please contact us for information)

Power Consumption

» U2500 ULV 1.2 GHz and 1GB memory: max. 23W
» L7400 LV 1.5 GHz and 4GB memory: max. 35 W

Environmental

» CP6001-R1: IEC 60068-2-6; IEC 60068-2-27; IEC 61131-2; (0° to 60°C, forced air cooling required)
» CP6001-R2: R1 + VITA 47, EAC3/EAC6; normal and extended (-40° to +85°C, forced air cooling required)
» CP6001-R3: VITA 47, class ECC4
MIL-STD-810 Method 514 Proc 1
MIL-STD-810 Method 516 Proc 1
extended (-40 to +85°C, conduction cooling required)

Higher shock and vibration levels can be achieved when installed in a ruggedized system.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com
www.kontron.com


Ordering Information

Article	Order-No.	Description
CPU Boards		
CP6001-R1-1.2-2G	1022-9809	R1-Level, Intel® Core™ Duo U2500 ULV 1.2 GHz, 2GB soldered Memory
CP6001-R1-1.5-2G	36874	R1-Level, Intel® Core™2 Duo L7400 LV 1.5 GHz, 2GB soldered Memory
CP6001-R1-1.5-4G	37139	R1-Level, Intel® Core™2 Duo L7400 LV 1.5 GHz, 4GB soldered Memory 5)
CP6001-R2-1.2-2G-E2 [1)]	1022-8743	R2-Level, Intel® Core™ Duo U2500 ULV 1.2 GHz, 2GB soldered Memory, E2 (-40°C to +85°C)
CP6001-R3-1.5-2G-4GF-E1x [1)]	1022-3238	R3 Level, Intel® Core™2 Duo L7400 1.5 GHz, 2GB soldered Memory, E1x (-40°C to +70°C)
USB-Flash Modules		
FLASH-USB-xxx		NAND-Flash in various capacities
Services		
CP6001-MK2.5SATA [2) 3)]	37248	Mounting kit for 2,5" SATA-HDD onboard, mounting within 4HP
Rear Transition Modules		
CP-CTM80-3	29973	Various 4HP versions available
CP-RIO6-001	37459	With 2xDVI-D; 2xUSB2.0; 2xGbE; headers for 2xCOM, Flash, SATA, fan
CP-RIO6-001-HD	37460	With 1xDVI-D; 2xUSB2.0; 2xGbE; socket for SATA 2.5" disk; headers for 2xCOM, Flash, SATA, fan
CP-RIO6-001-HD-216	1036-8080	as 37460, but compliant to PICMG2.16 without rear Ethernet
Software Support		
KIT-CP6001 [4)]	36894	Documentation and Windows driver kit on CD-ROM
WXPE-BSP-CP6001 [4)]	1022-7603	Windows XP Embedded BSP CP6001
LIN-BSP-CP6001 [4)]	36895	Linux BSP CP6001 for Suse and RedHat
VXW-BSP-CP6001	36896	VxWorks BSP 6.x SMP support

Notes:

1) No onboard HDD possible, only conduction cooled PMC.
2) Mounting kit CP6001-MK2.5SATA for -R1 version only; mutually exclusive with PMC slot usage.
3) HDD must be ordered separately.
4) Free of charge, downloadable from the Internet.
5) Physical memory available for applications is less.


Please contact your local sales representative for other configuration options.

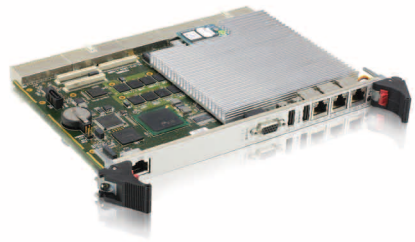

-R1



-R2

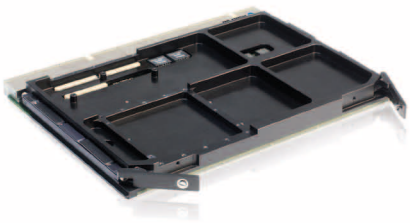

-R3

CORPORATE OFFICES

Europe, Middle East & Africa
Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 279
info@kontron.com

North America
14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
info@us.kontron.com

Asia Pacific
17 Building,Block #1,ABP.
188 Southern West 4th Ring Road
Beijing 100070, P.R.China
Tel.: + 86 10 63751188
Fax: + 86 10 83682438
info@kontron.cn

#CP6001# 03152011AR
All data is for information purposes only and not guaranteed for legal purposes. Subject to change without notice. Information in this datasheet has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. All brand or product names are trademarks or registered trademarks of their respective owners.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP