ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Kontron PMC-ETH2-RA* at our website: ***Click HERE***

kontron

» XMC-ETH2 «

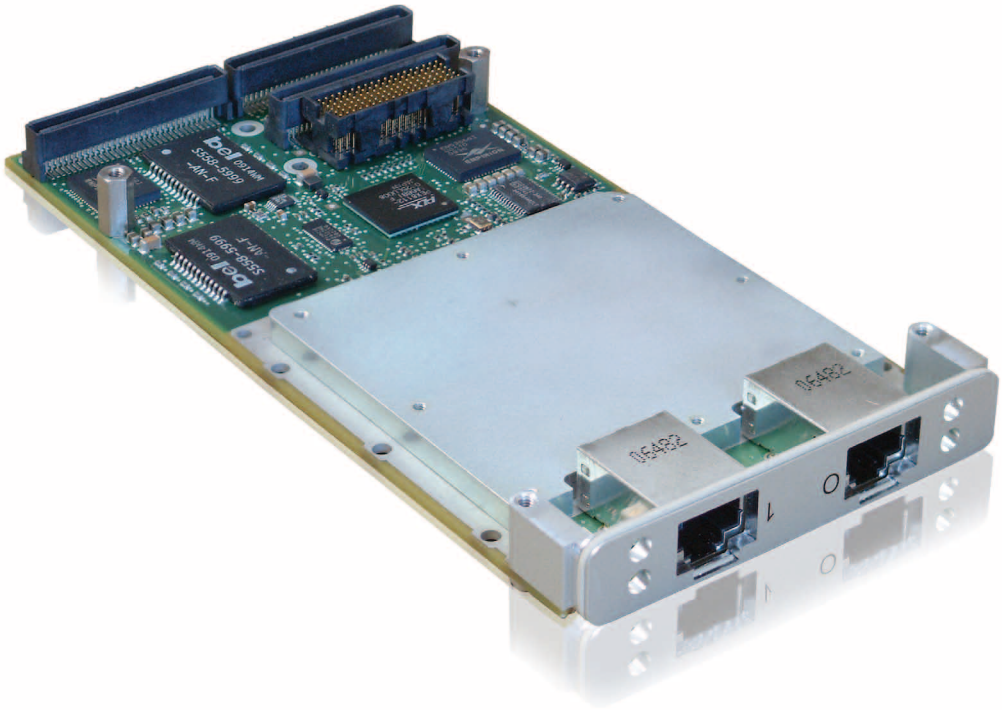


Dual Gigabit Ethernet Mezzanine Card

» General Purpose Long Life Ethernet Mezzanine
» x4 PCI Express™ XMC and PCI PMC interface to Host
» Standard Air- and Rugged Conduction-Cooled Versions
» Operating from -40° to +85°C

XMC-ETH2 Ethernet Mezzanine is designed to fit any VME, VPX or CompactPCI Single-Board Computer in the market.

XMC-ETH2 provides two gigabit copper links selectable in front or rear. When power on the P5 connector is detected, the bus interface is selected to be a PCI Express interface with four lines. Otherwise, it switches to PCI 33 MHz or 66 MHz, 32 bit on PMC connectors. The PMC PCI interface is compatible with 5V and 3.3V V(I/O) voltages.
Rugged conduction-cooled builds feature a PMC version with PCI connection and an XMC version with PCI Express.

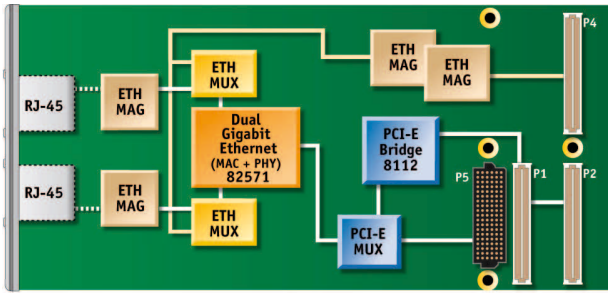

Technical Information

Controller	Dual Channel (Intel® 82571) Gigabit Ethernet Controller Automatic or manual selection between PCI 32 bit/33MHZ (up to PCI 32 bit/66MHz) on P1/P2 and PCIe® link with 4 lanes on P5 Two build options for rugged versions: - PMC with PCI connection from PCI 32 bit/33MHz or 66MHz on P1/P2 - XMC with connection speed from one PCIe® link with 4 lanes on P5
Copper Interface	Two 10/100/1000 BaseT Ethernet links either configurable on front RJ45 (with LED signaling) or to the rear P4
Software Support	Linux
Dimensions	74mmx149mm (conforming to IEEE 1386/air-cooled and VITA 20/conduction-cooled)

Environmental Specifications

	SA - Standard Commercial	RA - Rugged Air-Cooled	RC - Rugged Conduction-Cooled
Conformal Coating	Optional	Standard	Standard
Airflow	1.5 m/s	1.6 m/s	Not Applicable
Temperature	**VITA 47-Class AC1**	**VITA 47-Class AC3**	**VITA 47-Class CC4**
Cooling Method	Convection	Convection	Conduction
Operating	0° to +55°C	-40° to +70°C	-40° to +85°C
Storage	-45° to +85°C	-45° to +100°C	-45° to +100°C
Vibration Sine (Operating)	20/500 Hz: 2g	20/2,000 Hz: 3g	20/2,000 Hz: 5g
Random	**VITA 47-Class V1**	**VITA 47-Class V2**	**VITA 47-Class V3**
Shock (Operating)	20g/11 ms Half Sine	40g/20 ms Half Sine	40g/20 ms Half Sine
Altitude (Operating)	-1,640 to 15,000 ft	-1,660 to 33,000 ft	-1,640 to 50,000 ft
Relative Humidity	90% without condensation	95% without condensation	95% without condensation

Ordering Information

Article	Part-No.	Description
XMC-ETH2-SA	XMC-ETH2-SA-000	XMC-ETH2 Air-Cooled Commercial Build, front and rear Ethernet ports, PCI PMC and PCIe XMC interface
XMC-ETH2-SA	XMC-ETH2-SA-000V	XMC-ETH2 Air-Cooled Commercial Build, front and rear Ethernet ports, PCI PMC and PCIe XMC interface, conformal coating
PMC-ETH2-SA	PMC-ETH2-SA-000	PMC-ETH2 Air-Cooled Commercial Build, front and rear Ethernet ports, PCI PMC only interface, no P5 XMC connector
PMC-ETH2-RA	PMC-ETH2-RA-000	PMC-ETH2 Rugged Air-Cooled Build, front and rear Ethernet ports, PCI PMC only interface, no P5 XMC connector
PMC-ETH2-RC	PMC-ETH2-RC-000	PMC-ETH2 Rugged Conduction-Cooled Build, rear Ethernet ports only, PMC configuration, no P5 XMC connector
XMC-ETH2-RC	XMC-ETH2-RC-000	XMC-ETH2 Rugged Conduction-Cooled Build, rear Ethernet ports only, XMC configuration, no P1/P2 PMC connector

CORPORATE OFFICES

Europe, Middle East & Africa
Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 279
info@kontron.com

North America
14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
info@us.kontron.com

Asia Pacific
17 Building,Block #1,ABP.
188 Southern West 4th Ring Road
Beijing 100070, P.R.China
Tel.: + 86 10 63751188
Fax: + 86 10 83682438
info@kontron.cn

Embedded Alliance Premier

#XMC-ETH2# 01202010PDL
All data is for information purposes only and not guaranteed for legal purposes. Subject to change without notice. Information in this datasheet has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. All brand or product names are trademarks or registered trademarks of their respective owners.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP