



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

CAMAC Equipment


CAMAC, Computer Automated Measurement And Control, is an IEEE-standard (583), modular, high-performance, realtime data acquisition and control system concept.

Since 1969, CAMAC has been used in many thousands of scientific, industrial, aerospace, and defense test systems around the world.

APPLICATIONS

Avionics subsystem development and testing
Aircraft engine testing

3310 2-channel, ARINC-429 Aircraft Bus Interface

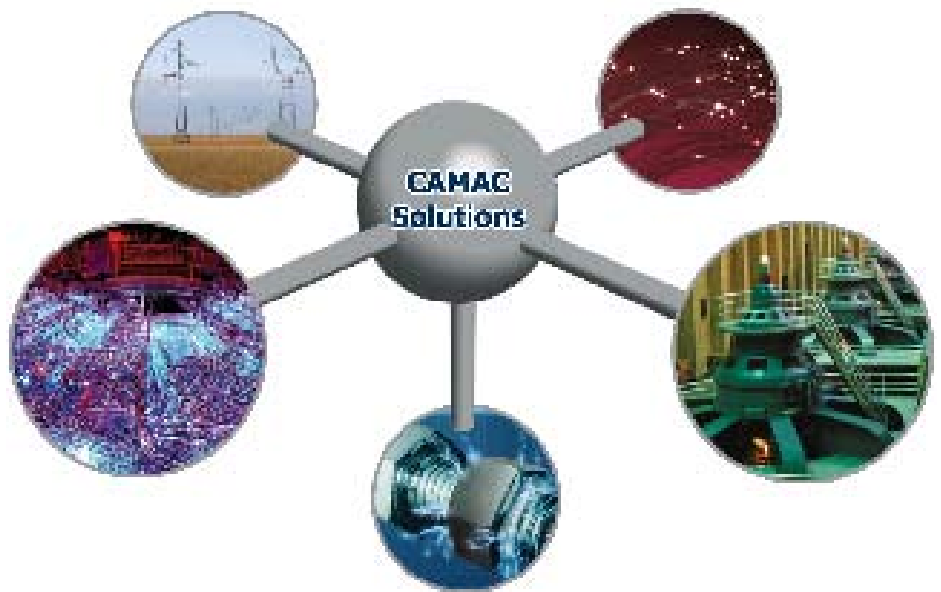

The Model 3310 is a single-width CAMAC module providing an interface for one transmitter and two receiver channels compatible with the ARINC-429 Aircraft Data Bus (Mark 33 Digital Information Transfer System).

FEATURES

- Two ARINC-429 receive channels and one transmit channel
- Selection of transmit/receive data rates
- A computer-selectable list memory for each receiver channel to read only
- Retransmission of FIFO data

GENERAL DESCRIPTION

The Model 3310 is a single-width CAMAC module providing an interface for one transmitter and two receiver channels compatible with the ARINC-429 Aircraft Data Bus (Mark 33 Digital Information Transfer System). ARINC-429 is the primary bus standard for modern civil air transports (such as Boeing 747). A channel of this system, as specified by Aeronautical Radio, Inc., covers the transmission of avionics information in a digital format. Information is sent from a designated output port over a single shielded and twisted pair of wires to all other system elements having need for that information. Bidirectional data flow on a given twisted pair is not permitted. Transmission is made "open loop" (i.e., receiver channels are not required to inform transmitter channels that information has been received).

DETAILED INFORMATION

Each transmit and receive channel is completely independent. The channel data rate can be set to 12.5 kilobits/second. The transmit channel includes a FIFO, and each receive channel includes a 256 x 32 RAM memory so that data can be efficiently written and read via the CAMAC Dataway. DMA block transfers can be used, if desired.

The transmitter output rate can be selected from one millisecond to 2.048 seconds in a binary increment (... , 128 mS, 256 mS, ...). Each ARINC message is generated by two CAMAC 16-bit Write operations. If the transmit FIFO is written at a rate slower than the one selected, a message is transmitted to the first "tic" following the availability of data. If a data Write operation is attempted when the transmit FIFO is full, the data is not written, and a Q = 0 response is given. For test purposes, the data at the "bottom" of the FIFO can be repeated at the selected rate.

For many applications, reading all messages on a channel will result in the storage of more data than necessary. The 3310 contains a list memory for each channel which selects desired data labels to be read (from the 256 possible combinations). The "list" for each channel is a 256 x 9 memory that can be written from the Dataway. Data associated with a label will be the "last received" ARINC word, even if there has not been another word associated with that label received since the last CAMAC Read operation.

For test purposes, transmit and receive channels can be "looped-back" under computer control. This allows testing of the module regardless of the external environment.

Connections to the ARINC-429 Bus are made through three 9-pin "D" type connectors mounted on the front panel of the module. The receive channels are socket connectors and the transmit channel is a pin connector.

POWER REQUIREMENTS

+6 volts — 2100 mA

WEIGHT:

.56 kg. (1 lb. 4 oz.)



ACCESSORIES

Model 5856-Axyz or Bxyz-Series Cable Assemblies

ORDERING INFORMATION

MODEL	DESCRIPTION
3310-B1A	2-channel, ARINC-429 Aircraft Bus Interface

Updated May June 3rd, 2005

Copyright © 2005 KineticSystems Company, LLC. All rights reserved.

KineticSystems Company, LLC

900 N. State St.
Lockport, IL 60441-2200

Toll-Free (US and Canada):

phone 1-800-DATA NOW
1-800-328-2669

Direct:

phone +1-815-838-0005
fax +1-815-838-4424

Email:

mkt-info@kscorp.com

To find your local sales representative or distributor or to learn more about KineticSystems' products visit:

www.kscorp.com



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com