

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Visit our website - *Click HERE*

Standard optical | **Sendix 5000 / 5020 (shaft / hollow shaft)** | **Push-Pull / RS422 / Open collector**

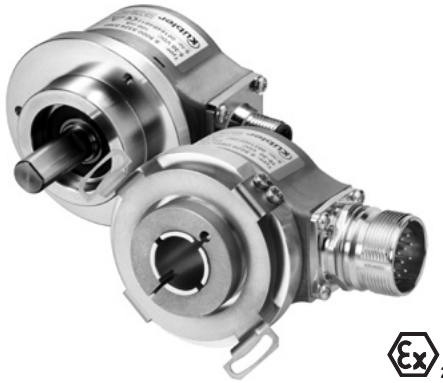

Due to their sturdy bearing construction in Safety-Lock™ Design, the Sendix 5000 and 5020 offer high resistance against vibration and installation errors.

The rugged housing, high protection level of up to IP67, as well as the wide temperature range of -40°C up to +85°C, make this product range the perfect encoder for all applications.

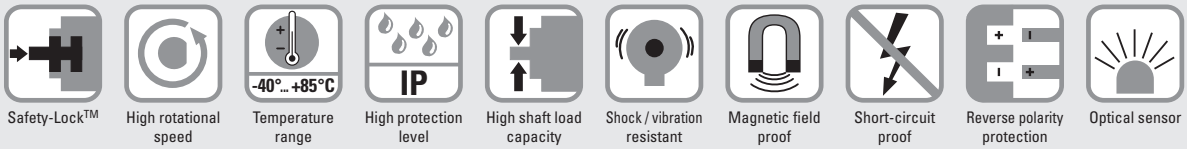

Safety-Lock™ | High rotational speed | Temperature range | High protection level | High shaft load capacity | Shock / vibration resistant | Magnetic field proof | Short-circuit proof | Reverse polarity protection | Optical sensor

Robust performance

- Increased resistance against vibrations and tolerance of installation errors, elimination of machine downtime and repairs thanks to sturdy bearing construction in "Safety-Lock™ Design".
- Ensures highest safety against field breakdowns and is thus suitable also for outside use thanks to its resistant die-cast housing and protection up to IP67.
- Undetachable clamping ring on hollow shaft encoders.
- Wide temperature range, -40°C ... +85°C.

NEW:

- Higher shock resistance.
- Higher vibration resistance.
- IP66 and IP67 protection level in one version.

Many variants

- Suitable connection variant for every specific case: cable connection, M12, M23, MIL and Sub-D connector.
- Reliable mounting in a wide variety of installation situations: comprehensive and proven fixing possibilities.
- Compatible with all US and European standards.
- Max. 5000 pulses per revolution.

NEW:

- Double number of standard pulse numbers.
- Variants with connector fitted in the cable – for error-free electrical connection to your control.
- Additional connector variants (M12 / 5-pin, Sub-D).
- Additional standard cable lengths.

Technology in detail

Robust Safety-Lock™ bearing structure



Cables with fitted connector



Undetachable clamping ring

Slotted clamping ring + slotted shaft



Tangential cable outlet



© Fritz Kübler GmbH, subject to errors and changes. 03/2017

Standard optical | **Sendix 5000 / 5020 (shaft / hollow shaft)** | **Push-Pull / RS422 / Open collector**

Order code Shaft version

8.5000	.	X	X	X	X	.	XXXX	.	P	XX	X	X
Type		a	b	c	d		e			f	g	h

a *Flange*

5 = synchro flange, IP66/IP67	ø 50.8 mm [2“]
6 = synchro flange, IP65	ø 50.8 mm [2“]
7 = clamping flange, IP66/IP67	ø 58 mm [2.28“]
8 = clamping flange, IP65	ø 58 mm [2.28“]
A = synchro flange, IP66/IP67	ø 58 mm [2.28“]
B = synchro flange, IP65	ø 58 mm [2.28“]
C = square flange, IP66/IP67	□ 63.5 mm [2.5“]
D = square flange, IP65	□ 63.5 mm [2.5“]
G = Euroflansch, IP66/IP67	ø 115 mm [4.53“] 1)
1 = servo flange, IP66/IP67	ø 50.8 mm [2“]
2 = servo flange, IP65	ø 50.8 mm [2“]
3 = square flange, IP66/IP67	□ 52.3 mm [2.06“]
4 = square flange, IP65	□ 52.3 mm [2.06“]
E = servo flange, IP66/IP67	ø 63.5 mm [2.5“]
F = servo flange, IP65	ø 63.5 mm [2.5“]

b *Shaft (ø x L), with flat*

1 = ø 6 x 10 mm [0.24 x 0.39“]
2 = ø 1/4 x 5/8“ (6.35 x 15.875 mm)
6 = ø 8 x 15 mm [0.32 x 0.59“]
3 = ø 10 x 20 mm [0.39 x 0.79“]
4 = ø 3/8 x 5/8“(9.5 x 15.875 mm)
B = ø 11 x 33 mm [0.43 x 1.30“], with feather key shaft slot 2)
5 = ø 12 x 20 mm [0.47 x 0.79“]
7 = ø 1/4 x 7/8“
8 = ø 3/8 x 7/8“

c *Output circuit / power supply*

4 = RS422 (with inverted signal) / 5 V DC
1 = RS422 (with inverted signal) / 5 ... 30 V DC
2 = Push-Pull (7272 compatible with inverted signal) / 5 ... 30 V DC
5 = Push-Pull (with inverted signal) / 10 ... 30 V DC
3 = Open collector (with inverted signal) / 5 ... 30 V DC
8 = Push-Pull (7272 compatible with inverted signal), without capacitor / 5 ... 30 V DC 3)

d *Type of connection – cable*

1 = axial cable, 1 m [3.28‘] PVC
A = axial cable, special length PVC *)
2 = radial cable, 1 m [3.28‘] PVC
B = radial cable, special length PVC *)

Type of connection – connector

P = axial M12 connector, 5-pin 4)
R = radial M12 connector, 5-pin 4)
3 = axial M12 connector, 8-pin
4 = radial M12 connector, 8-pin
7 = axial M23 connector, 12-pin
8 = radial M23 connector, 12-pin
Y = radial MIL connector, 10-pin
W = radial MIL connector, 7-pin 4)
9 = radial MIL connector, 6-pin 4)

Type of connection – connector with cable

L = radial cable with M12 connector, 8-pin, special length PVC *)
M = radial cable with M23 connector, 12-pin, special length PVC *)
N = radial cable with Sub-D connector, 9-pin, special length PVC *)

*) Available special lengths (connection types A, B, L, M, N:
0.3, 0.5, 1, 2, 3, 4, 5, 6, 8, 10, 12, 15, 20 m [0.98, 1.64, 3.28, 6.56, 9.84, 13.12, 16.40, 19,69, 26.25, 32.80, 39.37, 49.21, 65,62‘]
order code expansion .XXXX = length in dm
ex.: 8.5000.814A.1024.0030 (for cable length 3 m)

e *Pulse rate*

1, 2, 4, 5, 10, 12, 14, 20, 25, 28, 30, 32, 36, 50, 60, 64, 80, 100, 120, 125, 150, 180, 200, 240, 250, 256, 300, 342, 360, 375, 400, 500, 512, 600, 625, 720, 800, 900, 1000, 1024, 1200, 1250, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 4000, 4096, 5000
(e.g. 100 pulses => 0100)

f *Special output signal formats*

00 = standard output
other = see page 8

g *Capacitor*

0 = standard
A = no bypass capacitor (vector motor)
(only valide with output circuits 1, 3, 4, 5)

h *Special connector pin configuration*

0 = standard wiring
other = see page 6

Optional on request

- other pulse rates
- Ex 2/22 5)
- surface protection salt spray

Salt spray tested as standard type (deliverable as from 1 unit)

8.5000.73X4.XXXX-C

1) Only in conjunction with shaft type B.
2) Only in conjunction with flange type G.
3) Attention: no CE types!
4) Without inverted signal.
5) For the cable connection type, cable material PUR.

© Fritz Kübler GmbH, subject to errors and changes. 03/2017

Standard optical | **Sendix 5000 / 5020 (shaft / hollow shaft)** | **Push-Pull / RS422 / Open collector**

Order code Hollow shaft

8.5020	.	X	X	X	X	.	XXXX	.	P	XX	X	X
Type		a	b	c	d		e			f	g	h

a *Flange*
1 = with spring element, long, IP66/IP67
2 = with spring element, long, IP65
3 = with fastening arm, long, IP66/IP67
4 = with fastening arm, long, IP65
7 = with stator coupling, IP66/IP67 ø 65 mm [2.56"]
8 = with stator coupling, IP65 ø 65 mm [2.56"]
C = with stator coupling, IP66/IP67 ø 63 mm [2.48"]
D = with stator coupling, IP65 ø 63 mm [2.48"]

5 = with stator coupling, IP66/IP67 ø 57.2 mm [2.25"]
6 = with stator coupling, IP65 ø 57.2 mm [2.25"]

b *Hollow shaft*
1 = ø 6 mm [0.24"]
2 = ø 1/4"
9 = ø 8 mm [0.32"]
4 = ø 3/8"
3 = ø 10 mm [0.39"]
5 = ø 12 mm [0.47"]
6 = ø 1/2"
A = ø 14 mm [0.55"]
8 = ø 15 mm [0.59"]
7 = ø 5/8"

c *Output circuit / power supply*
4 = RS422 (with inverted signal) / 5 V DC
1 = RS422 (with inverted signal) / 5 ... 30 V DC
2 = Push-Pull (7272 compatible with inverted signal) / 5 ... 30 V DC
5 = Push-Pull (with inverted signal) / 10 ... 30 V DC

3 = Open collector (with inverted signal) / 5 ... 30 V DC
8 = Push-Pull (7272 compatible with inverted signal), without capacitor / 5 ... 30 V DC [1]

d *Type of connection – cable*
1 = radial cable, 1 m [3.28'] PVC
A = radial cable, special length PVC *)
E = tangential cable, 1 m [3.28'] PVC
F = tangential cable, special length PVC *)

Type of connection – connector
R = radial M12 connector, 5-pin [2]
2 = radial M12 connector, 8-pin
4 = radial M23 connector, 12-pin
6 = radial MIL connector, 7-pin [2]
7 = radial MIL connector, 10-pin

Type of connection – connector with cable
H = tangential cable, 0.3 m [0.98'] PVC, incl. M12 connector, 8-pin for central fastening
L = tangential cable with M12 connector, 8-pin, special length PVC *)
M = tangential cable with M23 connector, 12-pin, special length PVC *)
N = tangential cable with Sub-D connector, 9-pin, special length PVC *)

*) Available special lengths (connection types A, F, L, M, N):
0.3, 0.5, 1, 2, 3, 4, 5, 6, 8, 10, 12, 15, 20 m [0.98, 1.64, 3.28, 6.56, 9.84, 13.12, 16.40, 19,69, 26.25, 32.80, 39.37, 49.21, 65,62']
order code expansion .XXXX = length in dm
ex.: 8.5020.234A.1024.0030 (for cable length 3 m)

e *Pulse rate*
1, 2, 4, 5, 10, 12, 14, 20, 25, 28, 30, 32, 36, 50, 60, 64, 80, 100, 120, 125, 150, 180, 200, 240, 250, 256, 300, 342, 360, 375, 400, 500, 512, 600, 625, 720, 800, 900, 1000, 1024, 1200, 1250, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 4000, 4096, 5000
(e.g. 100 pulses => 0100)

f *Special output signal formats*
00 = standard output
other = see page 74

g *Capacitor*
0 = standard
A = no bypass capacitor (vector motor)
(only valide with output circuits 1, 3, 4, 5)

h *Special connector pin configuration*
0 = standard wiring
other = see page 73

Optional on request
- other pulse rates
- Ex 2/22 (not for type of connection E, F, H, L, M, N) [3]
- surface protection salt spray


Salt spray tested as standard type
(deliverable as from 1 unit)
8.5020.18X2.XXXX-C
8.5020.1AX2.XXXX-C

1) Attention: no CE types!
2) Without inverted signal.
3) For the cable connection type, cable material PUR.

© Fritz Kübler GmbH, subject to errors and changes. 03/2017

Standard optical | **Sendix 5000 / 5020 (shaft / hollow shaft)** | **Push-Pull / RS422 / Open collector**

Mounting accessory for shaft encoders		Order no.
Coupling	bellows coupling ø 19 mm [0.75“] for shaft 6 mm [0.24“]	**8.0000.1102.0606**
	bellows coupling ø 19 mm [0.75“] for shaft 10 mm [0.39“]	**8.0000.1102.1010**

Mounting accessory for hollow shaft encoders	Dimensions in mm [inch]	Order no.
Cylindrical pin, long for flange with spring element (flange type 1 + 2)	with fixing thread 	**8.0010.4700.0000**

Isolation / adapter inserts for hollow shaft encoders order code 8.5020.X8XX.XXXX	D1	Isolation insert
Thermal and electrical isolation of the encoders (Temperature range -40 ... +115°C [-40°F ... +239°F]) Isolation inserts prevent currents from passing through the encoder bearings. These currents can occur when using inverter controlled three-phase or AC vector motors and considerably shorten the service life of the encoder bearings. In addition the encoder is thermally isolated as the plastic does not transfer the heat to the encoder.		
	6 mm [0.24“]	**8.0010.4021.0000**
	8 mm [0.32“]	**8.0010.4020.0000**
	10 mm [0.39“]	**8.0010.4023.0000**
	12 mm [0.47“]	**8.0010.4025.0000**
	1/4“	**8.0010.4022.0000**
	3/8“	**8.0010.4024.0000**
	1/2“	**8.0010.4026.0000**

Connection technology		Order no.
Cordset, pre-assembled	M12 female connector with coupling nut, 8-pin 2 m [6.56’] PVC cable	**05.00.6041.8211.002M**
	M23 female connector with coupling nut, 12-pin 2 m [6.56’] PVC cable	**8.0000.6901.0002**
Connector, self-assembly (straight)	M12 female connector with coupling nut, 8-pin	**05.CMB 8181-0**
	M23 female connector with coupling nut, 12-pin	**8.0000.5012.0000**
	MIL female connector with coupling nut, 10-pin	**8.0000.5062.0000**

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Technical data

Mechanical characteristics		
Maximum speed	IP65	12000 min^{-1} 6000 min^{-1} (continuous)
	IP66/IP67	6000 min^{-1} 3000 min^{-1} (continuous)
Mass moment of inertia	shaft version	approx. 1.8 x 10^{-6} kgm^2
	hollow shaft version	approx. 6 x 10^{-6} kgm^2
Starting torque at 20°C [68°F]	IP65	< 0.01 Nm
	IP66/IP67	< 0.05 Nm
Shaft load capacity	radial	100 N
	axial	50 N
Weight		approx. 0.4 kg [14.11 oz]
Protection acc. to EN 60529		
	without shaft seal	IP65
	with shaft seal	IP66/IP67
Working temperature range		-40°C [1] ... +85°C [-40°F [1] ... +185°F]
Material	shaft	stainless steel
Shock resistance acc. to EN 60068-2-27		3000 m/s^2, 6 ms [2]
Vibration resistance acc. to EN 60068-2-6		300 m/s^2, 10 ... 2000 Hz [3]

1) With connector: -40°C [-40°F], cable fixed: -30°C [-22°F], cable moved: -20°C [-4°F].
2) For MIL connectors: 2500 m/ s^2
3) For MIL connectors: 100 m/ s^2

© Fritz Kübler GmbH, subject to errors and changes. 03/2017

Standard optical | Sendix 5000 / 5020 (shaft / hollow shaft) | Push-Pull / RS422 / Open collector

Electrical characteristics

Output circuit	RS422 (TTL compatible)	RS422 (TTL compatible)	Push-Pull	Push-Pull (7272 compatible)	Push-Pull (7272 compatible, without capacitor)	Open collector (7273)
Order code	1	4	5, 7	2	8	3
Power supply	5 ... 30 V DC	5 V DC (±5 %)	10 ... 30 V DC	5 ... 30 V DC	5 ... 30 V DC	5 ... 30 V DC
Power consumption (no load)	typ. 40 mA max. 90 mA	typ. 40 mA max. 90 mA	typ. 50 mA max. 100 mA	typ. 50 mA max. 100 mA	typ. 50 mA max. 100 mA	100 mA
Permissible load / channel	max. +/- 20 mA	max. +/- 20 mA	max. +/- 20 mA	max. +/- 20 mA	max. +/- 20 mA	+/- 20 mA sink at 30 V DC
Pulse frequency	max. 300 kHz	max. 300 kHz	max. 300 kHz	max. 300 kHz [1]	max. 300 kHz	max. 300 kHz
Signal level HIGH LOW	min. 2.5 V max. 0.5 V	min. 2.5 V max. 0.5 V	min +V - 1.0 V max. 0.5 V	min. +V - 2.0 V max. 0.5 V	min. +V - 2.0 V max. 0.5 V	
Rising edge time t_r	max. 200 ns	max. 200 ns	max. 1 µs	max. 1 µs	max. 1 µs	
Falling edge time t_f	max. 200 ns	max. 200 ns	max. 1 µs	max. 1 µs	max. 1 µs	
Short circuit proof outputs [2]	yes [3]	yes [3]	yes	yes	yes [3]	yes
Reverse polarity protection of the power supply	yes	no	yes	no	no	no
UL approval	file 224618					
CE compliant acc. to	EMC guideline 2014/30/EC RoHS guideline 2011/65/EU					

Terminal assignment – Standard wiring

Output circuit	Type of connection	Cable (isolate unused wires individually before initial start-up)											
1, 2, 3, 4, 5, 8	5000: 1, 2, A, B	Signal:	0 V	+V	0 Vsens	+Vsens	A	$\overline{A}$	B	$\overline{B}$	0	$\overline{0}$	⏚
	5020: 1, A, E, F	Cable colour:	WH	BN	GY PK	RD BU	GN	YE	GY	PK	BU	RD	shield

Output circuit	Type of connection	M12 connector, 5-pin						
1, 2, 3, 4, 5, 8	5000: P, R	Signal:	0 V	+V	A	B	0	⏚
	5020: R	Pin:	1	2	3	4	5	PH [1]

Output circuit	Type of connection	M12 connector, 8-pin									
1, 2, 3, 4, 5, 8	5000: 3, 4, L	Signal:	0 V	+V	A	$\overline{A}$	B	$\overline{B}$	0	$\overline{0}$	⏚
	5020: 2, H [2], L	Pin:	1	2	3	4	5	6	7	8	PH [4]

Output circuit	Type of connection	M23 connector, 12-pin											
1, 2, 3, 4, 5, 8	5000: 7, 8, M	Signal:	0 V	+V	0 Vsens	+Vsens	A	$\overline{A}$	B	$\overline{B}$	0	$\overline{0}$	⏚
	5020: 4, M	Pin:	10	12	11	2	5	6	8	1	3	4	PH [4]

Output circuit	Type of connection	MIL connector, 10-pin										
1, 2, 3, 4, 5, 8	5000: Y	Signal:	0 V	+V	+Vsens	A	$\overline{A}$	B	$\overline{B}$	0	$\overline{0}$	⏚
	5020: 7	Pin:	F	D	E	A	G	B	H	C	I	J

Output circuit	Type of connection	MIL connector, 7-pin							
1, 3, 4, 5, 8	5000: W	Signal:	0 V	+V	+Vsens	A	B	0	⏚
	5020: 6	Pin:	F	D	E	A	B	C	G

Output circuit	Type of connection	MIL connector, 6-pin						
1, 3, 4, 5, 8	5000: 9	Signal:	0 V	+V	A	B	0	⏚
		Pin:	A	B	E	D	C	

Output circuit	Type of connection	Sub-D connector, 9-pin									
1, 2, 3, 4, 5, 8	5000: N	Signal:	0 V	+V	A	$\overline{A}$	B	$\overline{B}$	0	$\overline{0}$	⏚
	5020: N	Pin:	9	5	1	6	2	7	3	8	PH [4]

1) Max. recommended cable length 30 m [98.43'].
2) If power supply correctly applied.
3) Only one channel allowed to be shorted-out:
   at +V= 5 V DC, short-circuit to channel, 0 V, or +V is permitted.
   at +V= 5 ... 30 V DC, short-circuit to channel or 0 V is permitted.
4) PH = shield is attached to connector housing.

© Fritz Kübler GmbH, subject to errors and changes. 03/2017

Standard optical | **Sendix 5000 / 5020 (shaft / hollow shaft)** | **Push-Pull / RS422 / Open collector**

Terminal assignment – Special connector pin configuration

Order code ⓗ	Output circuit	Type of connection	M12 connector, 8-pin								
7	1, 2, 3, 4, 5, 8	5000: 3, 4, L	Signal:	0 V	+V	A	$\overline{A}$	B	$\overline{B}$	0	$\overline{0}$	⏚
		5020: 2, H[2], L	Pin:	7	2	1	3	4	5	6	8	PH [1]

Order code ⓗ	Output circuit	Type of connection	MIL connector, 6-pin						
1	1, 3, 4, 8	5000: 9	Signal:	0 V	+V	A	B	0	⏚
			Pin:	A, F	B	D	E	C	

Order code ⓗ	Output circuit	Type of connection	MIL connector, 7-pin						
4	1, 3, 4, 8	5000: W	Signal:	0 V	+V	A	$\overline{A}$	B	$\overline{B}$	⏚
		5020: 6	Pin:	F	D	A	C	B	E	G


Order code ⓗ	Output circuit	Type of connection	MIL connector, 10-pin									
6	1, 2, 3, 4, 5, 8	5000: Y	Signal:	0 V	+V	A	$\overline{A}$	B	$\overline{B}$	0	$\overline{0}$	⏚
		5020: 7	Pin:	F	D	A	H	B	I	C	J	G

Order code ⓗ	Output circuit	Type of connection	M12 connector, 5-pin						
9	1, 2, 3, 4, 5, 8	5000: P, R	Signal:	0 V	+V	A	B	0	⏚
		5020: R	Pin:	3	1	4	2	5	PH [1]

+V: Encoder power supply +V DC
0 V: Encoder power supply ground GND (0 V)
0 V_{sens} / +V_{sens}: Using the sensor outputs of the encoder, the voltage present can be measured and if necessary increased accordingly.

A, $\overline{A}$: Incremental output channel A
B, $\overline{B}$: Incremental output channel B
0, $\overline{0}$: Reference signal
PH ⏚: Plug connector housing (shield)


Top view of mating side, male contact base




M12 connector, 5-pin




M12 connector, 8-pin




M23 connector, 12-pin




MIL connector, 10-pin



MIL connector, 7-pin



MIL connector, 6-pin



Sub-D connector, 9-pin

1) PH = shield is attached to connector housing.
2) With type of connection H shield is not attached to connector housing.


© Fritz Kübler GmbH, subject to errors and changes. 03/2017









Standard optical | **Sendix 5000 / 5020 (shaft / hollow shaft)** | **Push-Pull / RS422 / Open collector**









Special output signal formats

All Kübler encoders come standard with six channels where A leads B in the clockwise direction and the standard index is gated with A & B. The tolerance of the wave form affects the control and, in some cases, may affect the smoothness of system operation.

Wave form tolerances

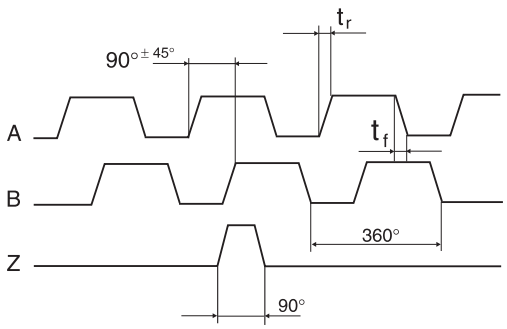

A leads B when the shaft is rotated in the clockwise direction viewing the shaft or collet end. This is the Kübler standard. This format applies to the pin key codes listed below.		
Order code ⓘ		
	Z gated with A & B. This is the Kübler standard. Z is 90° wide.	
01	Z gated with B. Z is 180° wide.	
02	Z gated with A. Z is 180° wide.	
03	Z ungated. Z is 330° to 360° wide.	
08	Z is 180° wide	
11	Z is a minimum with of 270° (electrical degrees).	
13	Z gated with $\overline{B}$. Z is 160° wide.	

B leads A when the shaft is rotated in the clockwise direction viewing the shaft or collet end. This format applies to the pin key codes listed below.		
Order code ⓘ		
04	Z gated with A & B. Z is 90° wide.	
05	Z gated with B. Z is 180° wide.	
06	Z gated with A. Z is 180° wide.	
07	Z ungated. Z is 330° to 360° wide.	
09	Z gated with $\overline{B}$. Z is 160° wide.	
10	Z is a negative marker gated with B. Z is 180° wide.	
12	Z has a minimum width of 270°.	

© Fritz Kübler GmbH, subject to errors and changes. 03/2017


Standard optical | **Sendix 5000 / 5020 (shaft / hollow shaft)** | **Push-pull / RS422 / Open collector**

Dimensions shaft version

Dimensions in mm [inch]

Synchro flange, ø 50.8 [2]
Flange type 5 and 6

1 3 x M3, 6 [0.24] deep

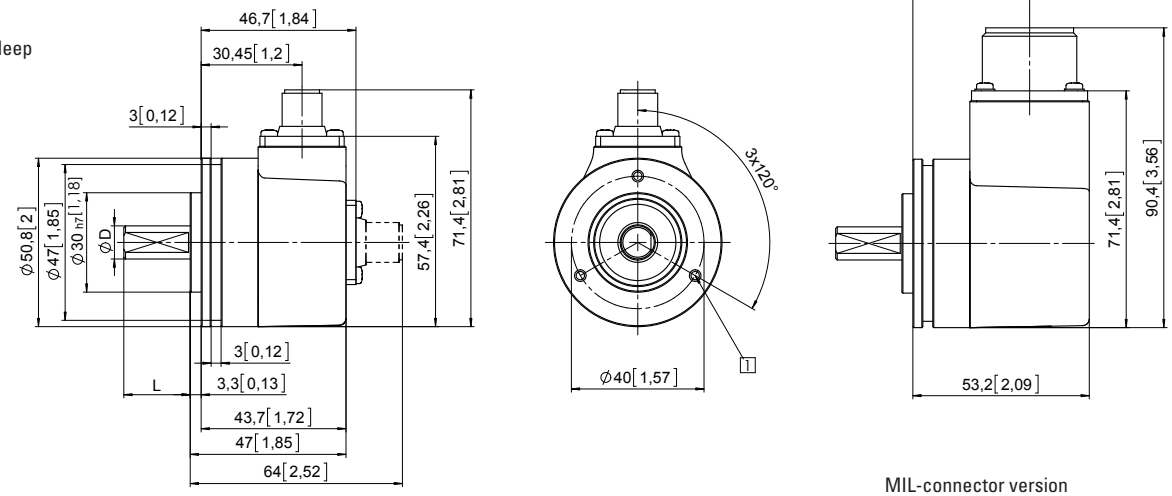


MIL-connector version

D	Fit	L
6 [0.24]	h7	10 [0.39]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
12 [0.47]	h7	20 [0.79]
1/4"	h7	5/8"
3/8"	h7	5/8"
1/4"	h8	7/8"
3/8"	h8	7/8"

Clamping flange, ø 58 [2.28]
Flange type 7 and 8

1 3 x M3, 6 [0.24] deep

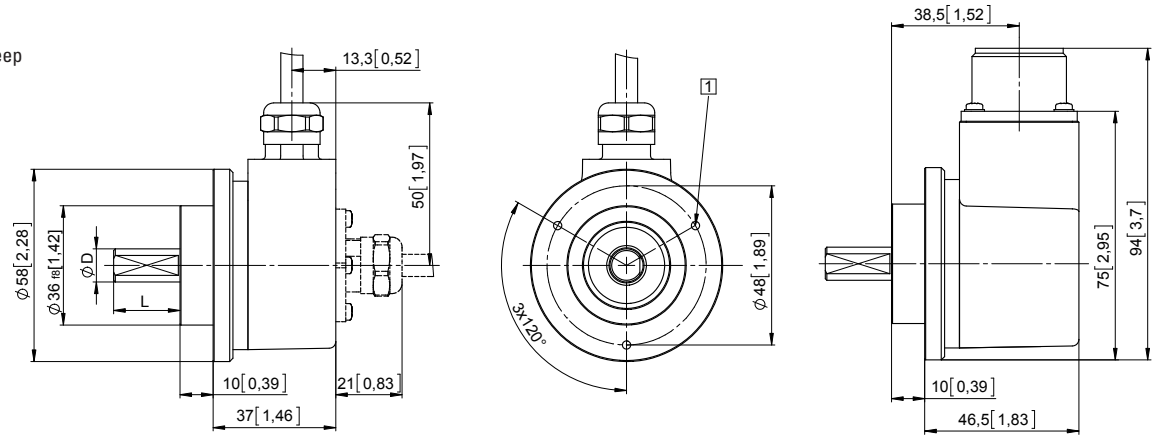

MIL-connector version

D	Fit	L
6 [0.24]	h7	10 [0.39]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
12 [0.47]	h7	20 [0.79]
1/4"	h7	5/8"
3/8"	h7	5/8"
1/4"	h8	7/8"
3/8"	h8	7/8"

© Fritz Kübler GmbH, subject to errors and changes. 03/2017


Standard optical | **Sendix 5000 / 5020 (shaft / hollow shaft)** | **Push-pull / RS422 / Open collector**

Dimensions shaft version

Dimensions in mm [inch]

Synchro flange, ø 58 [2.28]
Flange type A and B


1 3 x M4, 6 [0.24] deep

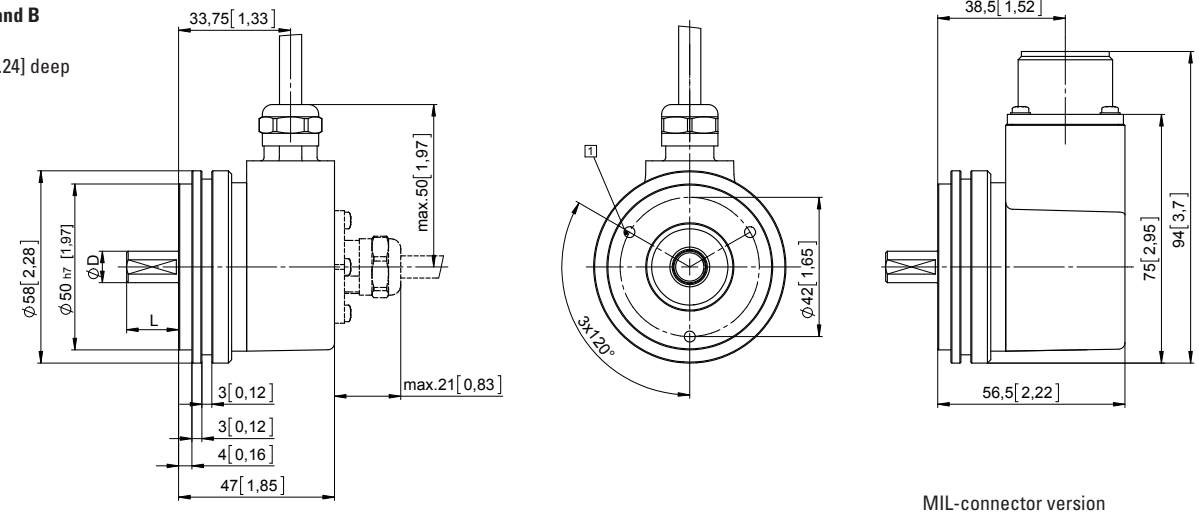

MIL-connector version

D	Fit	L
6 [0.24]	h7	10 [0.39]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
12 [0.47]	h7	20 [0.79]
1/4“	h7	5/8“
3/8“	h7	5/8“
1/4“	h8	7/8“
3/8“	h8	7/8“

Square flange, □ 63.5 [2.5]
Flange type C and D

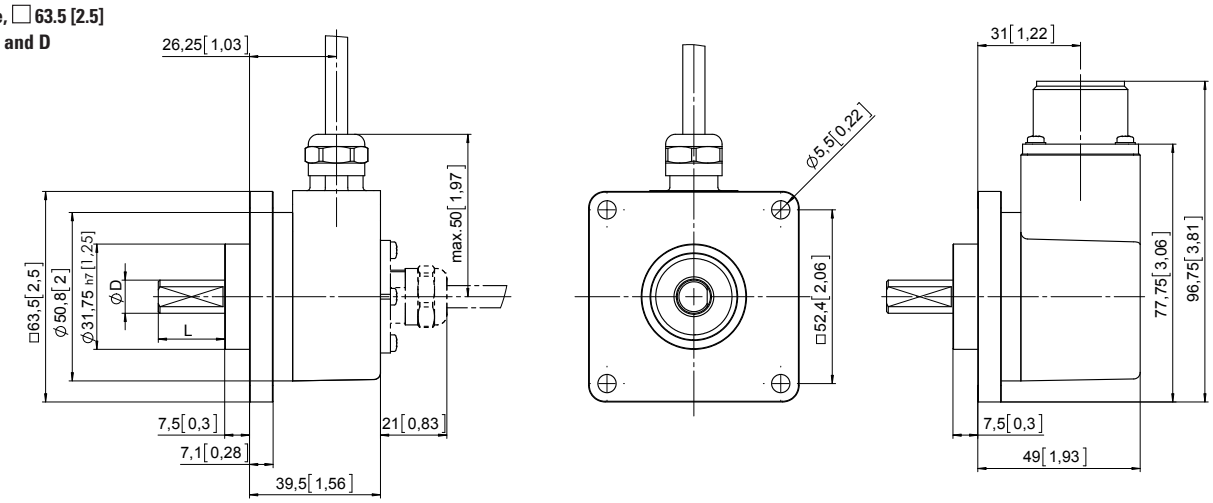

MIL-connector version

D	Fit	L
6 [0.24]	h7	10 [0.39]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
12 [0.47]	h7	20 [0.79]
1/4“	h7	5/8“
3/8“	h7	5/8“
1/4“	h8	7/8“
3/8“	h8	7/8“

© Fritz Kübler GmbH, subject to errors and changes. 03/2017


Standard optical | **Sendix 5000 / 5020 (shaft / hollow shaft)** | **Push-pull / RS422 / Open collector**

Dimensions shaft version

Dimensions in mm [inch]


Euro flange, ø 115 [4.53]
Flange type G


1 Feather key attached

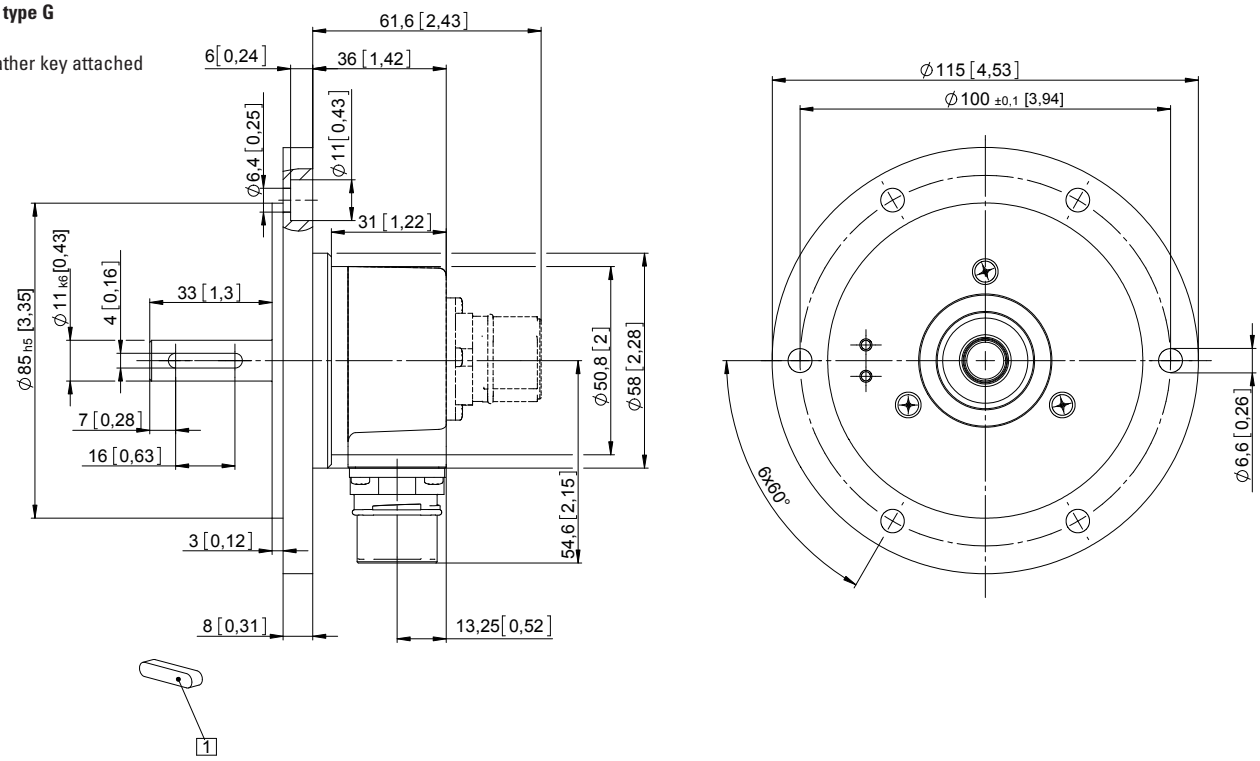


Servo flange, ø 50.8 [2]
Flange type 1 and 2

1 4-40 UNC x 6 [0.24] deep
2 6-32 UNC x 5 [0.2] deep

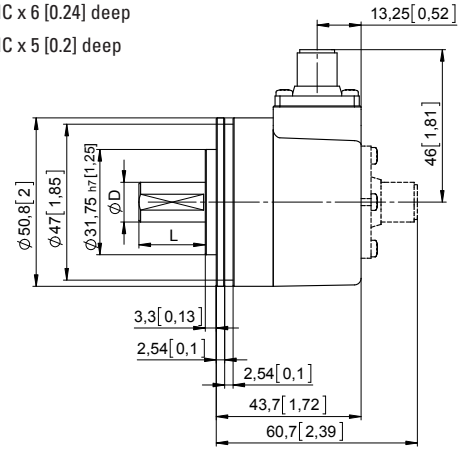



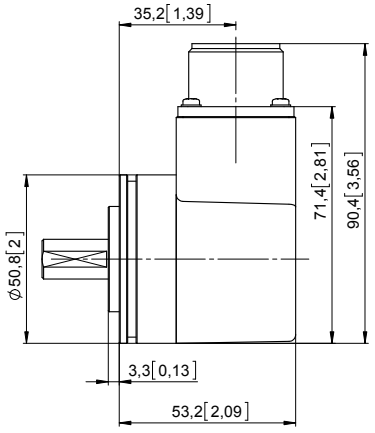

MIL-connector version

D	Fit	L
6 [0.24]	h7	10 [0.39]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
12 [0.47]	h7	20 [0.79]
1/4"	h7	5/8"
3/8"	h7	5/8"
1/4"	h8	7/8"
3/8"	h8	7/8"

© Fritz Kübler GmbH, subject to errors and changes. 03/2017


Standard optical | **Sendix 5000 / 5020 (shaft / hollow shaft)** | **Push-pull / RS422 / Open collector**

Dimensions shaft version

Dimensions in mm [inch]

Square flange, □ 52.3 [2.06]
Flange type 3 and 4

1 ø 4 [0.16]
2 6-32 UNC x 5 [0.2] deep

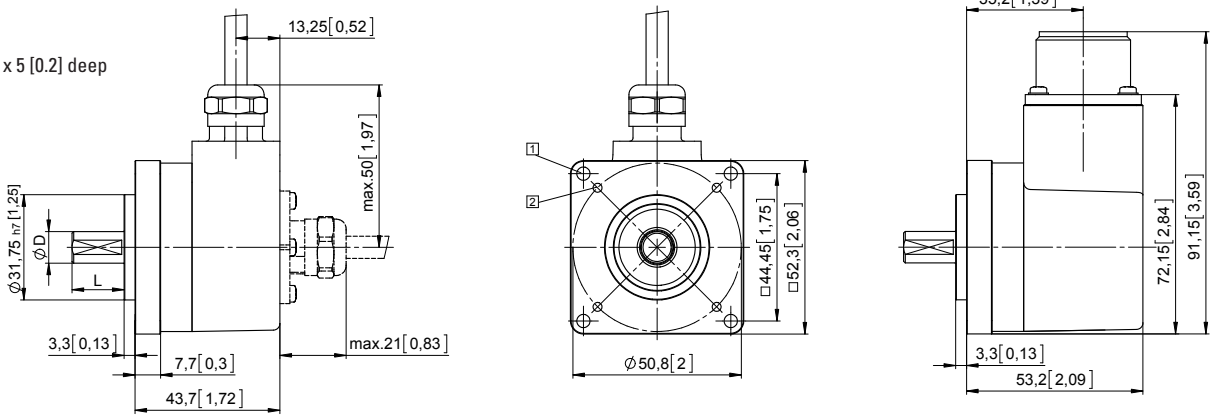


MIL-connector version

D	Fit	L
6 [0.24]	h7	10 [0.39]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
12 [0.47]	h7	20 [0.79]
1/4"	h7	5/8"
3/8"	h7	5/8"
1/4"	h8	7/8"
3/8"	h8	7/8"

Servo flange, ø 63.5 [2.5]
Flange type E and F

1 6-32 UNC x 5 [0.2] deep

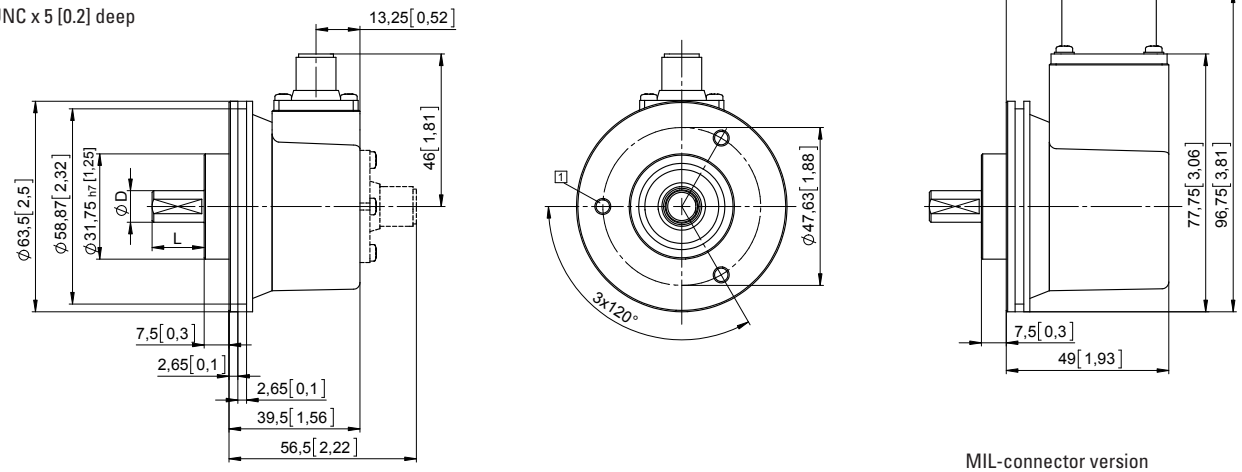

MIL-connector version

D	Fit	L
6 [0.24]	h7	10 [0.39]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
12 [0.47]	h7	20 [0.79]
1/4"	h7	5/8"
3/8"	h7	5/8"
1/4"	h8	7/8"
3/8"	h8	7/8"

© Fritz Kübler GmbH, subject to errors and changes. 03/2017


Standard optical | **Sendix 5000 / 5020 (shaft / hollow shaft)** | **Push-pull / RS422 / Open collector**


Dimensions hollow shaft version


Dimensions in mm [inch]

Flange with spring element, long
Flange type 1 and 2

1 3 x M3, 6 [0.24] deep
2 Slot spring element, recommendation: cylindrical pin DIN 7, ø 4 [0.16]
3 Recommended torque for the clamping ring 0.6 Nm

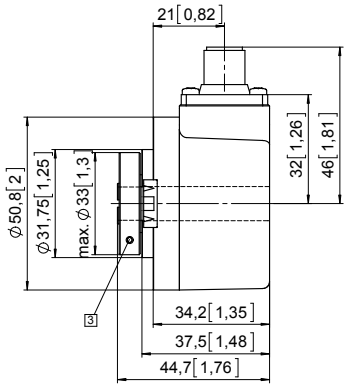

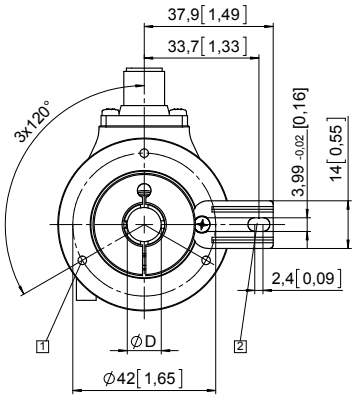

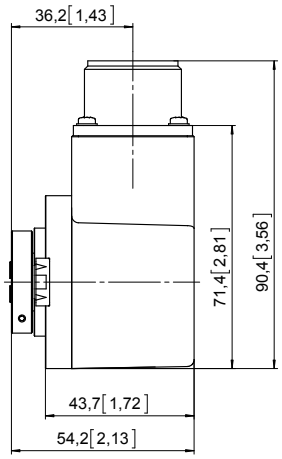



MIL-connector version

D	Fit
6 [0.24]	H7
8 [0.32]	H7
10 [0.39]	H7
12 [0.47]	H7
14 [0.55]	H7
15 [0.59]	H7
1/4"	H7
3/8"	H7
1/2"	H7
5/8"	H7

Flange with torque stop, long
Flange type 3 and 4

1 Recommended torque for the clamping ring 0.6 Nm

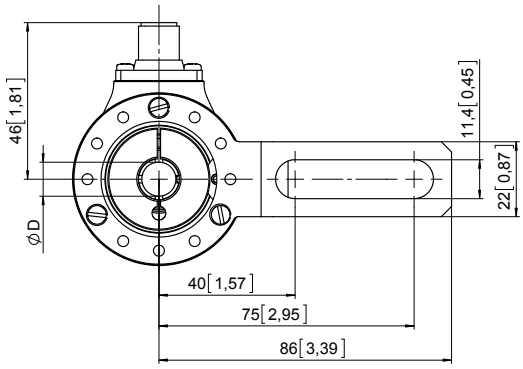

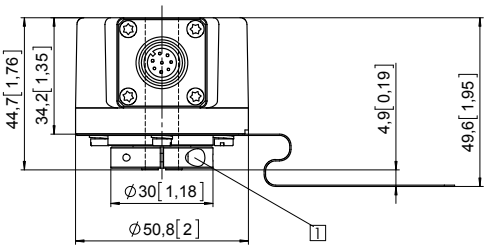

D	Fit
6 [0.24]	H7
8 [0.32]	H7
10 [0.39]	H7
12 [0.47]	H7
14 [0.55]	H7
15 [0.59]	H7
1/4"	H7
3/8"	H7
1/2"	H7
5/8"	H7

© Fritz Kübler GmbH, subject to errors and changes. 03/2017

Standard optical | **Sendix 5000 / 5020 (shaft / hollow shaft)** | **Push-pull / RS422 / Open collector**


Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with stator coupling, ø 65 [2.56]
Flange type 7 and 8

1 Recommended torque for the clamping ring 0.6 Nm


D	Fit
6 [0.24]	H7
8 [0.32]	H7
10 [0.39]	H7
12 [0.47]	H7
14 [0.55]	H7
15 [0.59]	H7
1/4"	H7
3/8"	H7
1/2"	H7
5/8"	H7

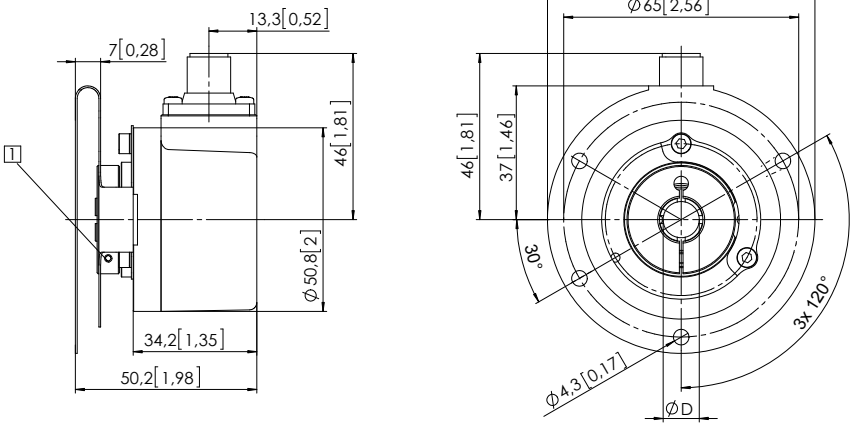

Flange with stator coupling, ø 63 [2.48]
Flange type C and D

1 Recommended torque for the clamping ring 0.6 Nm


D	Fit
6 [0.24]	H7
8 [0.32]	H7
10 [0.39]	H7
12 [0.47]	H7
14 [0.55]	H7
15 [0.59]	H7
1/4"	H7
3/8"	H7
1/2"	H7
5/8"	H7

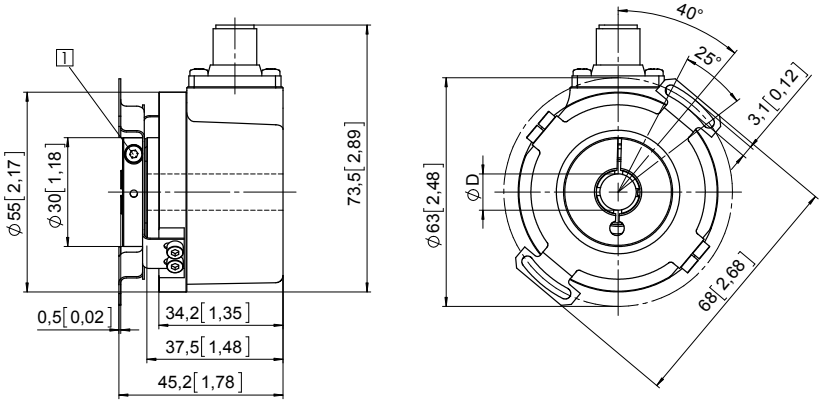

Flange with stator coupling, ø 57.2 [2.25]
Flange type 5 and 6

1 Recommended torque for the clamping ring 0.6 Nm

D	Fit
6 [0.24]	H7
8 [0.32]	H7
10 [0.39]	H7
12 [0.47]	H7
14 [0.55]	H7
15 [0.59]	H7
1/4"	H7
3/8"	H7
1/2"	H7
5/8"	H7

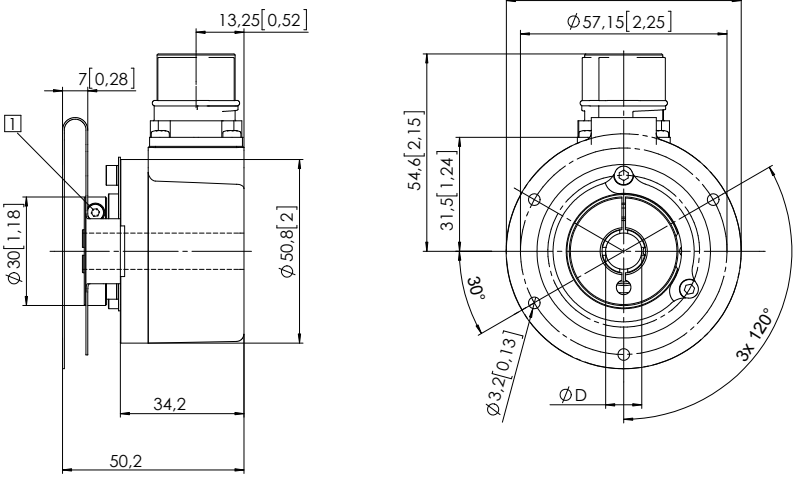

© Fritz Kübler GmbH, subject to errors and changes. 03/2017

Standard optical | **Sendix 5000 / 5020 (shaft / hollow shaft)** | **Push-pull / RS422 / Open collector**

Dimensions hollow shaft version

Dimensions in mm [inch]


Flange with spring element, long and tangential cable outlet
Type of connection E, F and H

1 3 x M3, 6 [0.24] deep

2 Slot spring element, recommendation: cylindrical pin DIN 7, ø 4 [0.16]

3 Recommended torque for the clamping ring 0.6 Nm

4 Shield is not applied on connector

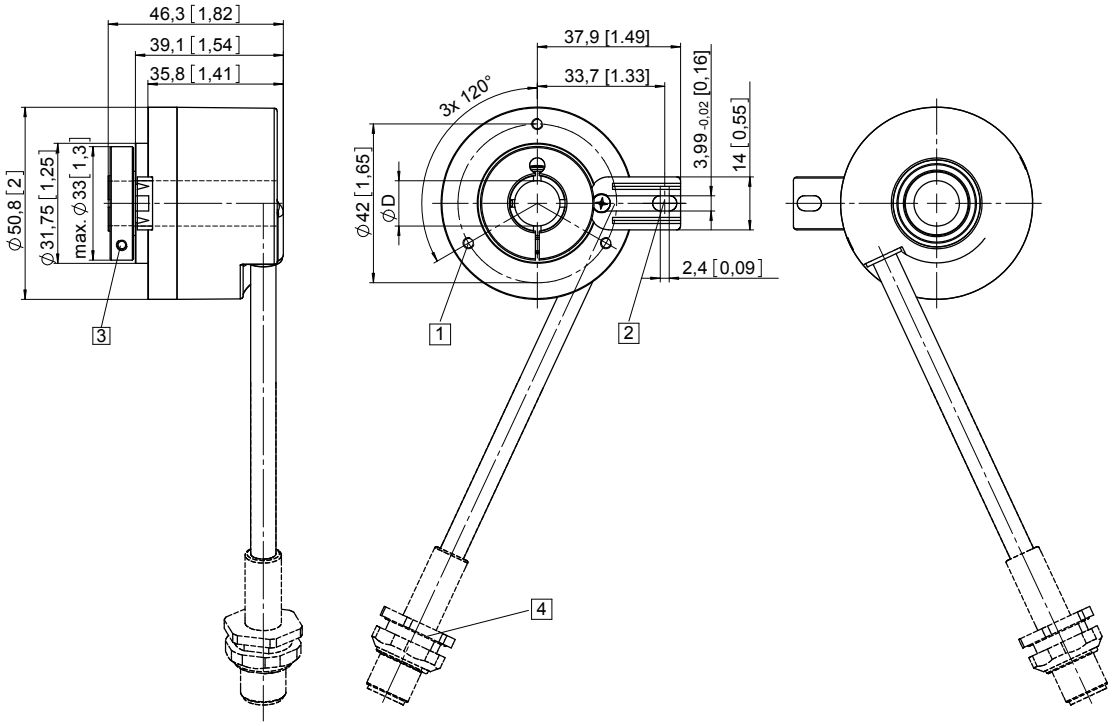

D	Fit
6 [0.24]	H7
8 [0.32]	H7
10 [0.39]	H7
12 [0.47]	H7
14 [0.55]	H7
15 [0.59]	H7
1/4"	H7
3/8"	H7
1/2"	H7
5/8"	H7

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP