



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

# Climo-Shaker (ISF4-X)



ISF4-X was developed for customers who need a large shaking capacity in a uniform environment (**temperature- / humidity- / CO<sub>2</sub>-controlled**). The ISF4-X has up to four (or five) completely independent shaking units. Furthermore the distance between the shaking units is individually adjustable. As the complete inner body is made out of stainless steel, the incubator can be easily sterilized with chemicals. Very low energy consumption due to the high efficiency shaker motors and controlled cooling system.



## Performance Features

- + up to four shaking machines in one incubator
- + large capacity on small floor space
- + humidity control (optional)
- + CO<sub>2</sub>-control (optional)
- + door switch
- + heated door windows\* (preventing condensation)
- + all stainless steel interior (cleaning, disinfection)
- + maintenance free operation
- + extremely low energy consumption
- + precise shaking speed control
- + at least three adjustable shaking diameters
- + easy handling due to separate displays and controls
- + modular electronics with CAN-bus
- + interface to PC: USB, Ethernet

\* only standard in machines with humidity control

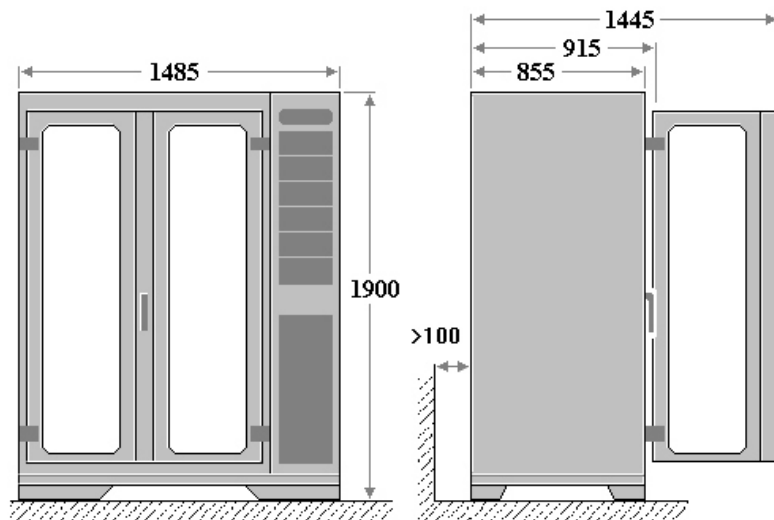

**Adolf Kühner AG**, Dinkelbergstrasse 1, CH-4127 Birsfelden (Basel), Switzerland  
fon: +41 61 319 93 93, fax: +41 61 319 93 94, [www.kuhner.com](http://www.kuhner.com), [office@kuhner.com](mailto:office@kuhner.com)

# Climo-Shaker (ISF4-X)

Technical data	SMX1600	SMX1601	SMX1603
Refrigerator	no	yes *	yes *
Humidity control	no	no	yes
Temperature minimum	ambient + 10°C	ambient - 15°C	ambient - 15
Temperature maximum	80°C	80°C	80°C
Humidity maximum	-	-	85 % r.h.
Power consumption	< 1700W	< 2000W	< 2600W

## Machine

Outside (WxDxH)	1400 x 860 x 1900mm, see front page
Inside (WxDxH)	957 x 625 x 1640mm
Volume of interior	800 litre
Weight (without SF-X)	520kg
Illumination	Halogen
Operating menu in	English, French, German
Interface, standard	CAN-Bus
Interface, optional	USB, Ethernet, digital, analogue
Ambient temperature	10°C up to 35°C

## Temperature

Setting, digital	0.1°C
Accuracy, absolute	± 0.30°C (37°C)
Principle of sensor	Pt-100
Power of heating	1000W
Power of cooling *	250...420W
Air circulation	700m <sup>3</sup> /h

## Humidity

## (SMX1603)

maximum at 25..55°C	85% r.h.
Setting, digital	1% r.h.
Accuracy, absolute	± 2% r.h.
Principle of sensor	capacitive
Water refill	automatic
Water heater	300W
Door heater	220W

## Shaking unit SF-X (SMX1610)

Number of shaking-units	4
Tray, size	F (800x420mm)
Loading, maximum	25kg
Setting, digital	1 rpm
Accuracy, absolute	± 0.1 rpm
Timer	1s ... 999h
Acceleration	controlled
Active brake	adjustable
Stop on position	adjustable

## CO<sub>2</sub>

## (SMX1034)

Principle of sensor	Infrared, NDIR
Measuring range	0...20% CO <sub>2</sub>
Setting, digital	0.1%
Accuracy, absolute	± 0.42% at 20% CO <sub>2</sub>
Non-linearity	< 0.1%
Temperature range	5...60°C
CO <sub>2</sub> -supply	max. 1 bar overpressure

## Shaking motion

Speed	
* orbital, Ø 12.5mm	20...500 rpm
* orbital, Ø 25.0mm	20...400 rpm
* orbital, Ø 50.0mm	20...300 rpm

\* can be changed

\* linear motion available


## Mains connection

SMX1021:	220 - 240 V / 50-60 Hz
SMX1022:	190 - 210 V / 50-60 Hz

tray size	shake flask size														
	25 mL	50 mL	100 mL	150 mL	200 mL	250 mL	300 mL	500 mL	1000 mL	1500 mL	2000 mL	3000 mL	4000 mL	5000 mL	6000 mL
E 420x420	81	50	39	30	20	18	15	12	9	5	5	4	2	2	1
EX 500x420	90	62	42	36	27	22	21	14	9	8	6	4	3	2	2
F 800x420	153	100	74	60	40	40	30	26	16	12	9	8	5	4	3
EU 420x420	78	39	24	25	20	20	17	12	8	5	4	4	2	2	1
EXU 500x420	80	45	34	25	23	22	21	15	9	6	5	4	3	2	2
FU 800x420	109	89	50	50	38	38	34	26	15	12	9	7	5	4	4

**Adolf Kühner AG**, Dinkelbergstrasse 1, CH-4127 Birsfelden (Basel), Switzerland  
 fon: +41 61 319 93 93, fax: +41 61 319 93 94, [www.kuhner.com](http://www.kuhner.com), [office@kuhner.com](mailto:office@kuhner.com)

subject to change



**Kühner SHAKER**



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)