ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Laserglow Technologies LRS-0473-TSM-00100-10* at our website: *Click HERE*

Laserglow Product Datasheet

LRS-0473 DPSS Laser System

Laserglow Part Number: R47500XSX

This model is listed as **inactive** in our product database. Stock may be limited, and availability is subject to change without notice.



Similar Products:

For information about the other lasers in this product family visit:

http://www.laserglow.com/R47

Ordering:

Order Online Now or Request Quote:

http://www.laserglow.com/R47500XSX

Series Specifications:

Nominal Wavelength	473 nm
Output Type	CW
Laser Source Type	DPSS

Overview:

The LRS-0473 Series of Diode-Pumped Solid-State (DPSS) Lasers are ideal for applications requiring 1 mW to 1500 mW of 473 nm laser light with a high level of long-term output power stability and long operating lifetime at an aggressively competitive cost.

These lasers are commonly used for fluorescence excitation, optogenetics, PIV, Raman Spectroscopy, laser display and a broad spectrum of other applications. The driver is available as a complete FDA-compliant system or as an O.E.M. component with significantly reduced dimensions.

Available with TTL and Analog modulation, and in a wide array of output power and stability levels, Laserglow products are currently being used by some of the world's top universities and other prominent research facilities.

Key Features:

- Air cooled - no need for water cooling or external chiller
- Lightweight, compact design
- Efficient DPSS technology runs on standard AC power (85 - 264 V, 47 - 63 Hz)
- >10,000 hours continuous maintenance-free operating life
- TTL and Analog modulation (input via BNC connector) *lab-spec models only*
- Specially-tuned for clean modulation responses from 1-100 Hz *(on selected models)*
- Adjustable output power (via lockable dial) *lab-spec models only*
- LED display showing LD current, laser cavity temperature *lab-spec models only*
- FDA CDRH Compliant Class IIIb / Class IV enclosure
- 48-hour replacement coverage available for an additional fee on specific models

Package Includes:

- Laser Head
- Driver/Power Supply
- Power Cable
- BNC Connector (LabSpec models only)
- Keys, Safety Interlock
- Hard-shell Carrying Case

Specifications:

This spec sheet has been generated specifically for part number R47500XSX, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to R47500XSX have been highlighted below in **red + bold**.

Laser Form Factor	M	O	SS	**F**	N	NB	W
Output Power (mW)	<5, >50, >100	<5, >10, >50, >100, >200, >300, >500	>10, >50, >100	>200, >300, >400, **>500**	>600, >800, >1000, >1500	>2000, >3000, >5000	>2000
Output Power Stability (%RMS/4h)	<1, <3, <5, <10	<1, <2	<3, <5	<2, <3, <5, **<10**	<1, <2, <3, <5	<1, <2, <3, <5	<3, <5
FDA Safety Class	IIIa, IIIb	IIIa, IIIb, IV	IIIb	IIIb, **IV**	IV	IV	IV
Central Wavelength (nm)	472.58	472.58	472.58	**472.58**	472.58	472.58	472.58
Wavelength Tolerance (+/- nm)	1	1	1	**1**	1	1	1
Divergence (mrad, full angle)	<1.5	<1.5	<1.5	**<1.5**	<1.2	<1.2	<1
Beam Dimensions (mm, 1/e²)	1.2, 2	1.2, 2, 3	0.8	**3**	2, 3	3	3
Transverse Mode	TEM00	TEM00	TEM00	**Near TEM00**	TEM00	Near TEM00	TEM00
Longitudinal Modes	Multiple	Multiple	Multiple	**Multiple**	Multiple	Multiple	Multiple
Warm-up Time (minutes)	10	10	5	**10**	10	10	10
Optical Noise Amplitude (%RMS @ 20 Hz - 20 MHz)	<30	<30	<30	**<30**	<30	<30	<30
Spectral Linewidth (nm)	<0.15	<0.15	<0.15				
M^2	<1.2	<1.5, <2	<1.2	**<2**	<1.5, <3	<5	<1.5
Polarization Ratio	>100	>100	>100	**>100**	>100	>100	>100
Beam Pointing Stability (mrad)	<0.05	<0.05	<0.05	**<0.05**	<0.05		
IP rating			67				
Lateral Shock Tolerance (G's/6ms)			7				
Vertical Shock Tolerance (G's/6ms)			15				
Operating Temperature Range (°C)	10 to 35	10 to 35	1 to 60	**10 to 35**	20 to 30	10 to 35	20 to 30
Storage Temperature Range (°C)	-10 to	-10 to	-10 to	**-10 to 50**	-10 to	-10 to	-10 to
Max. Analog Modulation Freq. (Hz)	150, 30000	150, 30000	30000	150, 30000	30000	30000	30000
Max. TTL Modulation Freq. (Hz)	150, 10000, 30000	150, 30000	30000	150, **10000**, 30000	30000	30000	30000
Modulation Input Signal	0-5 VDC	0-5 VDC	0-5 VDC	**0-5 VDC**	0-5 VDC	0-5 VDC	0-5 VDC
Total Power Consumption (W)	20, 25	20, 25, 80	30	80			

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.
Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

Specifications Page 2:

This spec sheet has been generated specifically for part number R47500XSX, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to R47500XSX have been highlighted below in **red + bold**.

Laser Form Factor	M	O	SS	**F**	N	NB	W
Max. Power Input Duty Cycle	100%	100%	100%	**100%**	100%	100%	100%
Cooling Method	TEC	TEC	TEC	**TEC/Forced Air**	TEC/Forced Air	TEC/Forced Air	TEC/Forced Air
Standard Warranty (months)	12	12	12	**12**	12	12	12
MTTF (operational hours)	10000	10000	10000	**10000**	10000	10000	10000
Weight of Product or Laser Head (kg)	0.6	2		**1.6**	2.6	2.6	6.1
Beam Height from Base Plate (mm)	24.8	27.4	19	**45**	68.2	68.2	93.5
Dimensions of Product or Laser Head (mm)	140.8 (l) x 73 (w) x 46.2 (h)	197 (l) x 70 (w) x 50 (h)	100 (l) x 50 (w) x 38 (h)	**211.5 (l) x 88 (w) x 74 (h)**	240 (l) x 99 (w) x 94 (h)	240 (l) x 99 (w) x 94 (h)	346 (l) x 140 (w) x 125 (h)

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.
Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

Power Supply Options:

These lasers are available with several different power supply options. The model that you have selected is highlighted below, and any other options are shown for easy reference.

	Power Supply Type:	SM	SF
FDA-Compliant Standard 	Input Power	85v to 264v	**85v to 264v**
	Power Supply Weight (kg)	1.2	**2.3**
	Dimensions (mm)	133 (l) x 130 (w) x 65 (h)	**238 (l) x 146 (w) x 102 (h)**

	Power Supply Type:	FM	FF	FN	FO	FS
FDA-Compliant LabSpec 	Input Power	85v to 264v	85v to 264v	85v to 264v	85v to 264v	85v to 264v
	Power Supply Weight (kg)	1.5	2.6	2.6	2.6	1.5
	Dimensions (mm)	154 (l) x 155 (w) x 95 (h)	268 (l) x 145 (w) x 106 (h)	268 (l) x 145 (w) x 106 (h)	268 (l) x 145 (w) x 106 (h)	154 (l) x 155 (w) x 95 (h)

*Power supply may not be exactly as shown, see dimensional drawings on next 2 pages.


*Dimensions for fiber-integrated (I_) include laser head packaged inside.

Regulatory Classification:


The model you have selected (R47500XSX) requires the following safety label(s):



Dimensional Drawing - Laser Form Factor: F:

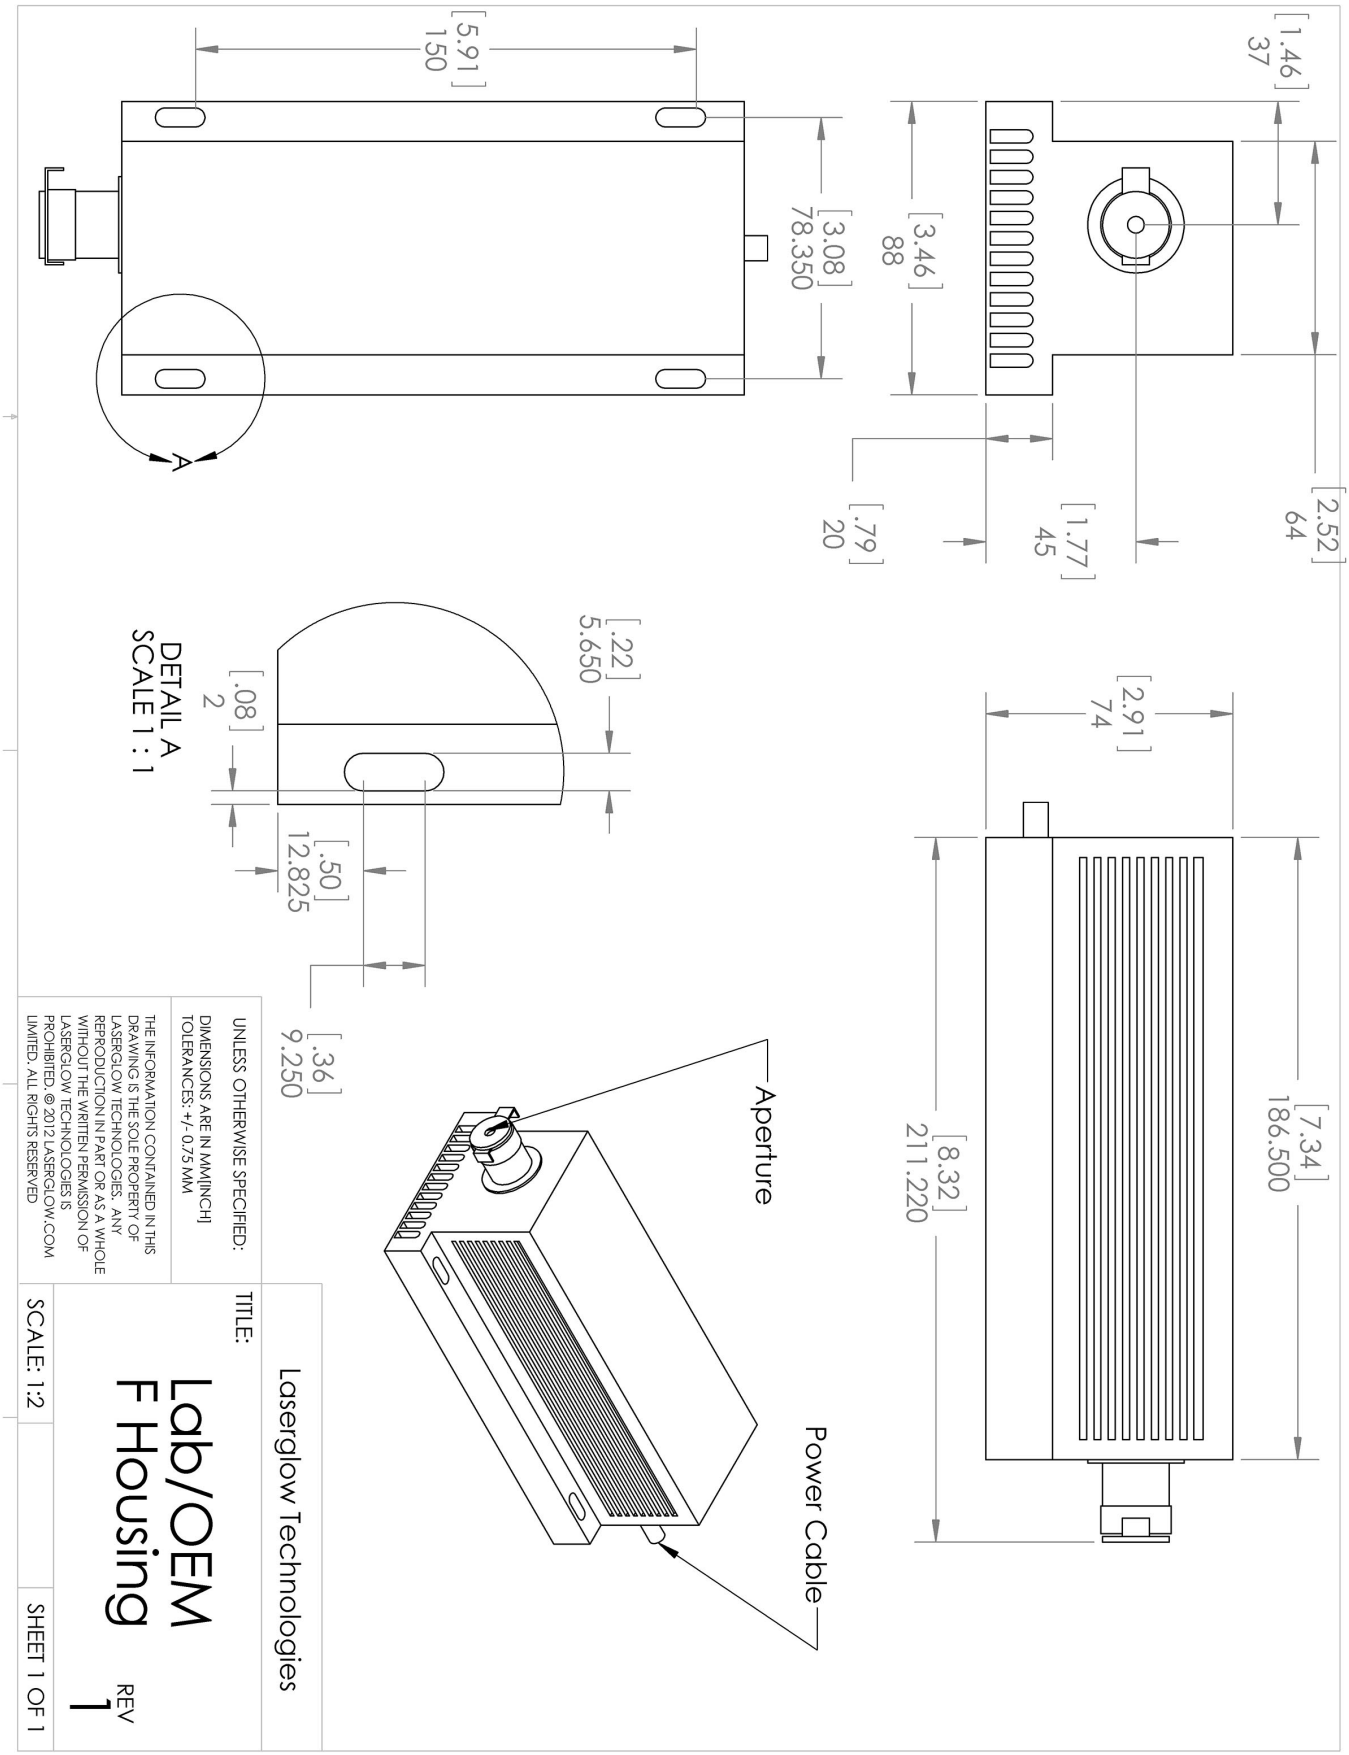

Dimensional Drawing - Power Supply Form Factor: SF:

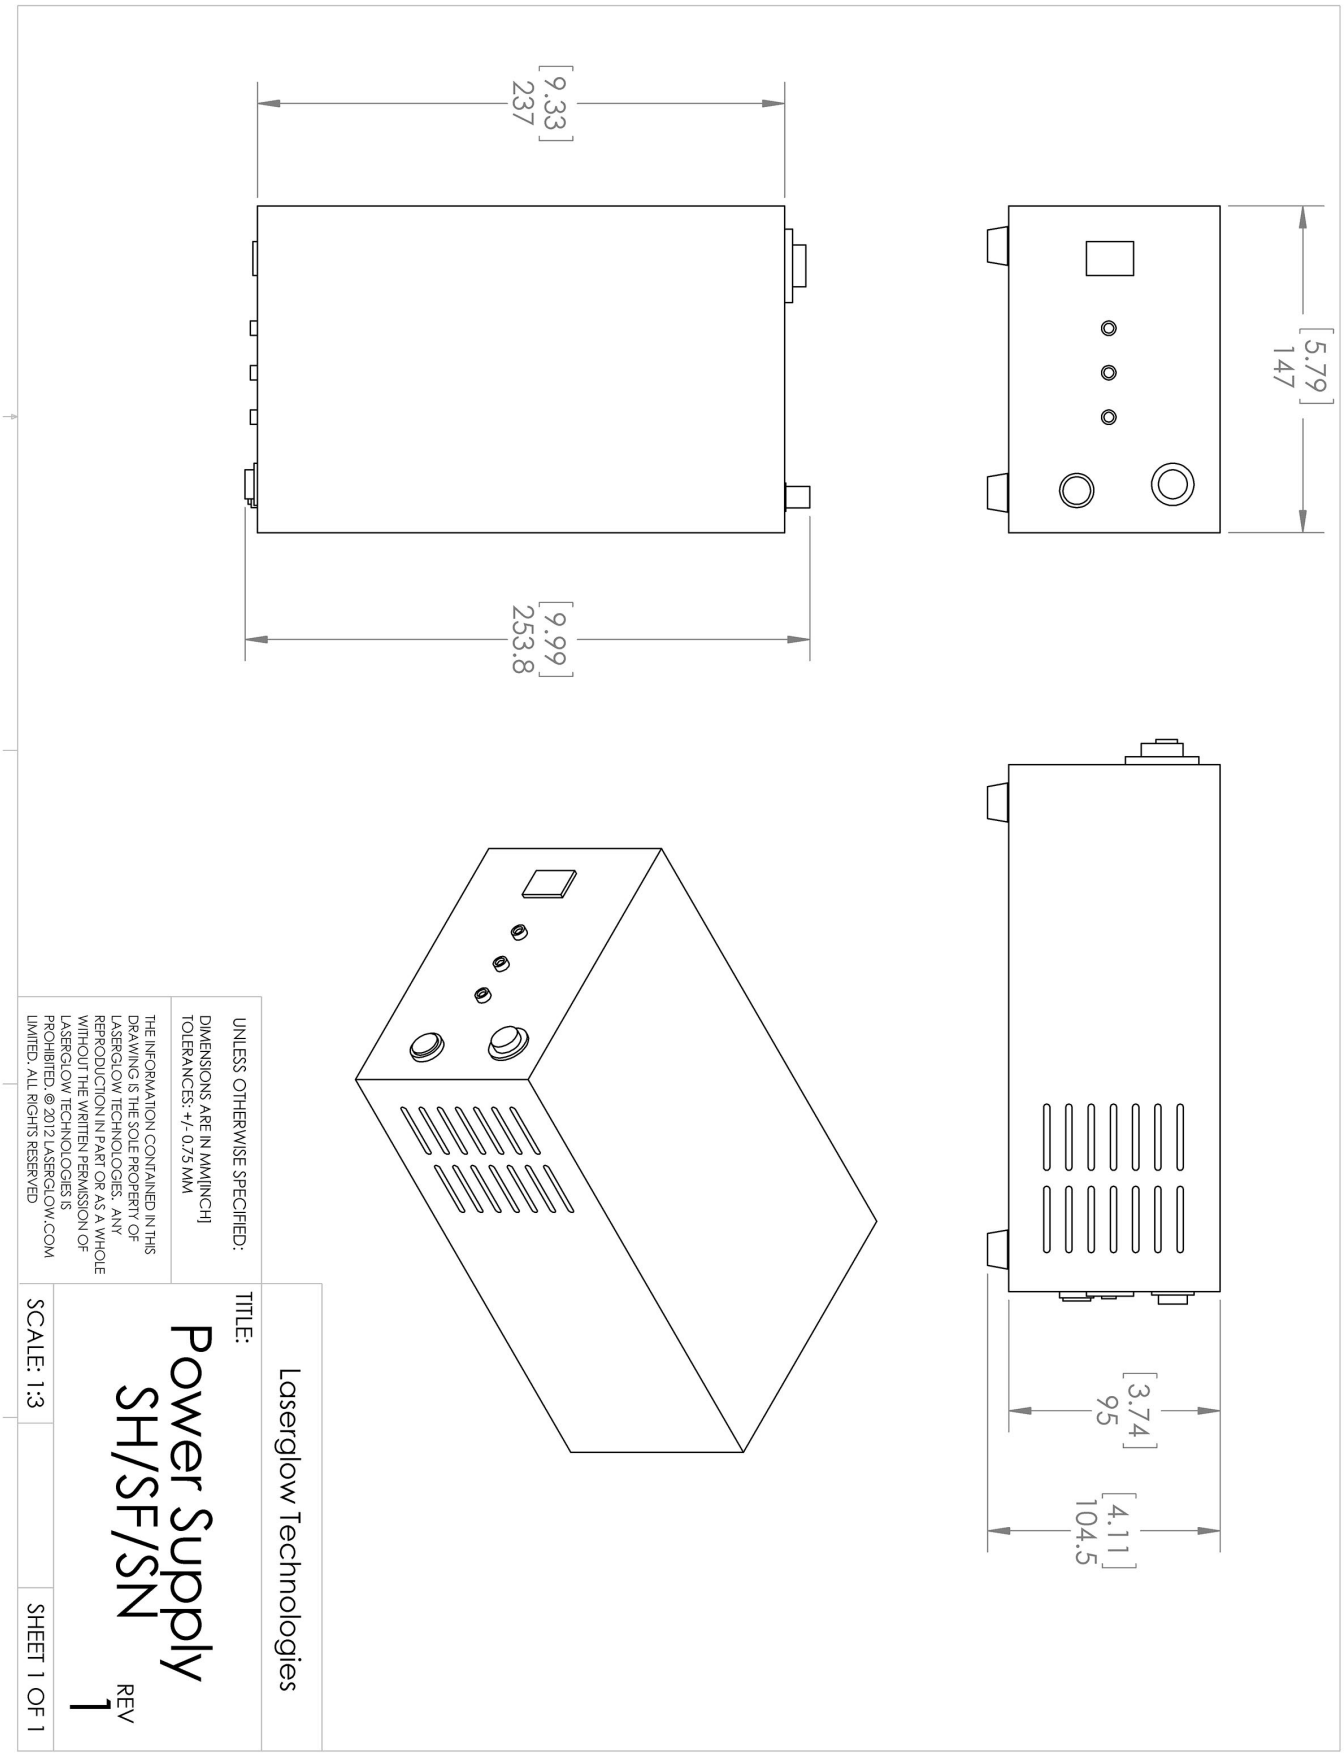

Accessories:

The most popular accessories for model R47500XSX are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

Part Number	Description	
 ACFVISHXA	FC/PC Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm) (installed and aligned) 11mm diameter input lens Full Details: www.laserglow.com/ACF	
 AFF2002XX	Armored Fiber With FC/PC Connectors 200um Core Multimode 2m length Full Details: www.laserglow.com/AFF	
 AFS2002XX	Armored Fiber With SMA 905 Connectors 200um Core Multimode 2 m length Full Details: www.laserglow.com/AFS	
 AGF5327XX	LSG-532-NF-7 Fit-Over Safety Goggles 532nm Output: OD 7+ at 190-532 nm CE Certified Full Details: www.laserglow.com/AGF	
 ACSVISHXA	SMA-905 Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm) (installed and aligned) 11mm diameter input lens Full Details: www.laserglow.com/ACS	
 TBK	Complete optics kits with breadboard mounting hardware. External modulators, variable attenuators, free-space fiber launch systems Full Details: www.laserglow.com/TBK	
 ACALBHFXX	Carrying Case-103 Holds Lab/OEM H, F and O size Standard/LabSpec laser Full Details: www.laserglow.com/ACA	Included With Laser

FOR MORE INFORMATION PLEASE CONTACT:

LASERGLOW TECHNOLOGIES
99 Ingram Dr. Unit B, North York, ON, Canada M6M2L7
Tel. (416) 729-7976 Fax (716) 322-3510
sales@laserglow.com www.laserglow.com

E&OE: Data included in this sheet may be subject to change without notice.
Please confirm critical specifications with our staff prior to ordering.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP