

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

**Artisan Technology Group**
(217) 352-9330 | sales@artisantg.com | artisantg.com

**Full-service, independent repair center**
with experienced engineers and technicians on staff.

**We buy your excess, underutilized, and idle equipment**
along with credit for buybacks and trade-ins.

**Custom engineering**
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

**Expert team | Trust guarantee | 100% satisfaction**

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

**Visit our website - *Click HERE***

# Technical data sheet
# Unpolarized retro-reflective photoelectric
Part no.: 50143108
RK46C.DL3/4P-200-M12



Figure can vary

**Contents**


- Technical data
- Dimensioned drawings
- Electrical connection
- Operation and display
- Reflectors & reflective tapes
- Part number code
- Notes
- Further information
- Accessories

# Technical data

## Basic data

| | |
|---|---|
| **Series** | 46C |
| **Operating principle** | Reflection principle |
| **Application** | Detection of irregular objects on conveyor belt |
| | Detection of polybags on conveyor belt |
| **Switching distance $S_n$** | 0 ... 1,500 mm |

## Special design

| | |
|---|---|
| **Special design** | Light-band |

## Optical data

| | |
|---|---|
| **Operating range** | 0.55 ... 1.5 m |
| **Operating range limit** | 0.55 ... 1.5 m |
| **Light source** | LED, Red |
| **LED light wavelength** | 620 nm |
| **LED group** | Exempt group (in acc. with EN 62471) |
| **Transmitted-signal shape** | Pulsed |
| **Light spot size [at sensor distance]** | 25 mm x 19 mm [1,000 mm] |
| **Type of light spot geometry** | Rectangular |

## Measurement data

| | |
|---|---|
| **Minimum object size** | 5 mm |

## Electrical data

| | |
|---|---|
| **Protective circuit** | Polarity reversal protection |
| | Short circuit protected |
| | Transient protection |

### Performance data

| | |
|---|---|
| **Supply voltage $U_B$** | 10 ... 30 V, DC, Incl. residual ripple |
| **Residual ripple** | 0 ... 15 %, From $U_B$ |
| **Open-circuit current** | 0 ... 20 mA |

### Outputs

| | |
|---|---|
| **Number of digital switching outputs** | 2 Piece(s) |

#### Switching outputs

| | |
|---|---|
| **Voltage type** | DC |
| **Switching current, max.** | 100 mA |
| **Switching voltage** | high: ≥($U_B$-2V) |
| | Low: ≤2V |

##### Switching output 1

| | |
|---|---|
| **Assignment** | Connection 1, pin 4 |
| **Switching element** | Transistor, PNP |
| **Switching principle** | Light switching |

##### Switching output 2

| | |
|---|---|
| **Assignment** | Connection 1, pin 2 |
| **Switching element** | Transistor, PNP |
| **Switching principle** | Dark switching |

## Timing

| | |
|---|---|
| **Switching frequency** | 250 Hz |
| **Response time** | 2 ms |
| **Readiness delay** | 300 ms |

### Connection 1

| | |
|---|---|
| **Function** | Signal OUT |
| | Voltage supply |
| **Type of connection** | Cable with connector |
| **Cable length** | 200 mm |
| **Sheathing material** | PUR |
| **Cable color** | Black |
| **Number of conductors** | 4 -wire |
| **Wire cross section** | 0.2 mm² |
| **Thread size** | M12 |
| **Type** | Male |
| **Material** | Plastic |
| **No. of pins** | 4 -pin |
| **Encoding** | A-coded |

## Mechanical data

| | |
|---|---|
| **Dimension (W x H x L)** | 20.5 mm x 76.3 mm x 44 mm |
| **Housing material** | Plastic, PC-PBT |
| **Lens cover material** | Plastic / PMMA |
| **Net weight** | 80 g |
| **Housing color** | Red |
| **Type of fastening** | Through-hole mounting |
| | Via optional mounting device |
| **Compatibility of materials** | ECOLAB |

## Operation and display

| | |
|---|---|
| **Type of display** | LED |
| **Number of LEDs** | 2 Piece(s) |
| **Operational controls** | Teach button |
| **Function of the operational control** | Light/dark switching |
| | Sensitivity adjustment |

## Environmental data

| | |
|---|---|
| **Ambient temperature, operation** | -40 ... 60 °C |
| **Ambient temperature, storage** | -40 ... 70 °C |

## Certifications

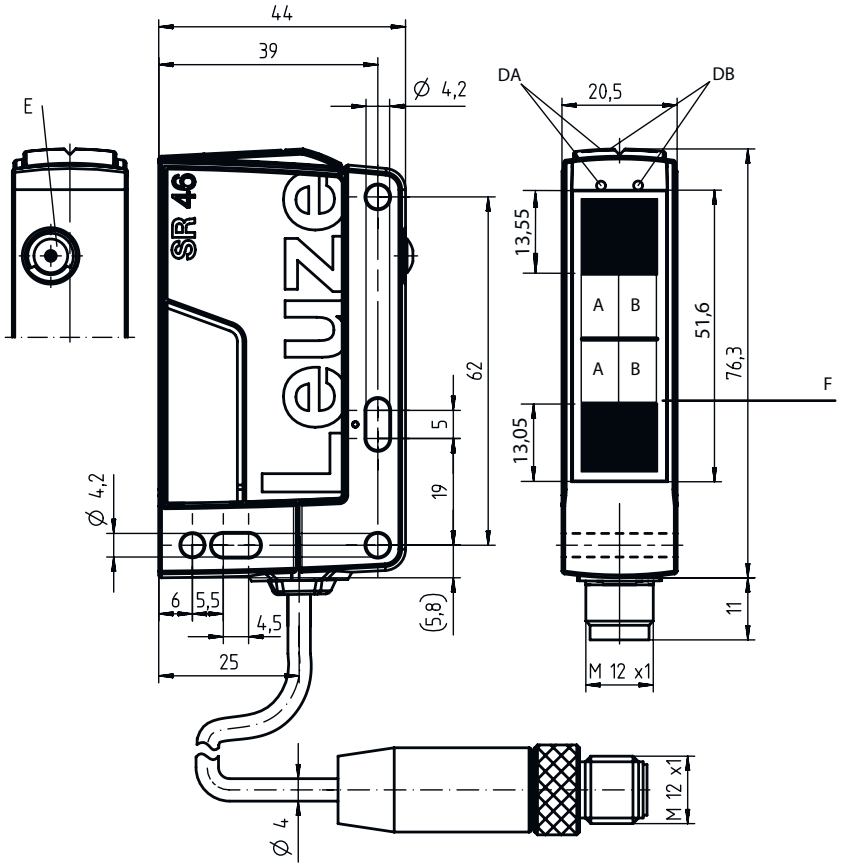
| | |
|---|---|
| **Degree of protection** | IP 67 |
| | IP 69K |
| **Protection class** | III |
| **Certifications** | c UL US |
| **Standards applied** | IEC 60947-5-2 |

## Classification

| | |
|---|---|
| **Customs tariff number** | 85365019 |
| **eCl@ss 8.0** | 27270902 |
| **eCl@ss 9.0** | 27270902 |
| **ETIM 5.0** | EC002717 |
| **ETIM 6.0** | EC002717 |

# Dimensioned drawings

All dimensions in millimeters





A Transmitter side
B Receiver side
DA Green LED
DB Yellow LED
E Teach button
F Top edge height of the conveyor belt

# Electrical connection

## Connection 1

| | |
|---|---|
| **Function** | Signal OUT |
| | Voltage supply |
| **Type of connection** | Cable with connector |
| **Cable length** | 200 mm |
| **Sheathing material** | PUR |
| **Cable color** | Black |
| **Number of conductors** | 4 -wire |
| **Wire cross section** | 0.2 mm² |
| **Thread size** | M12 |
| **Type** | Male |
| **Material** | Plastic |
| **No. of pins** | 4 -pin |
| **Encoding** | A-coded |

| Pin | Pin assignment |
|---|---|
| **1** | V+ |
| **2** | OUT 2 |
| **3** | GND |
| **4** | OUT 1 |



# Operation and display

| Display LED 1 | Display LED 2 | Meaning |
|---|---|---|
| Green, continuous light | Off | Operational readiness |
| Green, continuous light | Yellow, continuous light | Light path free |
| Green, flashing | Yellow, flashing | Teach event active |

# Reflectors & reflective tapes

| | Part no. | Designation | Operating range<br>Operating range | Description |
|---|---|---|---|---|
|  | 50143109 | BT ARH 46C.DL | 0.55 ... 1.5 m<br>0.55 ... 1.5 m | Type of article: Alignment aid for fast and reproducible alignment of RK46C. DL above the conveyor belt. For a reliable operation, the RK46C.DL should always be aligned with this alignment aid |
|  | 50108300 | REF 4-A-50x50 | 0.55 ... 1.5 m<br>0.55 ... 1.5 m | Design: Rectangular<br>Reflective surface: 50 mm x 50 mm<br>Material: Plastic<br>Chemical designation of the material: PMMA<br>Fastening: Self-adhesive |
|  | 50022816 | TKS 100X100 | 0.55 ... 1.5 m<br>0.55 ... 1.5 m | Design: Rectangular<br>Reflective surface: 96 mm x 96 mm<br>Triple reflector size: 4 mm<br>Material: Plastic<br>Base material: Plastic<br>Chemical designation of the material: PMMA8N<br>Fastening: Through-hole mounting, Adhesive |
|  | 50109257 | TKS 40x60.1 | 0.55 ... 1.5 m<br>0.55 ... 1.5 m | Design: Rectangular<br>Reflective surface: 37 mm x 56 mm<br>Triple reflector size: 2.3 mm<br>Material: Plastic<br>Base material: Plastic<br>Chemical designation of the material: PMMA8N<br>Fastening: Through-hole mounting, Adhesive |
|  | 50022814 | TKS 50X50 | 0.55 ... 1.5 m<br>0.55 ... 1.5 m | Design: Rectangular<br>Reflective surface: 47 mm x 48 mm<br>Triple reflector size: 4 mm<br>Material: Plastic<br>Base material: Plastic<br>Chemical designation of the material: PMMA8N<br>Fastening: Through-hole mounting, Adhesive |

# Part number code

Part designation: **AAA46C d EE-f.GG H/i J-K**

| | |
|---|---|
| **AAA46C** | **Operating principle / construction**<br>HT46C: diffuse reflection sensor with background suppression<br>LS46C: throughbeam photoelectric sensor transmitter<br>LE46C: throughbeam photoelectric sensor receiver<br>PRK46C: retro-reflective photoelectric sensor with polarization filter<br>RK46C: retro-reflective photoelectric sensor |
| **d** | **Light type**<br>n/a: red light<br>I: infrared light |
| **EE** | **Light source**<br>n/a: LED<br>L1: laser class 1<br>L2: laser class 2 |
| **f** | **Preset range (optional)**<br>n/a: operating range acc. to data sheet<br>xxxF: preset range [mm] |

# Part number code

| | |
|---|---|
| **GG** | **Equipment**<br>n/a: standard<br>1: 270° potentiometer<br>8: activation input (activation with high signal)<br>01: diffuse reflection sensor with background suppression (HT): HG tape (HighGain tape) is not detected from a distance of 900 mm with a set operating range of ≤ 450 mm (diffuse reflection: 6%, black)<br>D: depolarizing media<br>E: diffuse reflection sensor with background suppression (HT): optimized for dusty environments<br>SL: diffuse reflection sensor with background suppression (HT): slit diaphragm 25 mm x 3 mm<br>P: throughbeam photoelectric sensor receiver (LE): edge filter for parallel operation<br>L: Light-band<br>XL: extra long light spot |
| **H** | **Operating range adjustment & version**<br>n/a with diffuse reflection sensor with background suppression (HT): range adjustment via mechanical adjusting spindle<br>n/a with retro-reflective photoelectric sensors (PRK): operating range not adjustable<br>1: retro-reflective photoelectric sensors (PRK/RK): sensitivity adjustment via potentiometer<br>3: teach-in via button<br>P2: resolution 2 mm |
| **i** | **Switching output/function OUT 1/IN: Pin 4 or black conductor**<br>2: NPN transistor output, light switching<br>N: NPN transistor output, dark switching<br>4: PNP transistor output, light switching<br>P: PNP transistor output, dark switching<br>L: IO-Link |
| **J** | **Switching output / function OUT 2/IN: pin 2 or white conductor**<br>2: NPN transistor output, light switching<br>N: NPN transistor output, dark switching<br>4: PNP transistor output, light switching<br>P: PNP transistor output, dark switching<br>8: activation input (activation with high signal)<br>9: deactivation input (deactivation with high signal)<br>W: warning output<br>X: pin not used |
| **K** | **Electrical connection**<br>n/a: cable, standard length 2000 mm, 4-wire<br>200-M12: cable, length 200 mm with M12 connector, 4-pin, axial (plug)<br>M12: M12 connector, 4-pin (plug) |

**Note**

- A list with all available device types can be found on the Leuze website at

# Notes

**Observe intended use!**

- This product is not a safety sensor and is not intended as personnel protection.
- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.

**For UL applications:**

- For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

# Further information

- Light source: Average life expectancy 100,000 h at an ambient temperature of 25 °C
- Rating voltage 50 V
- Detection range: Depending on the object size and the set sensor sensitivity
- Temperature compensation ±15°C
- Response time: For short decay times, an ohmic load of approx. 5 kOhm is recommended

# Accessories

## Connection technology - Connection cables

| | Part no. | Designation | Article | Description |
|---|---|---|---|---|
|  | 50130652 | KD U-M12-4A-V1-050 | Connection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 4 -pin<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5,000 mm<br>Sheathing material: PVC |
|  | 50130690 | KD U-M12-4W-V1-050 | Connection cable | Connection 1: Connector, M12, Angled, Female, A-coded, 4 -pin<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5,000 mm<br>Sheathing material: PVC |

## Mounting technology - Mounting brackets

| | Part no. | Designation | Article | Description |
|---|---|---|---|---|
|  | 50105315 | BT 46 | Mounting device | Design of mounting device: Angle, L-shape<br>Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Screw type<br>Type of mounting device: Rigid<br>Material: Metal |

## Mounting technology - Rod mounts

| | Part no. | Designation | Article | Description |
|---|---|---|---|---|
|  | 50117252 | BTU 300M-D12 | Mounting system | Design of mounting device: Mounting system<br>Fastening, at system: For 12 mm rod, Sheet-metal mounting<br>Mounting bracket, at device: Screw type, Suited for M4 screws<br>Type of mounting device: Clampable, Adjustable, Turning, 360°<br>Material: Metal |
|  | 50128380 | BTU 460M-D12 | Mounting system | Design of mounting device: Mounting system<br>Fastening, at system: For 12 mm rod<br>Mounting bracket, at device: Screw type<br>Type of mounting device: Adjustable, Turning, 360°<br>Material: Metal |

# Accessories

## Standard reflectors

| | Part no. | Designation | Article | Description |
|---|---|---|---|---|
|  | 50143109 | BT ARH 46C.DL | Alignment aid | Type of article: Alignment aid for fast and reproducible alignment of RK46C.DL above the conveyor belt. For a reliable operation, the RK46C.DL should always be aligned with this alignment aid |
|  | 50109257 | TKS 40x60.1 | Reflector | Design: Rectangular<br>Reflective surface: 37 mm x 56 mm<br>Triple reflector size: 2.3 mm<br>Material: Plastic<br>Base material: Plastic<br>Chemical designation of the material: PMMA8N<br>Fastening: Through-hole mounting, Adhesive |
|  | 50022814 | TKS 50X50 | Reflector | Design: Rectangular<br>Reflective surface: 47 mm x 48 mm<br>Triple reflector size: 4 mm<br>Material: Plastic<br>Base material: Plastic<br>Chemical designation of the material: PMMA8N<br>Fastening: Through-hole mounting, Adhesive |

| Note |
|---|
| A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page. |

**Artisan Technology Group** is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP