

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*



SWITCHERS

The *world's largest* manufacturer of high power switching regulated power supplies—whose only product line is high power switchers—announces

The NEW "MIGHTY MITES"

(MM) Series *

The most dramatic and revolutionary breakthrough ever made in the power supply industry.

- **Most comprehensive line of switchers ever developed** — one, two, three, four, five and six outputs.
- **Most watts/in.^{3}** — up to 2.26 watts/in.^{3} — more than 2 times denser than competitive switchers; 5 to 6 times denser than conventional linears.
- **Most efficient** — up to 80% efficient.
- **Most economical** — less than 60¢/watt in quantity.

*Patent Pending

- **Most reliable** — only LH Research guarantees all models for two years.
- **Most modular** — any pc board may be removed and re-installed in less than two minutes.
- **Smallest size** — 5V - 75 amp model is only 5" x 4" x 12"; 5V - 150 amp 5" x 5" x 12.75".
- **Lightest weight** — up to 62 watts/lb.
- **All models designed to meet UL 478.**

LH "MIGHTY MITES"

16 models with the most advanced specs in the industry.

Efficiency
Up to 80%.

Input
115VAC ±10% 47-63 Hz.
or 230VAC ±10% 47-63 Hz.
115/230VAC ±10% 47-63 Hz optional.

Output
(see listings under individual models)
Any output between 2 volts and 70 volts available. Contact factory.

Line Regulation
0.4% on primary output over entire input range.
0.2% on 2nd, 3rd and 4th.

Load Regulation
0.4% from no load to full load.

Note: Multiple output supplies require a minimum of 10% load on main output to maintain voltage on minor outputs.

Interaction
0.1% maximum.

Ripple and Noise
1% P-P or 50 MV.

Over-voltage Protection
Standard on primary output, factory set at 125% ±5%. OVP available for other outputs as an option.

Overshoot and Undershoot
2% maximum deviation for a 25% load change at 5A/μs.

Response Time
200 μs to 1% after a 25% load change at 5A/μs.

Drop Out Time
Supply will remain in regulation for 15 ms after removal of nominal AC power.


Current Limit
All outputs have "fold-back" current limiting. Constant current limiting available as an option.

Temperature Coefficient
±.02%/°C.

Storage Temperature
−55°C to 85°C.

Operating Temperature
0°C to 70°C (see derating curve).

Power Derating Curve

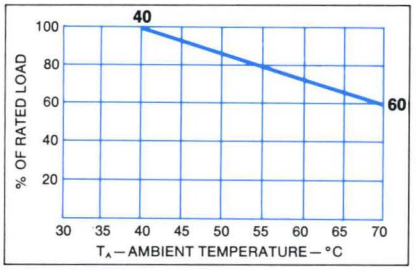

Minimum Load
Zero for single output models; 10% on primary output for multiple output models.

Output Polarity
Single output models:
Either output terminal may be grounded or left floating up to 100V off chassis ground.

Multiple output models:
Outputs of these supplies are floating and independent and may be referenced as desired up to 100V off chassis ground.

Input Connections
AC input is provided through a heavy duty non-breakable terminal block.

Output Connections
Primary outputs that have ratings up to 375 watts use nickel plated ¼ x 20 studs. Primary outputs that have ratings up to 750 watts have nickel plated 5/16 x 18 studs. Other outputs on multiple supplies are provided through a heavy duty non-breakable terminal block.

Output Adjustment
All outputs have voltage adjustment potentiometers accessible from the front panel. Current limit and OVP adjustments are internal and factory set.

Standard Features

- *Remote sense on primary outputs.* Compensation for up to 250 MV load cable loss can be accommodated. Remote sense is also provided on 2nd and 3rd outputs of 2 and 3 output supplies.
- *Internal thermal switch.* Will turn off the power supply in case of overheating.
- *Input RFI line filter.* Independent LC section on each side of the AC line.
- *Reverse voltage protection.* All outputs have reverse voltage protection up to 100% of rated current on primary outputs. 3 amps average on all other outputs.
- *Limited inrush current.* AC input inrush current is limited to 2½ times normal running current when averaged over one cycle.
- *Automatic internal sensing.* Internal sensing is automatic through resistors if the sense lines are opened.

Optional Features

- *Power fail detection.* Upon AC removal, power fail signal will drop to a logic zero at least 10 ms before loss of DC output. This signal is referenced to the (−) output stud.
- *Remote on-off.* The power supply output(s) can be activated by customer supplied switch or transistor circuit. (Consult factory for further details.)
- *Master/slave parallel.* Up to 10 single output units can be paralleled. Advantages are: current sharing between units to within 10%. Voltage adjustment made at master unit. All supplies switch at the same frequency.
- *Straight paralleling.* (no master) Single output supplies are available with constant current overload to allow reliable turn on when units are to be used in straight parallel.
- *Special AC inputs.* Units can be built with wider AC input ranges to give added protection against brown out.
- *DC inputs.* Most MM Series units can be configured for 28, 48, and 120 VDC.

Look how the "Mighty Mites" compare against competitive switchers.*

	ACDC	ACME	H-P	PIONEER	POWERTECH	SORENSON	TRIO	LH
Power/Watts	500	500	500	500	600	500	500	750
Cost	$595	$605	$650	$595	$625	$650	$650	$590
Size (in.³)	523	397	507	480	400	525	461	331
Cost/Watt**	$1.19	$1.21	$1.30	$1.19	$1.04	$1.30	$1.30	$.78
Watt/in.³	.96	1.25	.98	1.04	1.5	.95	1.08	2.26


*Specifications and prices based on published information. **Based on single unit price.

MM-300 One output, 750 watts

5V, 150 amps
12V, 62 amps
15V, 50 amps
18V, 41 amps
24V, 31 amps

Price $590.00, 1 to 9 supplies



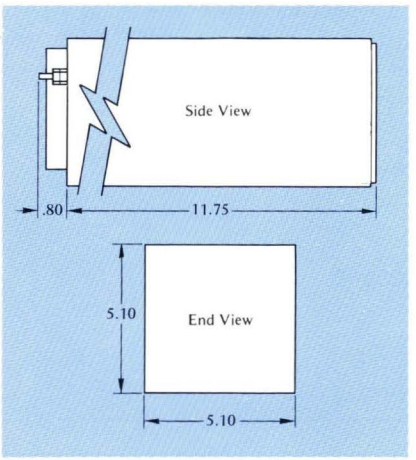

MM-420 Two outputs, 750 watts


Primary voltage:
5V, 150 amps

2nd voltage: (these voltages also available at twice the current ratings shown).
2V, 12 amps
5V, 12 amps
12V, 10 amps
15V, 10 amps
18V, 8 amps
24V, 5 amps

Total wattage of all outputs not to exceed 750 watts

Price $650.00, 1 to 9 supplies



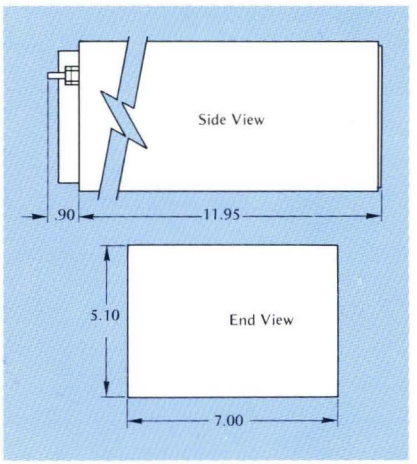

MM-430 Three outputs, 750 watts

Primary voltage:
5V, 150 amps

2nd and 3rd voltages:
± 5V, 12 amps
±12V, 10 amps
±15V, 10 amps
±18V, 8 amps
±24V, 5 amps

Total wattage of all outputs not to exceed 750 watts

Price $695.00, 1 to 9 supplies

MM-440 Four outputs, 750 watts

Primary voltage:
5V, 150 amps

2nd voltage:
2V, 12 amps
5V, 12 amps
12V, 10 amps
15V, 10 amps
18V, 8 amps
24V, 5 amps

3rd and 4th voltages:
5V, 5 amps
12V, 5 amps
15V, 5 amps
18V, 4 amps
24V, 3 amps

Total wattage of all outputs not to exceed 750 watts

Price $745.00, 1 to 9 supplies

MM-450 Five outputs, 750 watts

Primary voltage:
5V, 150 amps

2nd, 3rd, 4th and 5th voltages, any combination of the following:
5V, 5 amps
12V, 5 amps
15V, 5 amps
18V, 4 amps
24V, 3 amps

Total wattage of all outputs not to exceed 750 watts

Price $775.00, 1 to 9 supplies

Prices and specifications are subject to change without notice.


MM-520 "Dual" — Two 375 - watt outputs, 750 watts total

No. 1 and No. 2 primary voltages, any combination of the following:

2V, 75 amps	15V, 25 amps
5V, 75 amps	18V, 21 amps
12V, 31 amps	24V, 15 amps

Price $750.00, 1 to 9 supplies



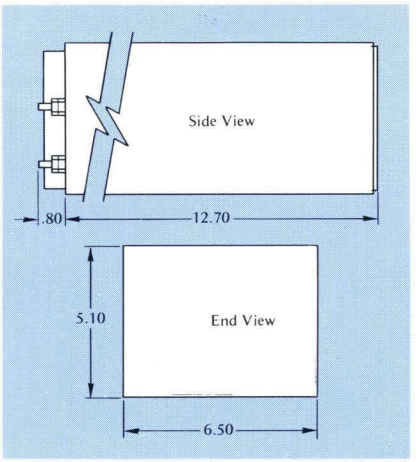

MM-630 Three outputs, 750 watts: 2 high power and 1 low power

No. 1 and No. 2 primary voltages, any combination of the following:

2V, 75 amps	12V, 31 amps
5V, 75 amps	15V, 25 amps

3rd voltage*: (these voltages also available at twice the current ratings shown)


2V, 12 amps	15V, 10 amps
5V, 12 amps	18V, 8 amps
12V, 10 amps	24V, 5 amps

Total wattage of all outputs not to exceed 750 watts

*Third voltage plus the No. 1 primary cannot exceed 375 watts.

Price $810.00, 1 to 9 supplies



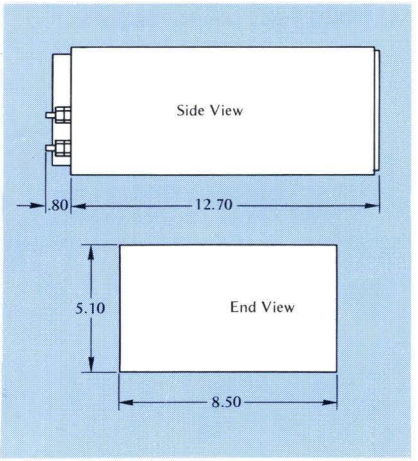

MM-640 Four outputs: 2 high power and 2 low power, 750 watts total

No. 1 and No. 2 primary voltages, any combination of the following:

2V, 75 amps	12V, 31 amps
5V, 75 amps	15V, 25 amps

3rd and 4th voltages*, any combination of the following:

2V, 12 amps	15V, 10 amps
5V, 12 amps	18V, 8 amps
12V, 10 amps	24V, 5 amps

Total wattage of all outputs not to exceed 750 watts

*Combination of third voltage and the No. 1 primary cannot exceed 375 watts.

*Combination of fourth voltage and the No. 2 primary cannot exceed 375 watts.

Price $855.00, 1 to 9 supplies

MM-650 Five outputs: 2 high power and 3 low power, 750 watts total

No. 1 and No. 2 primary voltages, any combination of the following:

2V, 75 amps	12V, 31 amps
5V, 75 amps	15V, 25 amps

3rd voltage*:

2V, 12 amps	15V, 10 amps
5V, 12 amps	18V, 8 amps
12V, 10 amps	24V, 5 amps

4th and 5th voltages*, any combination of the following:

5V, 5 amps	18V, 4 amps
12V, 5 amps	24V, 3 amps
15V, 5 amps	

Total wattage of all outputs not to exceed 750 watts

*Combination of third voltage and the No. 1 primary cannot exceed 375 watts.

*Combination of fourth and fifth voltages and the No. 2 primary cannot exceed 375 watts.

Price $905.00, 1 to 9 supplies

MM-660 Six outputs: 2 high power and 4 low power, 750 watts total

No. 1 and No. 2 primary voltages, any combination of the following:

2V, 75 amps	12V, 31 amps
5V, 75 amps	15V, 25 amps

3rd, 4th, 5th and 6th voltages*, any combination of the following:

5V, 5 amps	18V, 1 amp
12V, 5 amps	24V, 1 amp
15V, 5 amps	

Total wattage of all outputs not to exceed 750 watts

*Combination of third and fourth voltages and the No. 1 primary cannot exceed 375 watts.

*Combination of fifth and sixth voltages and the No. 2 primary cannot exceed 375 watts.

Price $935.00, 1 to 9 supplies


Prices and specifications are subject to change without notice.

MM-100 One output, 375 watts

5V, 75 amps
12V, 31 amps
15V, 25 amps
18V, 21 amps
24V, 15 amps

Price $445.00, 1 to 9 supplies



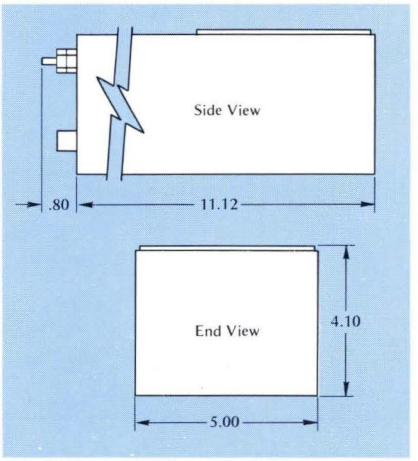

MM-220 Two outputs, 375 watts


Primary voltage:
5V, 75 amps

2nd voltage:
2V, 12 amps
5V, 12 amps
12V, 10 amps
15V, 10 amps
18V, 8 amps
24V, 5 amps

Total wattage of all outputs not to exceed 375 watts

Price $495.00, 1 to 9 supplies



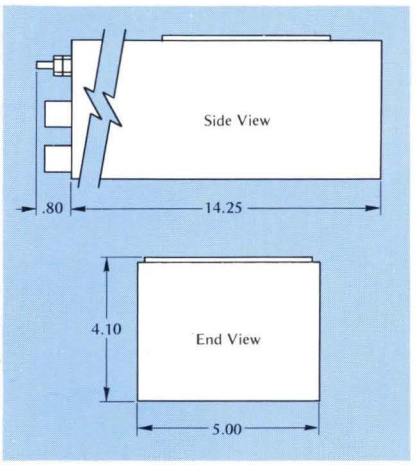

MM-230 Three outputs, 375 watts

Primary voltage:
5V, 75 amps

2nd and 3rd voltages:
±12V, 8 amps
±15V, 8 amps
±18V, 6 amps

Total wattage of all outputs not to exceed 375 watts

Price $530.00, 1 to 9 supplies

MM-240 Four outputs, 375 watts

Primary voltage:
5V, 75 amps

2nd voltage:
2V, 12 amps
5V, 12 amps
12V, 10 amps
15V, 10 amps
18V, 8 amps
24V, 5 amps

3rd and 4th voltages, any combination of the following:
5V, 5 amps
12V, 3 amps
15V, 3 amps
18V, 2 amps
24V, 2 amps

Total wattage of all outputs not to exceed 375 watts

Price $565.00, 1 to 9 supplies

MM-250 Five outputs, 375 watts

Primary voltage:
5V, 75 amps

2nd, 3rd, 4th and 5th voltages, any combination of the following:
2V, 5 amps
5V, 5 amps
12V, 3 amps
15V, 3 amps
18V, 3 amps
24V, 2 amps

Total wattage of all outputs not to exceed 375 watts

Price $595.00, 1 to 9 supplies

Prices and specifications are subject to change without notice.

MM-730 "Flat Pak" — Three outputs, 375 watts

Primary voltage:
5V, 75 amps


2nd and 3rd voltages:

± 2V, 12 amps	±15V, 10 amps
± 5V, 12 amps	±18V, 8 amps
±12V, 10 amps	±24V, 5 amps

Total wattage of all outputs not to exceed 375 watts

Price $530.00, 1 to 9 supplies



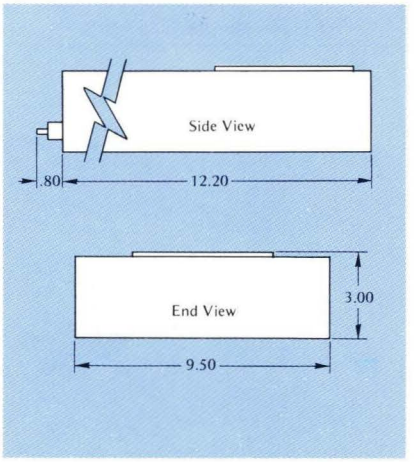

How to order MM Series Switchers

MM X X X — X — X X X X X — X

- MM — Series
- X X X — Model Number
- X — No. 1 Primary Voltage (See Table I.)
- X — No. 2 Primary Voltage (See Table I. If no No. 2 primary voltage leave X.)
- X — Second Output Voltage*
- X — Third Output Voltage*
- X — Fourth Output Voltage*
- X — Fifth Output Voltage*
- X — Sixth Output Voltage*
- X — Option Letter Designation (See Table II.)

*For *each* output which needs over-voltage protection (where it is not standard) add the letter Y immediately following the output voltage code, i.e. 1Y, 3Y, etc.

TABLE I.
OUTPUT VOLTAGE CODE

0=2 VOLTS	3=15 VOLTS
1=5 VOLTS	4=18 VOLTS
2=12 VOLTS	5=24 VOLTS

TABLE II.
OPTION ORDER CODE

O=REMOTE ON-OFF
P=POWER-FAIL DETECTION
C=CONSTANT CURRENT LIMITING

Typical example: MM 661 — 1 — 1Y2Y3Y5-P

The above Model Number describes a MM 660 Series Switcher with

a 5-Volt No. 1 primary output voltage,
a 5-Volt No. 2 primary output voltage,
a 5-Volt second output voltage with over-voltage protection,
a 12-Volt third output voltage with over-voltage protection,
a 15-Volt fourth output voltage with over-voltage protection,
a 24-Volt fifth output voltage *without* over-voltage protection,
and the power-fail detection option.

LH RESEARCH

L H Research, Inc., 2052 S. Grand Ave., Santa Ana, Calif. 92705 • (714) 546-5279

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP