

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*



5704 Series

HYBRID STEPPER MOTOR

Features and Benefits:

- Extremely High Resolution
- High Torque and Inertia

Specifications:

- NEMA 23 (2.250 in) Frame Size
- 0.45° Step Angle
- 1.73 to 2.17 in Length
- 75.05 to 140.2 oz-in Holding Torque


Find The Right Motor

Models

MODEL #	NEMA SIZE	FRAME SIZE	STEP ANGLE	CONNECTION TYPE	LENGTH, IN	CURRENT AMP	HOLDING TORQUE, OZ-IN	RESISTANCE	INERTIA, OZ-IN²	WEIGHT, LBS	# OF LEADS	AVAILABILITY
5704M-02	NEMA 23	2.250 in	0.45°	Bipolar	2.170 in	1.8 AMP	140.2 oz-in	3.1	2.1 oz-in²	1.501 lbs	4	Quote
5704M-03	NEMA 23	2.250 in	0.45°	Bipolar	2.170 in	3 AMP	140.2 oz-in	1.2	2.1 oz-in²	1.501 lbs	4	Quote
5704M-10	NEMA 23	2.250 in	0.45°	Bipolar	2.170 in	0.9 AMP	140.2 oz-in	11.7	2.1 oz-in²	1.501 lbs	4	Quote
5704X-01	NEMA 23	2.250 in	0.45°	Bipolar	1.730 in	1.5 AMP	75.05 oz-in	3	1 oz-in²	1.052 lbs	4	Quote
5704X-02	NEMA 23	2.250 in	0.45°	Bipolar	1.730 in	1.8 AMP	75.05 oz-in	2	1 oz-in²	1.052 lbs	4	Quote
5704X-10	NEMA 23	2.250 in	0.45°	Bipolar	1.730 in	0.9 AMP	75.05 oz-in	9.6	1 oz-in²	1.052 lbs	4	Quote
5704X-15	NEMA 23	2.250 in	0.45°	Bipolar	1.730 in	2.5 AMP	75.05 oz-in	1.3	1 oz-in²	1.052 lbs	4	Quote


Torque Curves

- [x] 5704M-02
- [x] 5704M-03
- [x] 5704M-10
- [x] 5704X-01
- [x] 5704X-02
- [x] 5704X-10
- [x] 5704X-15

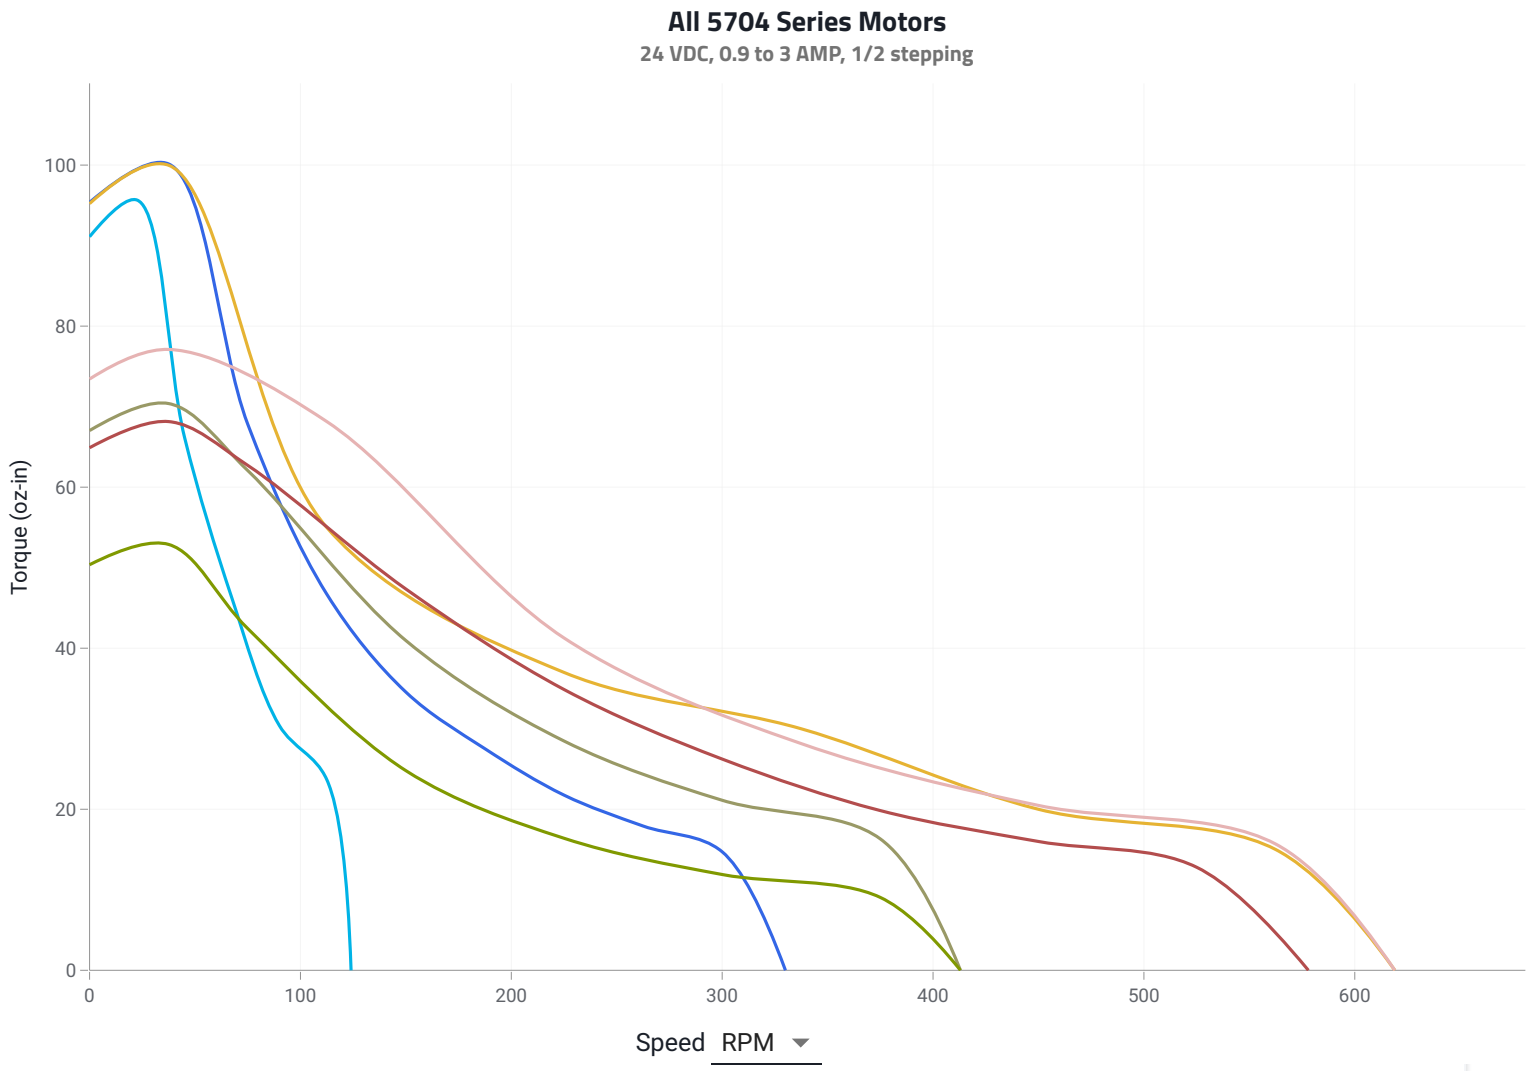

Dimensions

MODEL	DIM. A (LENGTH) IN
5704M-02	2.170 in
5704M-03	2.170 in
5704M-10	2.170 in
5704X-01	1.730 in
5704X-02	1.730 in
5704X-10	1.730 in
5704X-15	1.730 in

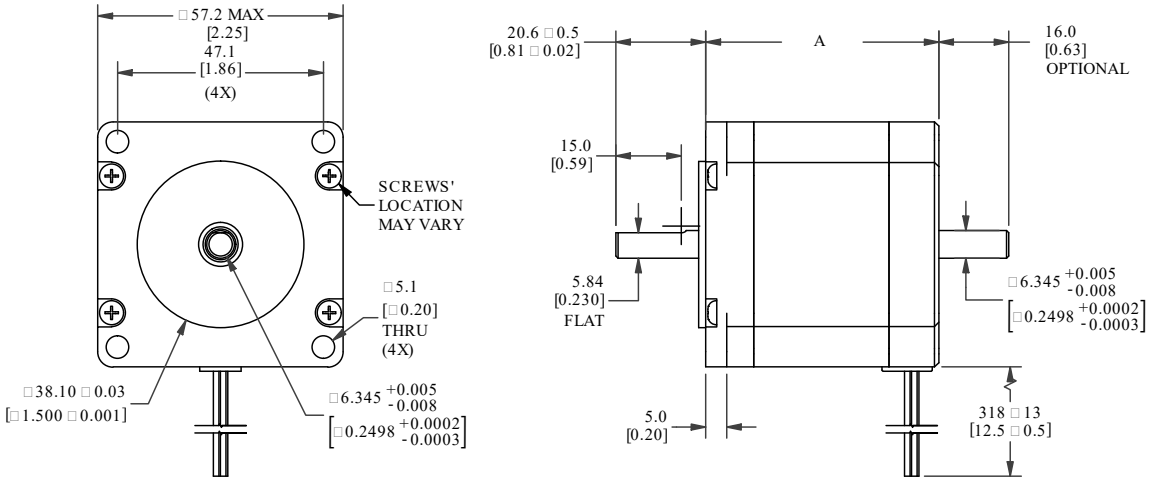

Operating Specifications

Radial Play	0.001 in @ 1 lbs
End Play	0.003 in @ 3 lbs
Shaft Run Out	0.002 TIR
Concentricity of Mounting Pilot to Shaft	0.003 TIR
Perpendicularity of Mounting Pilot to Face	0.003 TIR
Max Radial Load at Dimension "K" from mounting face	15 lbs
Dimension "K"	0.550 in
Max Axial Load	13 lbs
Maximum Case Temperature	176.00 °F maximum
Ambient Temperature	-4 °F to 122.00 °F
Storage Temperature	-4 °F to 212.00 °F
Humidity Range (%)	85% or less, non-condensing
Magnet Wire Insulation	Class B 130 deg C
Insulation Resistance	100M Ohm at 500 VDC
Dielectric Strength	500 VDC for 1 min

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP