



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT


Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

LSI22915A SCSI Host Adapter

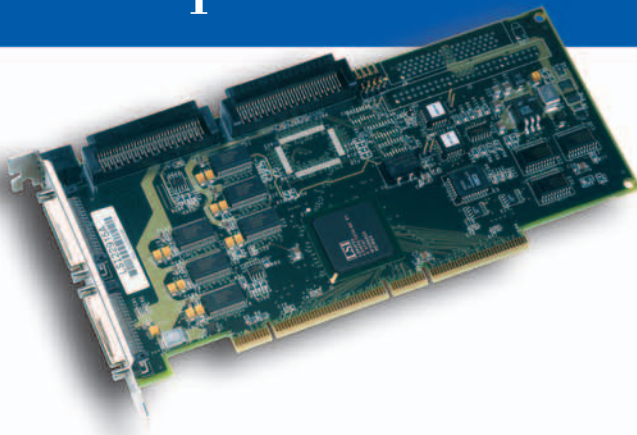

KEY APPLICATIONS

- Mid to high-end servers
- Cluster environments

PLATFORMS

- Intel

FEATURES

- High performance Ultra160 SCSI speeds with two external and internal Ultra160 connectors
- SureLINK™ domain validation technology ensures data integrity
- Supports all major operating systems with SDMS software
- Supports one-button disaster recovery for tape drives for instant data recovery
- 5 year limited warranty

PCI Bus:

64-bit, 66 MHz PCI

SCSI Bus:

16-bit LVD or Single-ended

SCSI Performance:

Ultra160 (160 MBps)

SCSI Connector Config:

Internal: (2) 68-pin HD

External: (2) 68-pin VHDCI

Max No of SCSI Devices:

30

The LSI22915A Ultra160 SCSI host adapter offers the highest Ultra160 SCSI performance with two internal and external channels.

DELIVER HIGH PERFORMANCE CONNECTIVITY TO YOUR ENTERPRISE APPLICATIONS!

When developing enterprise storage solutions, the LSI22915A PCI-to-Dual Channel Ultra160 SCSI host adapter is the ideal choice. Two independent Ultra160 SCSI channels allow for up to 30 external and/or internal devices to be attached at once for high performance and flexibility. This greater connectivity makes the LSI22915A adapter ideal for connecting JBODs, RAID, hard disk drives for high speed storage applications.

This adapter provides the advanced features necessary to ensure reliable Ultra160 system operation and meets the data transfer requirements of emerging system technologies. It includes LSI Logic SureLINK domain validation technology, available exclusively from LSI Logic, which ensures data integrity by intelligently testing the network before completing negotiation.

WARRANTY

For more than 15 years, LSI Logic host adapters have been providing high-performance SCSI solutions to leading server, disk array and computer systems worldwide. Each host adapter carries a powerful chip built in LSI Logic's ISO 9001-certified fabrication facilities. Using only the highest quality components, LSI Logic host adapters are assembled and tested in world-class facilities to assure superior product reliability and performance. Because of stringent quality management programs, our host adapters carry a five-year limited warranty.

LSI22915A ULTRA160 SCSI ORDERING INFORMATION

LSI22915A

Supports Intel platforms

LSI22915A SCSI Host Adapter

Technical Specifications

PCI Bus	64-bit, 66 MHz max	
PCI Modes	Bus master DMA	
PCI Data Burst Transfer Rate	132 MB/second (32-bit bus @ 33 MHz) 264 MB/second (64-bit bus @ 33 MHz) 528 MB/second (64-bit bus @ 66 MHz)	
PCI Card Type	Universal add-in card (3.3V and 5.0V signaling)	
PCI Voltage	+5V ±5%	
PCI Form Factor	4.2" x 8.4"	
PCI Power	15 Watts, 1.5A @ +5VDC	
Bracket	ISA/EISA and low profile option	
Certification Level	PCI 2.2, PC 99 compliant	
SCSI Bus	Wide Ultra160, LVD (Low Voltage Differential) and SE (Single-Ended)	
SCSI Processor	LSI53C1010	
Connectors	External	Internal
Channel A Channel B	68-pin VHDCI 68-pin VHDCI	68-pin HD 68-pin HD
Termination	Universal (LVD/SE) termination Automatic cable detection Software disable Jumper disable option	
Termination Power	Self resetting 1.5A fuse per channel	
LED Indicators	4-pin header for off-board LEDs	
BIOS Flash Memory	128K x 8 flash EEPROM	
Subsystem ID	SVID – 1000h SSID – 1010h	
Environments	Operating	Storage
Temperature	0°C to 55°C	-40°C to +105°C
Relative Humidity	5 to 90% non-condensing	5 to 90% non-condensing
MTBP	>400,000 hours	
Compliances	CE, VCCI, C-Tick, FCC class B, UL 94VO	

Software Support

OS Support	Versions
Windows	95, 98, Me, NT4.0, SP4 and above, 2000, 2000 SP1 and XP
Linux	2.2 and 2.4 kernels
NetWare	4.11, 4.2 and 5.X
UnixWare	2.12 and 7.X
SCO Unix	5.X
OS/2	3.0 or greater
Solaris	X86 versions 2.6, 2.7, and 2.8
Sun Solaris	Versions 2.8 and greater, Open Boot PROM version 3.0 and greater
Utilities	Install, Flash, SCSI format, BIOS configuration, and NT configuration
Domain Validation	Windows NT, 2000 and XP/levels 1, 2, and 3
Data Protection	CRC and AIP
Device Support	OBDR (Tape Booting) and Bootable CD-ROM

For more information please visit the LSI Logic web site at:

<http://storageio.lsillogic.com>

LSI Logic Corporation

North American Headquarters
Milpitas, CA
Tel: 866 574 5741

Host Adapters Group
Southborough, MA
Tel: 888 429 0425
FAX: 508 485 0303

LSI Logic Europe Ltd.

European Headquarters
United Kingdom
Tel: 44 1344 426544
Fax: 44 1344 481039

LSI Logic KK Headquarters

Tokyo, Japan
Tel: 81 3 5463 7165
Fax 81 3 5463 7820

ISO 9000 Certified

LSI Logic logo design, SDMS and SureLINK are trademarks or registered trademarks of LSI Logic Corporation. All other brand and product names may be trademarks of their respective companies.

LSI Logic Corporation reserves the right to make changes to any products and services herein at any time without notice. LSI Logic does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by LSI Logic; nor does the purchase, lease, or use of a product or service from LSI Logic convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual property rights of LSI Logic or of third parties.

Copyright ©2001 by LSI Logic Corporation.
All rights reserved.

Order No. S20004
6/01-1M – Printed in USA



The
Communications
Company™



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com