ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

**Artisan Technology Group**
(217) 352-9330 | sales@artisantg.com | artisantg.com

**Full-service, independent repair center**
with experienced engineers and technicians on staff.

**We buy your excess, underutilized, and idle equipment**
along with credit for buybacks and trade-ins.

**Custom engineering**
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

**Expert team | Trust guarantee | 100% satisfaction**

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Measurement Computing USB-488* at our website: ***Click HERE***

# USB-488

## USB-to-IEEE-488.2 GPIB Interface




## Features

The USB-488 is an IEEE 488.2 standard USB interface, and is supported under popular Microsoft® Windows® operating systems and LabVIEW™.

The USB-488 has the following features:

- Complete Talker/Listener/Controller functionality
- Controls up to 14 GPIB instruments
- USB 2.0 full-speed compliant – 12 Mb/s
- Data transfer rates up to 880 kB/s
- Built-in 2 m USB cable
- No GPIB cable required to connect to the first instrument
- Compact and lightweight
- Compatible with USB 1.1

The USB-488 interface converts any USB personal computer into an instrumentation control and data acquisition system.

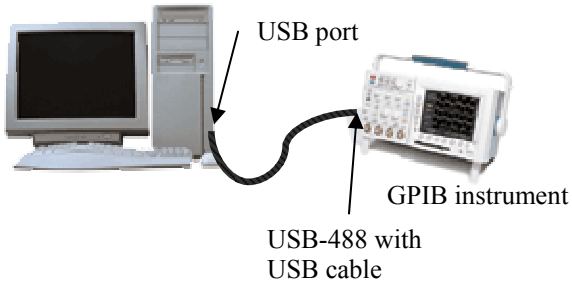


## Other resources

- The *GPIB-488 Software and Product Information* booklet explains how to install the software on the GPIB-488 software CD. This booklet is on the root of the software CD in GettingStartedGuide.pdf.
- The *GPIB-488 Programming Reference Manual* explains how to program the PCI-488 using the GPIB library software included with the board. This manual is installed with the software to the root folder in GPIBProgrammingReferenceManual.pdf.
- Support: Phone - (508) 946-5100
  Fax (508) 946-9500
  Email - info@measurementcomputing.com

## Specifications

### USB

| | |
|---|---|
| Full-speed USB 2.0 signaling | 12 Mb/s |

### IEEE 488 compatibility


Compatible with IEEE 488.1 and IEEE 488.2.

### Maximum IEEE 488 bus transfer rate

| | |
|---|---|
| Standard IEEE 488 handshake | 880 kB/s |

### LED indicators

- **READY** LED – Lights up when the USB is configured.
- **ACTIVE** LED – Lights up when the USB is active.




### Power consumption

| | |
|---|---|
| USB self-powered device | |
| Maximum power consumption | 200 mA |

### Physical dimensions

10.7 cm (L) x 6.6 cm (W) x 2.6 cm (H)
(4.2 in. x 2.6 in. x 1.0 in.)

### I/O Connectors

| | |
|---|---|
| GPIB | IEEE 488 standard 24-pin |
| USB | USB standard series A plug |

### Environment

- Operating specifications:

| | |
|---|---|
| Ambient temperature | 0 to 55 °C |
| Relative humidity | 10 to 90%, noncondensing |

- Storage specifications:

| | |
|---|---|
| Ambient temperature | -20 to 70 °C |
| Relative humidity | 5 to 95%, noncondensing |



Copyright © Measurement Computing Corporation

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**Artisan Technology Group** is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP