

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.


Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

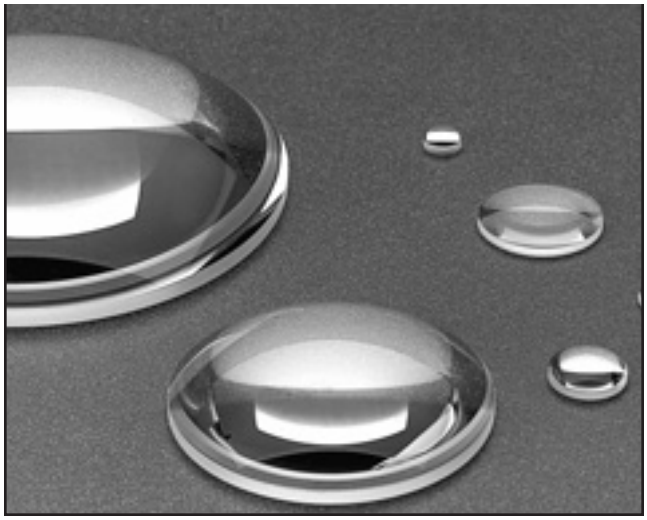


Available in:
✔**Production Quantities**
✔**Custom Sizes**

Plano-Convex Glass Lenses

Plano-convex lenses are used in many applications including telescopes, collimators, magnifiers, radiometers, optical transceivers, and condensers. These lenses have a plane and a convex surface.

- Positive focal lengths are used to converge incident light.
- These lenses form both real images (as might be focused on a piece of paper) and virtual images (as seen through the lens if they are used as a magnifier).
- They closely approach best-form for infinite and near-infinite conjugate ratios, with the preferred focal plane adjacent to the plano surface.
- A selection of pre-mounted lenses in a cell holder is available. Call for details.
- Antireflection coatings can be ordered by appending the appropriate coating suffix as described in Chapter 5, *Optical Coatings*.

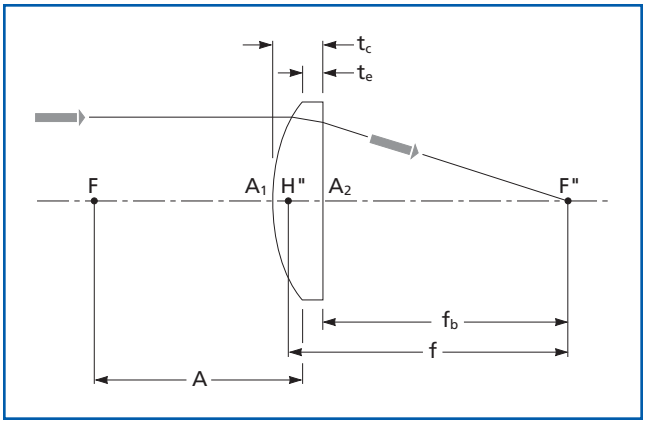

01 LPX plano-convex glass lenses

SPECIFICATIONS: PLANO-CONVEX GLASS LENSES

Paraxial Focal Length (f): ±2%, except 400 series ±5%

Design Index (n_0): ±0.001 (±0.002 for LaSFN 9)

Centration: 3 arc minutes

Diameter (ϕ): +0, −0.10 mm (+0, −0.15 mm for $\phi \geq 75$ mm)

Clear Aperture: 90% of central diameter

Center Thickness (t_c): ±0.2 mm


Materials: See table (LaSFN 9, BaK 1, BK7)

Surface Quality: Pitch polished, 60–40 scratch and dig

Circumference is ground and both edges have a slight protective bevel (except for diameters ≤5.0 mm).

/078 HEBBAR™ COATING

The Melles Griot /078 HEBBAR™ coating is ideal for use with plano convex lenses. The broadband AR coating reduces surface reflections across a large spectral band. Average reflectance is 0.4% between 415 and 700 nm.

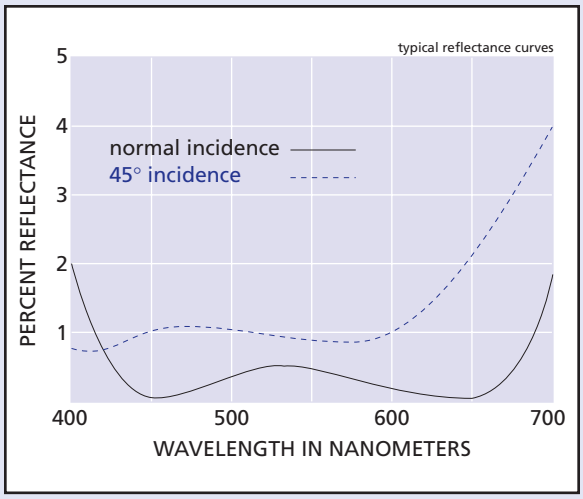

Plano-Convex Glass Lenses

f (mm)	ϕ (mm)	Glass Type	Design Wavelength λ_0 (nm)	Design Index n_0	t_c (mm)	t_e (mm)	A_2H'' (mm)	f_b (mm)	A (mm)	f/#	PRODUCT NUMBER
1.0	1.5	LaSFN9	587.6	1.8502	0.8	0.3	– 0.43	0.57	1.45	0.67	01 LPX 401
1.2	2.0	LaSFN9	587.6	1.8502	0.9	0.1	– 0.43	0.77	2.02	0.60	01 LPX 407
1.6	2.5	LaSFN9	587.6	1.8502	0.9	0.1	– 0.43	1.17	2.42	0.64	01 LPX 413
2.5	2.8	LaSFN9	587.6	1.8502	1.5	1.0	– 0.95	1.55	3.63	0.89	01 LPX 415
3.5	3.6	BaK1	587.6	1.5725	2.0	0.9	– 1.27	2.23	4.62	0.97	01 LPX 421
4.0	4.2	BaK1	587.6	1.5725	1.9	0.5	– 1.21	2.79	5.38	0.95	01 LPX 423
6.0	4.0	BK7	587.6	1.5168	1.5	0.8	– 0.99	5.01	6.73	1.50	01 LPX 427
8.0	4.0	BK7	546.1	1.5187	2.5	2.0	– 1.60	6.15	8.50	2.00	01 LPX 001
10.0	5.0	BK7	546.1	1.5186	2.6	2.0	– 1.70	8.30	10.60	2.00	01 LPX 003
10.0	8.0	BK7	546.1	1.5187	3.9	2.0	– 2.60	7.40	11.90	1.25	01 LPX 005
12.5	7.5	BK7	587.6	1.5168	2.2	1.0	– 1.50	11.00	13.70	1.67	01 LPX 435
12.7	6.3	BK7	546.1	1.5187	2.8	2.0	– 1.80	10.90	13.50	2.02	01 LPX 007
13.0	7.5	BK7	546.1	1.5187	2.0	0.9	– 1.32	11.70	14.10	1.73	01 LPX 008
15.0	8.0	BK7	546.1	1.5187	3.1	2.0	– 2.00	13.00	16.10	1.88	01 LPX 009
15.0	10.0	BK7	546.1	1.5187	3.8	2.0	– 2.50	12.50	16.80	1.50	01 LPX 011
17.0	6.0	BK7	546.1	1.5187	2.5	2.0	– 1.60	15.40	17.50	2.83	01 LPX 013
18.0	8.0	BK7	546.1	1.5187	2.9	2.0	– 1.90	16.10	18.90	2.25	01 LPX 015
18.0	15.0	BK7	546.1	1.5187	5.7	1.9	– 3.80	14.20	21.80	1.20	01 LPX 017
20.0	10.0	BK7	546.1	1.5187	3.3	2.0	– 2.20	17.80	21.30	2.00	01 LPX 019
20.0	12.0	BK7	546.1	1.5187	3.9	2.0	– 2.60	17.40	21.90	1.67	01 LPX 021
21.0	15.0	BK7	546.1	1.5187	5.0	2.0	– 3.30	17.70	24.00	1.40	01 LPX 023
22.0	9.0	BK7	546.1	1.5187	2.9	2.0	– 1.90	20.10	22.90	2.44	01 LPX 025
22.0	10.0	BK7	546.1	1.5187	3.1	1.9	– 2.00	20.00	23.20	2.20	01 LPX 027
25.0	12.0	BK7	546.1	1.5187	3.5	2.0	– 2.30	22.70	26.50	2.08	01 LPX 029
25.0	14.0	BK7	546.1	1.5187	4.0	1.9	– 2.60	22.40	27.10	1.79	01 LPX 035
25.4	6.3	BK7	546.1	1.5187	2.4	2.0	– 1.60	23.80	25.80	4.03	01 LPX 037
25.4	25.4	BK7	546.1	1.5187	11.4	1.7	– 7.50	17.90	35.10	1.00	01 LPX 041
26.0	13.5	BK7	546.1	1.5187	3.8	2.0	– 2.50	23.50	27.80	1.93	01 LPX 043
28.6	12.7	BK7	546.1	1.5187	3.4	2.0	– 2.20	26.40	30.00	2.25	01 LPX 045
30.0	11.7	BK7	546.1	1.5187	3.2	2.1	– 2.10	27.90	31.10	2.56	01 LPX 047
30.0	18.5	BK7	546.1	1.5187	5.0	2.0	– 3.30	26.70	33.00	1.62	01 LPX 049
31.7	25.4	BK7	546.1	1.5187	7.9	1.9	– 5.20	26.50	37.70	1.25	01 LPX 055
32.7	15.8	BK7	546.1	1.5187	3.9	1.9	– 2.60	30.10	34.70	2.07	01 LPX 057
34.0	22.0	BK7	546.1	1.5187	5.8	1.9	– 3.80	30.20	37.90	1.55	01 LPX 061

Melles Griot can reduce (edge) diameters of all lenses to meet your requirements.

(continued)

Plano-Convex Glass Lenses *(continued)*

f (mm)	ϕ (mm)	Glass Type	Design Wavelength λ_0 (nm)	Design Index n_0	t_c (mm)	t_e (mm)	A_2H'' (mm)	f_b (mm)	A (mm)	f/#	PRODUCT NUMBER
35.0	20.0	BK7	546.1	1.5187	4.2	1.2	– 2.80	32.20	38.00	1.75	01 LPX 063
35.0	30.0	BK7	546.1	1.5187	9.9	2.0	– 6.50	28.50	42.90	1.17	01 LPX 064
36.0	15.0	BK7	546.1	1.5187	3.6	2.0	– 2.40	33.60	37.60	2.40	01 LPX 065
38.1	12.7	BK7	546.1	1.5187	3.0	2.0	– 2.00	36.10	39.10	3.00	01 LPX 067
40.0	10.0	BK7	546.1	1.5187	2.6	2.0	– 1.70	38.30	40.60	4.00	01 LPX 079
40.0	20.0	BK7	546.1	1.5187	4.5	1.9	– 3.00	37.00	42.60	2.00	01 LPX 081
40.0	22.4	BK7	546.1	1.5187	5.3	2.0	– 3.50	36.50	43.30	1.79	01 LPX 083
40.0	30.0	BK7	546.1	1.5187	8.4	2.0	– 5.50	34.50	46.40	1.33	01 LPX 084
43.0	13.0	BK7	546.1	1.5187	3.0	2.0	– 2.00	41.00	44.00	3.31	01 LPX 085
44.5	12.7	BK7	546.1	1.5187	2.4	1.5	– 1.60	42.90	45.40	3.50	01 LPX 087
47.0	11.0	BK7	546.1	1.5187	2.6	2.0	– 1.70	45.30	47.60	4.27	01 LPX 101
50.0	6.6	BK7	587.6	1.5168	2.1	1.9	– 1.40	48.60	50.20	7.58	01 LPX 441
50.0	15.0	BK7	546.1	1.5187	3.1	2.0	– 2.00	48.00	51.10	3.33	01 LPX 105
50.0	20.0	BK7	546.1	1.5187	4.0	2.0	– 2.60	47.40	52.00	2.50	01 LPX 107
50.0	25.0	BK7	546.1	1.5187	5.7	1.9	– 3.63	46.37	53.63	2.00	01 LPX 106
50.0	27.0	BK7	546.1	1.5187	5.8	2.0	– 3.80	46.20	53.80	1.85	01 LPX 108
50.0	30.0	BK7	546.1	1.5187	6.8	2.0	– 4.50	45.50	54.80	1.67	01 LPX 110
50.0	40.0	BK7	546.1	1.5187	11.3	1.9	– 7.40	42.60	59.40	1.25	01 LPX 111
50.8	25.4	BK7	546.1	1.5187	5.2	1.9	– 3.40	47.40	54.10	2.00	01 LPX 113
50.8	38.1	BK7	546.1	1.5187	10.0	1.9	– 6.60	44.20	58.90	1.33	01 LPX 115
55.0	10.0	BK7	546.1	1.5187	2.4	2.0	– 1.60	53.40	55.40	5.50	01 LPX 119
60.0	22.4	BK7	546.1	1.5187	4.1	2.0	– 2.70	57.30	62.10	2.68	01 LPX 123
60.0	30.0	BK7	546.1	1.5187	5.8	1.9	– 3.80	56.20	63.90	2.00	01 LPX 125
60.0	42.0	BK7	546.1	1.5187	10.1	1.9	– 6.70	53.30	68.20	1.43	01 LPX 127
60.0	47.0	BK7	546.1	1.5187	12.6	1.9	– 8.30	51.70	70.70	1.28	01 LPX 129
63.5	25.4	BK7	546.1	1.5187	4.5	2.0	– 3.00	60.50	66.00	2.50	01 LPX 133
63.5	38.1	BK7	587.6	1.5168	8.0	1.9	– 5.30	58.20	69.60	1.67	01 LPX 135
68.0	5.1	BK7	546.1	1.5187	2.0	1.9	– 1.30	66.70	68.10	13.33	01 LPX 443
70.0	30.0	BK7	546.1	1.5187	5.2	2.0	– 3.40	66.60	73.20	2.33	01 LPX 137
70.0	40.0	BK7	546.1	1.5187	7.9	1.9	– 5.20	64.80	76.00	1.75	01 LPX 139
70.0	60.0	BK7	546.1	1.5187	18.6	2.7	– 12.20	57.80	85.90	1.71	01 LPX 141
75.0	60.0	BK7	546.1	1.5187	17.0	2.9	– 11.20	63.80	89.10	1.25	01 LPX 142
76.2	25.4	BK7	546.1	1.5187	4.1	2.0	– 2.70	73.50	78.30	3.00	01 LPX 143
76.2	50.8	BK7	546.1	1.5187	12.1	2.9	– 8.00	68.20	85.40	1.50	01 LPX 145
80.0	15.0	BK7	546.1	1.5187	2.7	2.0	– 1.80	78.20	80.70	5.33	01 LPX 147

Melles Griot can reduce (edge) diameters of all lenses to meet your requirements.

(continued)

Plano-Convex Glass Lenses *(continued)*

f (mm)	ϕ (mm)	Glass Type	Design Wavelength λ_0 (nm)	Design Index n_0	t_c (mm)	t_e (mm)	A_2H'' (mm)	f_b (mm)	A (mm)	f/#	PRODUCT NUMBER
80.0	22.4	BK7	546.1	1.5187	3.5	2.0	– 2.30	77.70	81.50	3.57	01 LPX 149
80.0	30.0	BK7	546.1	1.5187	4.8	2.0	– 3.20	76.80	82.80	2.67	01 LPX 153
80.0	42.0	BK7	546.1	1.5187	7.7	2.0	– 5.10	74.90	85.70	1.90	01 LPX 155
80.0	50.0	BK7	546.1	1.5187	10.4	2.0	– 6.80	73.20	88.50	1.60	01 LPX 157
85.0	35.0	BK7	546.1	1.5187	5.6	2.0	– 3.70	81.30	88.60	2.43	01 LPX 159
90.0	40.0	BK7	546.1	1.5187	6.5	2.0	– 4.30	85.70	94.50	2.25	01 LPX 163
95.0	50.0	BK7	546.1	1.5187	9.7	2.9	– 6.40	88.60	101.80	1.90	01 LPX 167
100.0	15.0	BK7	546.1	1.5187	2.5	2.0	– 1.60	98.40	100.50	6.67	01 LPX 169
100.0	22.4	BK7	546.1	1.5187	3.2	2.0	– 2.10	97.90	101.20	4.46	01 LPX 177
100.0	25.0	BK7	546.1	1.5187	4.0	2.8	– 2.16	97.73	101.20	4.00	01 LPX 175
100.0	30.0	BK7	546.1	1.5187	4.2	2.0	– 2.80	97.20	102.20	3.33	01 LPX 178
100.0	40.0	BK7	546.1	1.5187	6.0	2.0	– 4.00	96.00	104.00	2.50	01 LPX 179
100.0	52.0	BK7	546.1	1.5187	9.9	2.9	– 6.50	93.50	107.00	1.92	01 LPX 181
100.0	60.0	BK7	546.1	1.5187	12.5	2.9	– 8.20	91.80	109.60	1.67	01 LPX 183
100.0	80.0	BK7	546.1	1.5187	21.6	2.8	– 14.20	85.80	118.80	1.25	01 LPX 187
105.0	25.0	BK7	546.1	1.5187	3.4	1.9	– 2.20	102.80	106.50	4.20	01 LPX 198
110.0	30.0	BK7	546.1	1.5187	4.0	2.0	– 2.60	107.40	112.00	3.67	01 LPX 201
120.0	30.0	BK7	546.1	1.5187	3.8	2.0	– 2.50	117.50	121.80	4.00	01 LPX 207
120.0	60.0	BK7	546.1	1.5187	10.6	2.9	– 7.00	113.00	127.70	2.00	01 LPX 209
120.0	80.0	BK7	546.1	1.5187	17.4	2.8	– 11.50	108.50	134.60	1.50	01 LPX 211
120.8	100.0	BK7	546.1	1.5187	28.8	3.6	– 19.00	101.00	145.20	1.20	01 LPX 215
125.0	30.0	BK7	546.1	1.5187	3.7	1.9	– 2.40	122.60	126.80	4.17	01 LPX 217
127.0	25.4	BK7	546.1	1.5187	3.2	2.0	– 2.10	124.90	128.20	5.00	01 LPX 219
127.0	50.8	BK7	546.1	1.5187	8.0	2.9	– 5.30	121.70	132.10	2.50	01 LPX 221
127.0	76.2	BK7	546.1	1.5187	15.0	2.9	– 9.90	117.10	139.10	1.67	01 LPX 223
135.0	25.0	BK7	546.1	1.5168	3.1	2.0	– 2.00	133.00	136.10	5.40	01 LPX 229
140.0	77.0	BK7	546.1	1.5187	13.9	2.9	– 9.20	130.80	151.00	1.82	01 LPX 235
150.0	22.4	BK7	546.1	1.5187	2.8	2.0	– 1.80	148.20	150.80	6.70	01 LPX 237
150.0	25.0	BK7	546.1	1.5187	4.0	3.2	– 2.60	147.40	150.80	6.00	01 LPX 236
150.0	30.0	BK7	546.1	1.5187	3.5	2.0	– 2.30	147.70	151.50	5.00	01 LPX 238
150.0	42.0	BK7	546.1	1.5187	4.9	2.0	– 3.20	146.80	152.90	3.57	01 LPX 239
150.0	52.0	BK7	546.1	1.5187	7.4	2.9	– 4.90	145.10	154.40	2.88	01 LPX 241
150.0	60.0	BK7	546.1	1.5187	9.0	3.0	– 5.90	144.10	156.00	2.50	01 LPX 242
150.0	80.0	BK7	546.1	1.5187	14.0	2.9	– 9.20	140.80	161.10	1.87	01 LPX 243
150.0	105.0	BK7	546.1	1.5187	24.2	3.8	– 15.90	134.10	170.40	1.43	01 LPX 245

Melles Griot can reduce (edge) diameters of all lenses to meet your requirements.

(continued)

Plano-Convex Glass Lenses *(continued)*

f (mm)	ϕ (mm)	Glass Type	Design Wavelength λ_0 (nm)	Design Index n_0	t_c (mm)	t_e (mm)	A_2H'' (mm)	f_b (mm)	A (mm)	f/#	PRODUCT NUMBER
152.4	25.4	BK7	546.1	1.5187	3.0	2.0	– 2.00	150.40	153.40	6.00	01 LPX 247
152.4	50.8	BK7	546.1	1.5187	7.2	3.0	– 4.70	147.70	156.60	3.00	01 LPX 249
160.0	10.0	BK7	546.1	1.5187	2.1	1.9	– 1.40	158.60	160.20	16.00	01 LPX 255
160.0	29.0	BK7	546.1	1.5187	3.3	2.0	– 2.20	157.80	161.30	5.52	01 LPX 257
177.0	50.8	BK7	546.1	1.5187	6.6	3.0	– 4.30	172.70	180.60	3.48	01 LPX 259
185.0	75.0	BK7	546.1	1.5187	10.6	3.0	– 7.00	178.00	192.60	2.47	01 LPX 263
196.0	15.0	BK7	546.1	1.5187	2.3	2.0	– 1.50	194.50	196.30	13.07	01 LPX 265
200.0	22.4	BK7	546.1	1.5187	2.6	2.0	– 1.70	198.30	200.60	8.93	01 LPX 267
200.0	25.0	BK7	546.1	1.5187	4.0	3.4	– 2.63	197.37	200.60	8.00	01 LPX 266
200.0	30.0	BK7	546.1	1.5187	3.1	2.0	– 2.00	198.00	201.10	6.67	01 LPX 268
200.0	40.0	BK7	546.1	1.5187	3.9	2.0	– 2.60	197.40	201.90	5.00	01 LPX 269
200.0	50.0	BK7	546.1	1.5187	6.0	2.9	– 4.00	196.00	203.10	4.00	01 LPX 277
200.0	77.0	BK7	546.1	1.5187	10.3	2.9	– 6.80	193.20	207.40	2.60	01 LPX 279
200.0	90.0	BK7	546.1	1.5187	13.2	2.9	– 8.70	191.30	210.30	2.22	01 LPX 280
200.0	130.0	BK7	546.1	1.5187	26.6	3.7	– 17.50	182.50	222.90	1.54	01 LPX 281
250.0	25.0	BK7	546.1	1.5187	4.0	3.5	– 2.63	247.37	250.50	10.00	01 LPX 293
250.0	30.0	BK7	546.1	1.5187	2.9	2.0	– 1.90	248.10	250.90	8.33	01 LPX 282
250.0	42.0	BK7	546.1	1.5187	3.7	2.0	– 2.40	247.60	251.70	5.95	01 LPX 285
250.0	50.0	BK7	546.1	1.5187	4.4	2.0	– 2.90	247.10	252.40	5.00	01 LPX 286
250.0	140.0	BK7	546.1	1.5187	24.3	3.8	– 16.00	234.00	270.50	1.79	01 LPX 283
250.0	145.0	BK7	546.1	1.5187	25.9	3.7	– 17.10	232.90	272.20	1.72	01 LPX 289
254.0	50.8	BK7	546.1	1.5187	5.5	3.0	– 3.60	250.40	256.50	5.00	01 LPX 301
254.0	101.6	BK7	546.1	1.5187	14.1	3.9	– 9.30	244.70	264.20	2.50	01 LPX 303
300.0	47.0	BK7	546.1	1.5187	3.8	2.0	– 2.50	297.50	301.80	6.38	01 LPX 305
300.0	66.0	BK7	546.1	1.5187	6.5	3.0	– 4.30	295.70	303.50	4.55	01 LPX 307
300.0	95.0	BK7	546.1	1.5187	10.4	3.0	– 6.80	293.20	307.40	3.16	01 LPX 309
330.0	145.0	BK7	546.1	1.5187	20.0	3.9	– 13.20	316.80	346.10	2.28	01 LPX 311
400.0	25.0	BK7	546.1	1.5187	2.4	2.0	– 1.60	398.40	400.40	16.00	01 LPX 313
450.0	145.0	BK7	546.1	1.5187	15.5	4.0	– 10.20	439.80	461.50	3.10	01 LPX 336
500.0	25.0	BK7	546.1	1.5187	2.3	2.0	– 1.50	498.50	500.30	20.00	01 LPX 319
500.0	30.0	BK7	546.1	1.5187	2.4	2.0	– 1.60	498.40	500.40	16.67	01 LPX 318
500.0	50.0	BK7	546.1	1.5187	3.2	2.0	– 2.10	497.90	501.20	10.00	01 LPX 322
600.0	42.0	BK7	546.1	1.5187	2.7	2.0	– 1.80	598.20	600.70	14.29	01 LPX 323
600.0	95.0	BK7	546.1	1.5187	6.6	3.0	– 4.30	595.70	603.60	6.32	01 LPX 327
700.0	25.0	BK7	546.1	1.5187	2.2	2.0	– 1.40	689.60	700.20	28.00	01 LPX 329

Melles Griot can reduce (edge) diameters of all lenses to meet your requirements.

(continued)

Plano-Convex Glass Lenses *(continued)*

f (mm)	ϕ (mm)	Glass Type	Design Wavelength λ_0 (nm)	Design Index n_0	t_c (mm)	t_e (mm)	A_2H'' (mm)	f_b (mm)	A (mm)	f/#	PRODUCT NUMBER
700.0	30.0	BK7	546.1	1.5187	2.3	2.0	–1.50	689.60	700.30	23.33	01 LPX 331
700.0	50.0	BK7	546.1	1.5187	2.9	2.0	–1.90	698.10	700.90	14.00	01 LPX 332
800.0	30.0	BK7	546.1	1.5187	2.3	2.0	–1.50	789.50	800.30	26.67	01 LPX 341
800.0	50.0	BK7	546.1	1.5187	2.8	2.0	–1.80	796.20	800.80	16.00	01 LPX 343
1000.0	25.0	BK7	546.1	1.5187	2.1	1.9	–1.40	998.60	1000.20	40.00	01 LPX 333
1000.0	30.0	BK7	546.1	1.5187	2.2	2.0	–1.40	998.60	1000.20	33.33	01 LPX 345
1000.0	47.0	BK7	546.1	1.5187	2.5	2.0	–1.60	998.40	1000.50	21.28	01 LPX 334
1000.0	50.0	BK7	546.1	1.5187	2.6	2.0	–1.70	998.30	1000.60	20.00	01 LPX 347
1000.0	80.0	BK7	546.1	1.5187	4.5	3.0	–3.00	997.00	1001.50	12.50	01 LPX 335
1000.0	145.0	BK7	546.1	1.5187	9.0	3.9	–5.90	994.10	1005.10	6.90	01 LPX 337

Melles Griot can reduce (edge) diameters of all lenses to meet your requirements.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP