

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Series 700 / 700i

FM Video with Three Duplex Channels



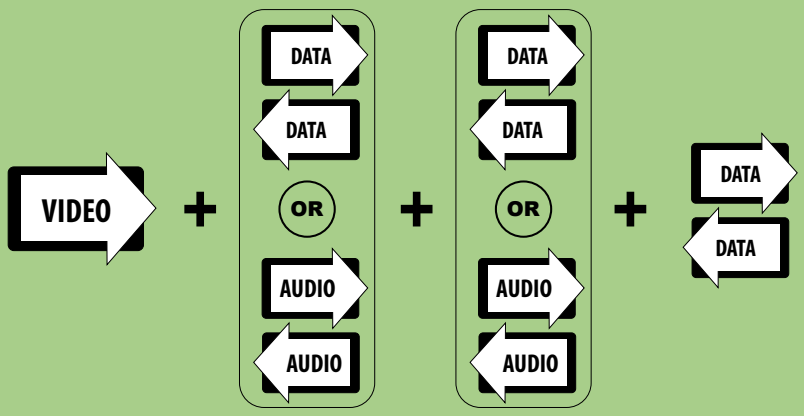

FEATURES:

- Surface Mount Technology (SMT) for High Reliability and Repeatability
- Hot Swappable Cards
- LaserBased Back-Biased Photo Detection Circuitry for Stable Optical Output Over Full Temperature Range (Singlemode)
- ST™, FC Optical Connector
- 7 MHz Video Bandwidth
- 10Hz to 20KHz Audio Bandwidth
- DC to 300Kb/s Data Rate
- Meets EIA RS-170, RS-343A
- Frequency Modulated (FM) Transmission
- SpectraSmartTMCompatible
- Meets NEMA TS1/TS2 and Caltrans Specifications
- Utilizes Internal Switching Power Supplies
- Meets RS-250C Transmission Requirements
- Compatible with AII NTSC, PAL, or SECAM Systems
- Automatically Resettable Solid-State Current Limiters on All Power Lines: Provides Equipment Protection
- Wide Optical Dynamic Range:Optical Attenuators are Never Required
- BNC Video Connector
- DB Type Connector for Data and/or Audio

DESCRIPTION:

The Series 700 and 700i are Frequency Modulated (FM), fiber optic video systems that transmit one video signal and three duplex data signals or two duplex audio whith one duplex data or one duplex audio and two duplex data signals for distances of 6Km on multimode fiber and 100Km over singlemode optical fiber.
The Series 700 operates over two optical fibers and the Series 700i operates over one optical fiber.
PAL, SECAM or NTSC formats, in B&W or color, are seamlessly transmitted. The Series 700's capabilities are enhanced by it's compatibility with Meridian's PC based SpectraSmart™ Network Management and Diagnostic software system. SpectraSmart™ supervises the operating parameters of the transmission system such as status on video levels, sync, FM carrier detect, voltage, temperature, optical levels, etc., and exter- nal equipment which are attached to the Meridian equipment.
See the SpectraSmart™ brochure for more details.

CONFIGURATIONS:

The 700 product family is available in rack mount cards that can be installed in all of Meridian's card chassis, desk chassis and 19" racking frames. This system can be configured in either star (module to rack) or trunking (rack to rack) configurations. This product requires no user adjustments & features superior quality and performance.

APPLICATIONS:

Security and Surveillance
Intelligent Transportation System (ITS)
Vessel Tracking System (VTS)
Access Control

SPECIFICATIONS:

Video

Format	NTSC, PAL, SECAM
Voltage/Impedance	1 Vp-p, 75 Ohm, 1.5 Vp-p max.
Bandwidth	5 Hz to 7 MHz @ -3 dB
Differential Gain	<2% typical
Differential Phase	<1.5° typical
SNR	64dB weighted*
Return Loss	>30 dB
Field Tilt	<0.5% max.
Carrier Frequency	70 MHz

Connectors

Video	75 Ohm BNC (Gold Center Pin)
Audio	DE-15 Female
Data	DE-15 Female
Optical	ST™, FC
Power	2 Pin Terminal Block

Quality

MTBF	>155,000 hours @ Ground Fix
	35°C per MIL217F

Audio

I/O Impedance	600 Ohm, 10 kOhm, 47 kOhm Balanced/Unbalanced
I/O Level	-6 to +6 dBm
Frequency Responce	10 Hz to 20 KHz
THD	<1%, 1KHz @ max modulation
SNR	>60 dB (weighted)*

Physical

Dimensions:	
Module (w/SR-500)	182 mm (7.16") L, 132 mm (5.21")W
	29 mm (1.15") H
Card	160 mm (6.3") L, 20 mm (0.8")W
	100 mm (4")H
Weight:	
Module (w/SR-500)	900 g (32 oz.)
Card	450 g (16 oz.)
Number of Rack Slots	One

Data

Formats	RS-232D, RS-422A, GenLock, Manchester,Biphase, 4-20mA Current Loop, TTL, Contact Closure,Sensornet
Rate	DC to 300 Kb/s
Bit Error Rate	10^{-9}*

Power

Card	4.2 W
Module	350 mA @ 12 VDC

Indicators (LEDs)


Red	Power On


Enviromental

Operating Temperature.	-40°C to +74°C
Storage Temperature.	-55°C to +85°C
Relative Humidity.	0 to 95% Non-condensing

** As per RS-250C, measured @ 1Km (multimode), @ 10Km (singlemode)*

PART NUMBER DIAGRAM

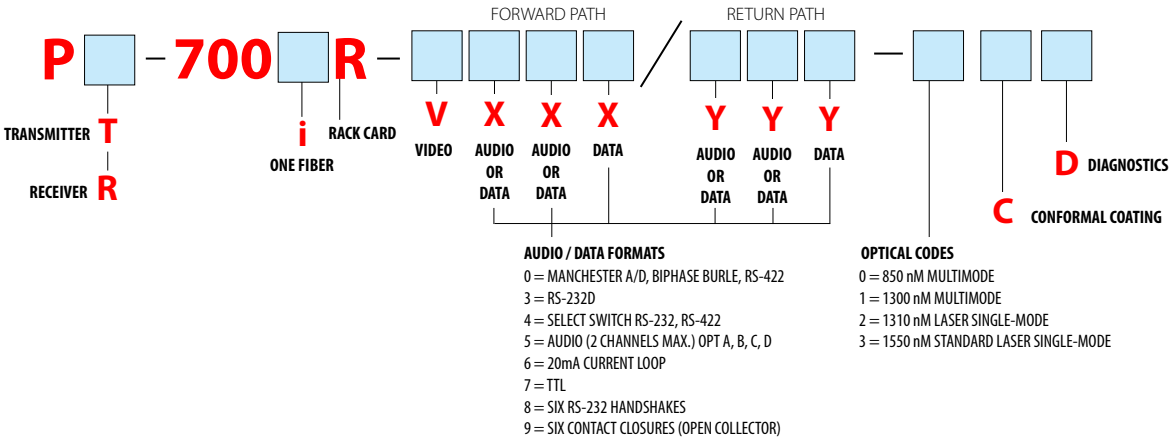

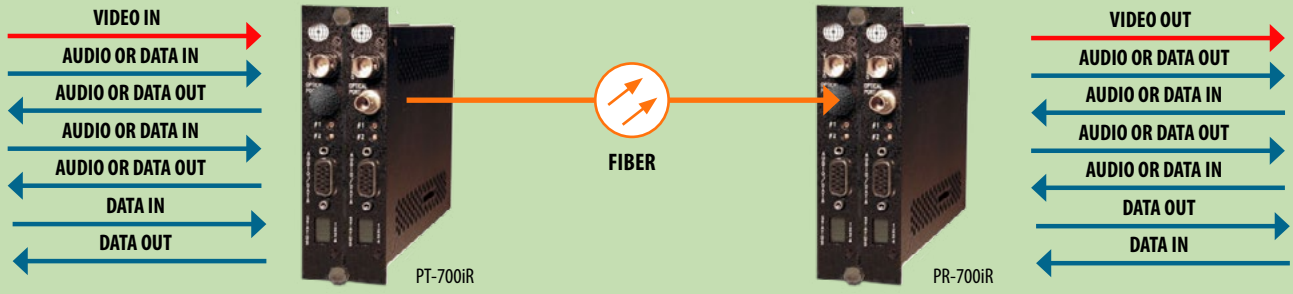

OPTICAL:

Meridian Fiber Code	Fiber Type/Size (um)	Optical Output (dBm)	Receiver Sensitivity (dBm)	Optical Budget (dB)	Wavelength (nm)	Optical Connector	Optical Dynamic Range (dB)
0	Multimode (SLED) 62.5 / 125	-13	-34	21 **	850	ST	39
1	Multimode (SLED) 62.5 / 125	-16	-34	18 **	1300	ST	39
2	Single-mode (Laser) 9/125	-7**	-34	27 **	1310	FC, ST	41
3	Single-mode (Laser) 9/125	-10**	-34	24 **	1550	FC, ST	41

** Distance is limited to fiber loss, splices and fiber bandwidth*
*** For 50/125µm fiber, subtract 3dB*
**** Higher output lasers available*

ver. 07/2024 B

Meridian Technologies Inc. • 700 Elmont Road • Elmont, NY 11003 • PH 516. 285. 1000 • FAX 516. 285. 6300 • sales@meridian-tech.com • www.meridian-tech.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP