

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

SyncServer S200

Enterprise Class GPS Network Time Server

The SyncServer S200 is discontinued. The replacement model is the SyncServer S600.



Key Features

- High-bandwidth NTP time server
- Stratum 1 operation via GPS satellites
- 3 independent 10/100Base-T ports
- High-resolution vacuum fluorescent display
- Full numeric keypad
- IPv6 and IPv4 compliant
- Secure web-based management
- SSH, SSL, SCP, SNMP v3, custom MIB, HTTPS, Telnet, and more
- Stratum 2 operation via NTP servers
- Nanosecond time accuracy to UTC
- Dedicated sysplex timer output
- Email alerts for alarms or errors
- Single satellite timing
- Two-year warranty
- Rubidium and OCXO oscillator upgrades

Key Benefits

- Synchronize thousands of client, server and workstation clocks
- Very reliable and secure source of time for your network
- Extremely accurate time source for network synchronization
- Improve network log file accuracy to speed network fault diagnosis and forensics
- Very easy to install and maintain
- Multiple NTP ports for easy network configuration and adaptation
- Intuitive web interface for easy control and maintenance
- IPv6 compliance futureproofs your network

The SyncServer® S200 GPS Network Time Server synchronizes clocks on servers for large or expanding IT enterprises and for the ever-demanding high-bandwidth Next Generation Network. Accurately synchronized clocks are critical for network log file accuracy, security, billing systems, electronic transactions, database integrity, VoIP, and many other essential applications.

The S200 is the easiest to set-up and maintain network time server in the world. The front panel is designed to quickly bring the time server online with a few front panel keystrokes or DHCP. To fully configure the unit, use the very intuitive web interface. The S200 is also the first network time server to offer step-by-step wizards for the most common operations. The state-of-the-art user interface offers the network administrator ease-of-use and remote access, with intuitive web pages and full control of the server via a standard browser interface.

Once online, the S200 provides reliable and secure network synchronization technology by combining multi-port, high-speed/ high-capacity network interfaces and versatile GPS timing receiver technology. It supports a wide range of network protocols including IPv4 and IPv6, for easy management and seamless integration into your existing and future network.

The high availability and throughput of the three 10/100Base-T ports translates into the support of hundreds of thousands of network clients while maintaining microsecond caliber NTP timestamp accuracy. They also provide the flexibility needed to easily adapt to different and changing network topologies and security requirements.

The Stratum 1 level S200 derives its time directly from the atomic clocks aboard the GPS satellite system. By using the integrated, 12-channel GPS receiver, every visible satellite can be tracked and used to maintain extremely accurate and reliable time.

If the GPS reference signal is ever lost, the S200 can automatically revert to a Stratum 2 mode and retrieve time from other user-designated time servers. Another option is that the S200 can be upgraded to an internal Rubidium atomic oscillator that keeps the S200 accurate to 25 microseconds per day.


The SyncServer S200 is your answer to bringing perfect timing to your network.

SyncServer S200

S200 NETWORKING EXCELLENCE

Unmatched Performance with Unparalleled Flexibility

The S200 has three dedicated and isolated 10/100Base-T Ethernet ports. These are connected to a high-speed microprocessor and a 50 nanosecond accurate clock to assure high bandwidth NTP performance. This more than meets the need of servicing 3200 NTP requests per second while maintaining microsecond caliber timestamp accuracy.



Three network ports provide network configuration flexibility and enhanced security. "Multiple" isolated and synchronized time servers can also be configured.

Three Ports for Flexibility and Security

Multiple ports provide the flexibility to adapt to different network topologies as networks grow and change. An S200 can be the single time source to synchronize clients that are on different subnets and different physical networks. It is also an ideal solution for synchronized time on in-band and out-of band networks. Since each port is independent, it can appear as though there are three clocks available, even though there is only a single time reference.

BEST PRACTICES

- Two time servers provide redundant time source protection for time clients.
- Peering between time servers assures time continuity to time clients if GPS is not available.
- Always configure time clients to reference at least two time servers.
- Increase network security by serving time via ports 2 and 3 and reserving port 1 for server management only.

In security sensitive networks we suggest using one port for maintenance and control functions and the other two ports for NTP timing functions only. This way the control port IP address information can be kept private and not distributed with the NTP addresses. IP address access control lists for each port also add enhanced security.

Extensive Protocol Support for Easy Network Integration and Management

All of the expected network management and monitoring protocols are standard in the S200. Secure access protocols such as SSH, SSL, HTTPS, along with legacy protocols such as DHCP and Telnet are included to provide you a choice in server management. SNMP v3 with a custom MIB allows you to automatically monitor the S200 and be advised of any important status changes. Any of these protocols can be quickly and easily disabled via the web based management interface.

Futureproof Your Network

The S200 supports both IPv4 and IPv6. This means your S200 can scale with your network operations and provide value for many years to come.

Automatic Software Upgrade Availability Notification

The S200 can periodically check the Microsemi® web site for newer versions of firmware. If a newer version is available, an informational SNMP trap or email is sent along with a status message in the web interface.


Point & Click Software Upgrades

Upgrading the firmware in the S200 is easy. Just browse to identify the firmware file and click the upload button. It is just as simple to backup and restore the server configuration files. This intuitive approach simplifies server management.


Time Server Log Files

A running log of activity and server configuration changes is maintained for later reference.


Examples of Network Timing Configurations




Basic configuration



Resilient configuration incorporating a Rubidium oscillator for improved holdover perfomance.

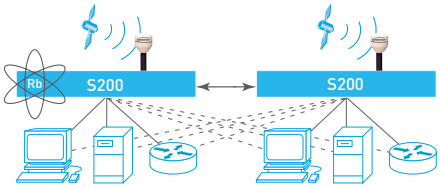


Redundant, resilient and secure configuration incorporating a Rubidium oscillator in the primary server and peering to another server for backup redundancy.

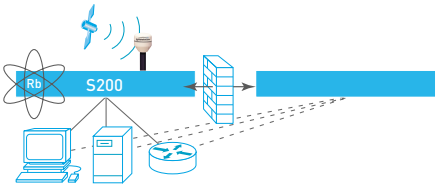

Resilient internal configuration. However, security, accuracy and reliability risks exist when peering with an external time server through the firewall.

SyncServer S200

S200 ADVANCED AND FUNCTIONAL DESIGN

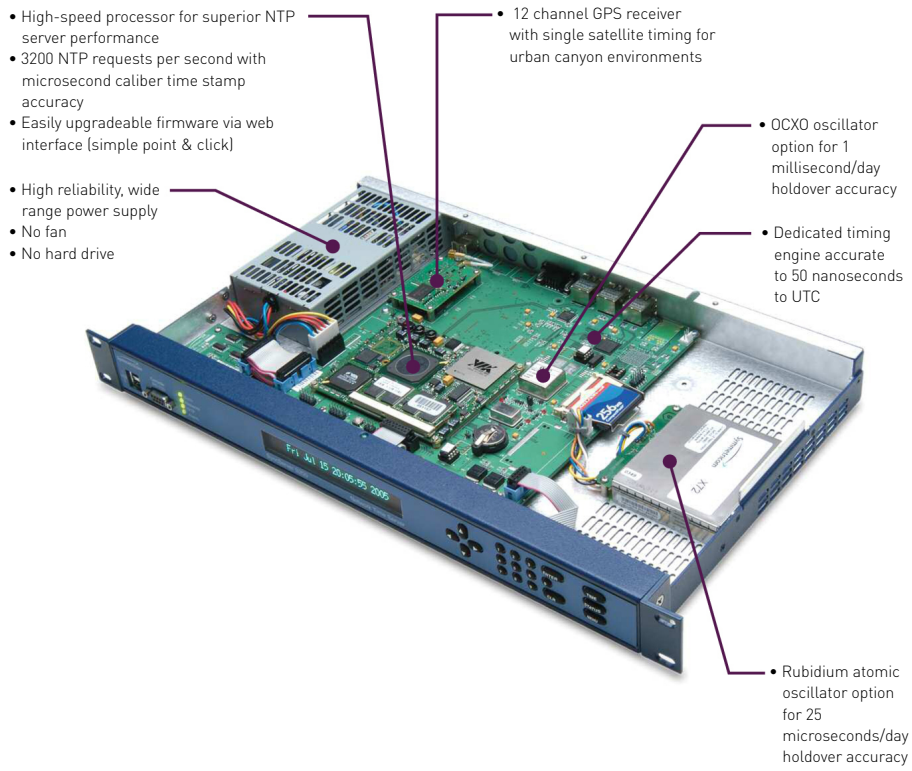

Customer Tested Design

As a 5th generation Microsemi time server, the S200 has decades of design experience behind it. Customer input is evident in every detail. The front panel is designed for quick setup, informative clear presentation of time and status, and convenient physical access to the console ports. The rear panel is configured with those connections that are changed infrequently, such as power, GPS antenna, and network ports.

Control At Your Finger Tips

The physical interface on the S200 has been developed and tested with the customer in mind. Keypad operation is quick and easy when using the full numeric keypad and control keys. You can cycle through different time formats by pressing the [TIME] key or get detailed status information by pressing the [STATUS] key. The S200 offers front panel menu control via the [MENU] button.



The full numeric keypad is the most efficient way to navigate a menu driven interface. The [TIME] & [STATUS] buttons quickly display the most critical information.

Quick and Easy Installation

The S200 has been optimized for quick setup via the keypad, requiring a minimum number of keystrokes. Just enter the basic network parameters or select DHCP and the unit is online. Once online, the web interface is the best and easiest way to customize the time server.

Primary configuration and management of the S200 is done via the intuitive and easy-to-use web interface. It is the first time server that offers wizards to streamline common setup and management tasks. No other time server is available with such an effortless interface that provides intuitive navigation and depth of control.

Crisp, Clear & Bright Display


Whether you need to view time information close-up or far away, the 256x32 high-resolution, variable intensity vacuum fluorescent display provides high visibility time and status in a variety of user selectable formats. The 1, 2 or 4 line display of data makes for a crystal clear time display along with an informative presentation of important configuration information.

At-A-Glance Status LEDs

LEDs present an excellent quick indicator of server status. The four LEDs provide status of the time reference (such as GPS), the network connection status, NTP operational status and request activity, and any existing alarm situation.



Crisp and bright vacuum fluorescent display offers high readability both near and far. Characters can be large, medium or small. Intensity is user adjustable.

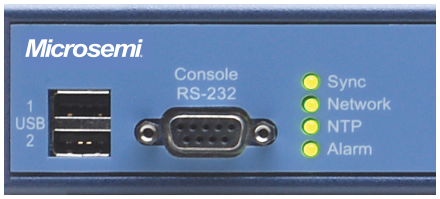

Informative Status LEDs provide at-a-glance health of the network time server. The USB ports add additional flexibility in back-up, restore and upgrade operations.

BEST PRACTICES


- A full numeric keypad with a display makes for quick initial setup and installation.
- Most interactions with a time server are remote and are best served with a full featured web interface and good SNMP support.

SyncServer S200

S200 FULL-FEATURED WEB INTERFACE

Intuitive, Easy-to-Use and Secure

The S200 is designed to have the web interface be the primary status and control console. It is organized in to logical groupings such as Status, Network, Timing, etc. The tabbed panels offer easy exploration of features and easy configuration of the server. Typical web interface conventions are followed so that operation is quickly mastered. Server access is password protected, with optional SSL encryption for added security. The web interface is enabled only through Port 1 so that the user may choose to keep that port IP address private and secure while serving time from Port 2 and/or Port 3.

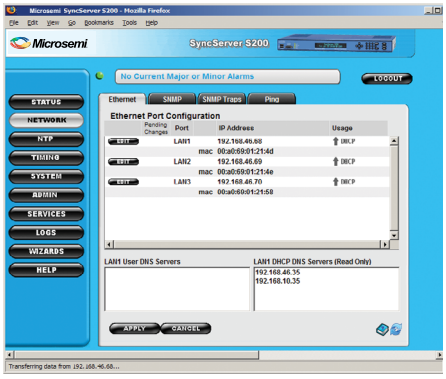

Wizards Speed Routine Server Configuration Tasks

The S200 is the first time server where wizards are available to guide you step-by-step through the more frequent or expected operations. From experience we know there are certain configuration activities that most customers will, at some point, want to perform with the server. These include initial set-up, configuring time source behaviors, back-up and restore operations, firmware upgrades, and more. The wizards make these operations very easy. Like all systems that include wizards, you can use the detailed configuration pages elsewhere in the web interface for custom configuration of the server.


Built-in Help System

The complete S200 manual is built into the web interface. The manual opens in a separate browser window. It is organized to match the control buttons and tabs so that information is quickly and easily found. On most pages there is link directly to the manual page for that panel. In addition there are context sensitive rollover descriptors of various features and tabs on any given panel.

Full System Status and Log Files

An essential part of a time server is knowing the system status when you need to. The S200 provides a semi-customizable green/red/orange light status with system messages for quick, at-a-glance information. Detailed status information is available on all of the major subsystems of the server via the tabbed panels in the Status section. Any alarms or critical alerts are quickly found on the Alarm panel. To examine operational events, the Log section of the web interface provides detailed listings of System, NTP, SNMP, HTTP, and Event activities.



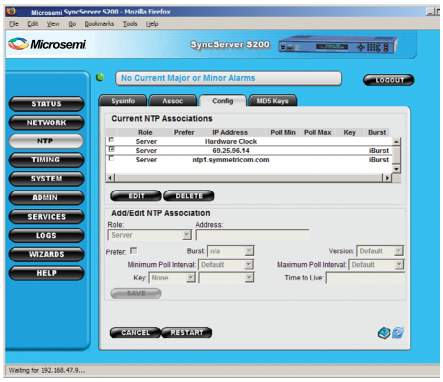

BEST PRACTICES

- Configuring a time server is generally done once and seldom repeated. For that reason it should be easy to configure and maintain.
- A well-structured web interface is a preferred interface for a network device as it is intuitive, efficient, and easy to use.
- Consider the importance of quick and easy configuration back-up and restore operations, as well as the simplicity of firmware upgrades.
- Use of web wizards saves time and eliminates possible configuration conflicts. Configuration flexibility is also important, so consider how easy it is to configure advanced features.
- Turning on the auto-notification of firmware update availability assures awareness of current firmware revisions and critical product notifications.

SyncServer S200

S200 PERFECT TIMING

Unprecedented NTP Accuracy

The Stratum 1 level S200 derives nanosecond accurate time directly from the atomic clocks aboard the GPS satellite system. By using an integrated, 12-channel GPS receiver, every visible satellite can be tracked and used to maintain accurate and reliable time. Even in urban canyon environments where satellite visibility can be limited, single satellite tracking provides accurate time from as few as one intermittent satellite. If needed, the S200 can also track satellites using a window mounted antenna.

The S200 can support hundreds of thousands of network clients while maintaining microsecond caliber NTP timestamp accuracy. NTP request throughput rates exceed 3200 requests/second while maintaining NTP timestamp accuracy. This easily translates into 0.5-2 ms typical client synchronization accuracy on a LAN.

Peering or Holdover, You Choose

If the GPS reference signal is lost entirely, the S200 can automatically revert to a Stratum 2 mode and retrieve time from other user designated internal or external network time servers (called "peering"). This prevents disruption of time service to the network and the network administrator is notified immediately via SNMP of the change in time reference status. A popular alternative to peering is letting the time server operate in holdover (also called "free run" or "flywheel") where the clock in the time server is allowed to drift if GPS is lost. The user can specify how far to let the clock drift in terms of estimated time accuracy before reverting to peering. If the optional Rubidium oscillator is installed, the S200 can flywheel for weeks and still be accurate to less than a millisecond.

BEST PRACTICES

- Remember that accurate synchronization is directly related to how often the time clients update their time from the time server.
- Peering with other time servers is easy and provides a redundant source of time as a fallback.
- The optional Rubidium oscillator keeps the S200 extremely accurate while serving NTP in the event GPS service is interrupted.

Time Cross-Checking for Peace of Mind Reliability


The S200 can time cross-check the on-board GPS receiver against at least two other time servers. This protects against an improperly operating GPS receiver that can subtly corrupt the time.

Flexible Control Over System Timing Inputs and Outputs

By definition the S200 serves NTP in UTC format (or optionally in GPS timescale). However, the S200 can display local time rather than UTC time on the front panel. The time can also be set manually with an override on the NTP alarms so that it behaves as though it is tracking a legitimate time source, even though it is actually in holdover.

Sysplex Timer for Mainframe Sync

A dedicated Sysplex timer port outputs serial time strings for IBM mainframe Sysplex systems. The Sysplex Timer provides a common time reference across all the members of an IBM Sysplex. The Sysplex Timer is a key component when systems on multiple CPCs share access to the same data.




Oscillator Upgrades Improve Holdover Accuracy and Save You Valuable Time

The standard S200 is equipped with a temperature compensated crystal oscillator (TCXO), that keeps the S200 accurate to nanoseconds when tracking GPS. However, if the GPS signal is lost, thereby placing the server in holdover, the TCXO will soon drift away from perfect. Upgrading the oscillator improves the holdover accuracy significantly. For example, consider the drift rates below:

Oscillator	Holdover Drift
TCXO	21 milliseconds per day
OCXO	1 millisecond per day
Rubidium	25 microseconds per day

The value of the upgraded oscillator is that if the GPS signal is lost the S200 can continue to serve very accurate NTP time. This provides the IT staff plenty of time to correct the problem with no degradation or disruption in network time synchronization accuracy.

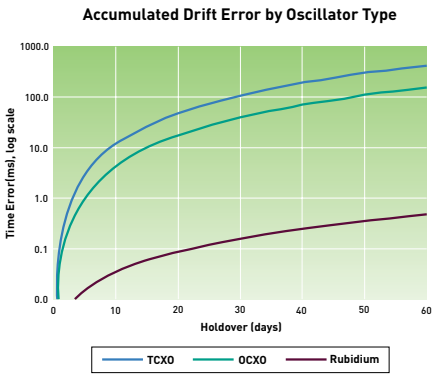

Plot of time error in milliseconds accumulated during holdover for different oscillator types. Note log scale of Y-axis.

SyncServer S200

Specifications

NETWORK PROTOCOLS

NTP (v2 - RFC1119, v3 - RFC1305, v4 - RFC5905)
NTP Unicast, Multicast, Broadcast
SNTP Simple Network Time Protocol (RFC4330)
TIME (RFC868)
DAYTIME (RFC867)
HTTP/SSL/HTTPS (RFC2616)
SSH/SCP (Internet Draft)
SNMPv3 (RFC3584)
Custom MIB
DHCP (RFC2131)
Telnet (RFC854)
MD5 Authentication (RFC1321)
SMTP Forwarding
Syslog 1 to 8 servers
IPv4
IPv6
Key management protocols can be individually disabled.
LAN 1: Management & Time protocols: LAN 2 & LAN 3: Time protocols only.

SERVER PERFORMANCE

- Stratum 1: 3200 NTP requests per second while maintaining an overall time stamp accuracy of 14 microseconds to UTC with a variation of less than 33 microseconds typical. This accuracy is inclusive of all NTP packet delays in and out of the SyncServer as measured at the network interface. Client synchronization accuracy to server on a LAN is 0.5 - 2 milliseconds (typical). The SyncServer easily supports many hundreds of thousands of NTP clients.
- Stratum 2: Peering can be used as the primary mode of operation or as a back up mode in case the GPS reference signal is lost. Time stamp accuracy depends on NTP peer server(s). NTP request handling capacity remains the same regardless of stratum level.
- Holdover Accuracy

TCXO (standard):	21 milliseconds/day
OCXO (optional):	1 milliseconds/day
Rubidium (optional):	25 microseconds/day

GPS RECEIVER/ANTENNA

- 12 channel parallel receiver
- Minimum number of satellites for time: 1 intermittently
- GPS time traceable to UTC (USNO)
- Accuracy: <50 ns RMS, 150 ns peak to peak to UTC, ≥4 satellites tracked. Network factors can reduce client synchronization accuracy to 0.5-2 ms (typical).
- Maximum Belden 9104 cable length: 150' (45 m). For longer cable runs see options.

MECHANICAL/ENVIRONMENTAL

• Size:	1.75" x 17" x 11.25" (4.5 cm x 43.2 cm x 28.6 cm) 1U rack mount
• Power:	100-240 VAC, 50-60 Hz, 25 watts (45 watts with Rb osc.), IEC 60320 C14 connector, power switch.
• Operating temperature:	0°C to +50°C 0°C to +45°C with Rubidium option
• Storage temperature:	-10°C to +70°C
• Humidity:	To 95%, noncondensing
• Certifications:	FCC, CE (RoHS), UL, PSE, China RoHS
• Server weight alone:	8 lbs (3.6 kgs)
• Shipping package weight:	15 lbs (6.8 kgs)

Front Panel

Display:	Sharp, high-resolution 32x256 dot-matrix vacuum-fluorescent. 1, 2 or 4 line.
Keypad:	0-9 numeric, up, down, left, right, ENTER, CLR, TIME, STATUS, MENU.

LEDs (tri-color green/red/orange)

Sync:	Time reference status
Network:	Network connection status
NTP:	NTP activity
Alarm:	Fault condition
Serial:	DB9-F 9600, N, 8, 1
USB:	(2x) ports for back up, restore, and upgrade operations via the front panel.

Rear Panel

Network (3x):	RJ-45	10Base-T/100Base-TX Ethernet
Sysplex:	DB9-M	RS-232
GPS:	BNC	L1, 1575 MHz

CLIENT SOFTWARE

An NTP client is required for client-side synchronization with any network time server, including the S200. Comprehensive time client, server & management software for easy distribution, management and monitoring of time across the network is available.

PRODUCT INCLUDES

S200 Network Time Server, L1 GPS antenna, 50' (15 m) Belden 9104 coaxial cable, 1 ft. antenna mounting mast (30 cm) with two clamps, category 5 patch cable, DB9-M to DB9-F RS-232 extension cable, manual, Enterprise MIB software, power cord, and rack mount ear kit. Two-year warranty [Part 1520R-S200].

OPTIONS

- Rubidium or OCXO oscillator upgrade for extended holdover (OCXO on select models only) [Entire Server sold as Part 1520R-S200-RB or 1520R-S200-OCXO]
- ±40-60 Vdc power supply [Entire Server sold as Part 1520R-S200-DC]
- Window mounted antenna [Part 500-140-619]
- GPS antenna in-line amplifier for cable runs to 300' (90 m) [Part 150-200]
- GPS antenna down/up converter for cable runs to 1500' (457 m)
- Lightning arrestor [Part 150-709 or 150-710]
- Comprehensive time client, server & management software for easy distribution, management and monitoring of time across the network is also available.
- IEEE 1588 / PTP see SyncServer S300 or S350



Rear View



Front View

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

Microsemi
Power Matters.

Microsemi Corporate Headquarters
One Enterprise, Aliso Viejo, CA 92656 USA
Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Sales: +1 (949) 380-6136
Fax: +1 (949) 215-4996
email: sales.support@microsemi.com
www.microsemi.com

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 4,800 employees globally. Learn more at www.microsemi.com.

©2016 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

DS/S200/0816 900-00444-000B

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP