



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)



## MM-6704 Data Sheet

### A VMEbus Compatible, Non-volatile, High Speed Static Memory


---

#### FEATURES:

- **Capacity:** 512K to 4M bytes (expandable to 16 Mbytes)
- **Cycle Time:**  
150 nsec sustained rate (guaranteed over 25 Mbytes transfer rate for read or write cycles without refresh delays)
- **VMEbus compatible** with A32/A24/A16, D32/D16/D8 (UAT) per Revision C.1
- **Block transfer** for sequential access (BLT)
- **Module selection** on 64 Kbytes boundaries, jumper-selectable for starting and ending address
- **Four independent memory blocks**  
(each having independent, adjustable DTACK) allow mixing of RAMs and EPROMs of the same size
- **Three on-board,**  
redundant, fused batteries with battery charger, LED indicators and CSR for status reporting
- **Data Retention:** 2 years with Lithium batteries; 4 weeks with rechargeable NiCad batteries
- **On-board calendar/clock** counts secs, mins, hrs, days, date
- **One-year warranty**

---

#### DESCRIPTION:

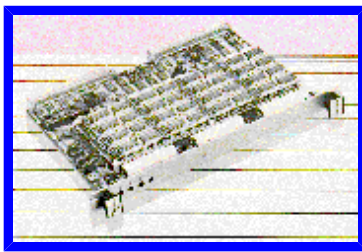

The MM-6704 is a high speed, high density static CMOS non-volatile memory module. To maximize density, support devices are surface mounted. Memory devices are 128 Kbytes DIPs to provide the flexibility to mix static CMOS and EPROMs. The board occupies a single card slot. Built in to the board is future expansion to 16 Mbytes using 1 Mbit CMOS chips.

The board is designed to be totally compatible with VMEbus specification REV. C1 with block transfer (BLT) of up to 256 bytes in each burst and unaligned data transfers (UAT).

CMOS and EPROM can be installed at the same time and a different DTACK\* signal generated for each without penalizing either one. Write-protect switches allow disabling the write operation for selected portions of the CMOS RAM, which then appear as read-only memory.

---

## **SPECIFICATIONS:**

### **Capacity**

512K, 1M, 2M, 4M bytes (expandable to 16Mbytes with 1 Mbit CMOS chips)

### **Cycle/Access Time**

150 nsec (25 Mbytes guaranteed transfer rate)

### **Address**

32 bits + 6-bit Address Modifiers

### **Data-in/Data-out**

8, 16, 32 bits (UAT)

### **Sequential Access**

Block Transfer of 256 bytes (BLT)

### **Modes of Operation**

Read, Write, Read-Modify-Write, Write-Protect

### **Module Selection**

64 Kbytes, jumper-selectable by setting the start and ending addresses

### **Real Time Clock (DS12161)**

Provides accurate time and date and occupies one location in the short I/O space (A16)

### **On-Board Batteries**

3 redundant, high-temperature fused batteries; each battery has its own charger, voltage detector and LED display

### **Battery Types**

NiCad (rechargeable) 100mA/hr, data retention 4 weeks (powered down)

Lithium (non-rechargeable) 1500 mA/hr, data retention 2 years (powered down)

### **Power Requirements**

+5V supply @ 1.8A (fully populated with CMOS RAM)

### **Operating Temperature**

0 to +60 degrees (Celsius)

### **Storage Temperature**

-40 to +85 degrees (Celsius)

**Relative Humidity**

Up to 95% without condensation

---

**ORDERING INFORMATION:**

MM-6704CC/XXX (Rechargeable Ni-Cad batteries)

XXX = 512K, 1M, 2M, 4M bytes

MM-6704CN/XXX (Non-rechargeable Lithium batteries)

XXX = 512K, 1M, 2M, 4M bytes

---



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)