

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Coaxial

Power Splitter/Combiner

6 Way-0° 50Ω 800 to 2000 MHz

ZB6PD-2+
ZB6PD-2



SMA version shown
CASE STYLE: Z259

Connectors	Model	Price	Qty.
SMA	ZB6PD-2-S(+)	$158.95	(1-9)
N-TYPE	ZB6PD-2-N(+)	$158.95	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.875W max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S
PORT 1,2,3,4,5,6	1,2,3,4,5,6


Features

- wideband, 800 to 2000 MHz
- excellent VSWR, 1.1:1 typ. output
- high isolation, 27dB typ.
- rugged, shielded case
- up to 10W power input as splitter

Applications

- cellular
- PCN
- instrumentation
- satellite distribution

Outline Drawing

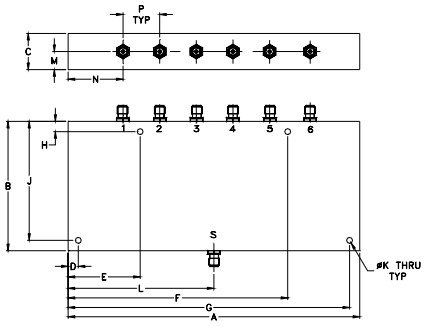

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H
7.06	3.13	.88	.250	1.750	5.310	6.810	.250
179.32	79.50	22.35	6.35	44.45	134.87	172.97	6.35

J	K	L	M	N	P	wt
2.875	.144	3.53	.44	1.31	.89	grams
73.03	3.66	89.66	11.18	33.27	22.61	800

Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 7.8 dB		AMPLITUDE UNBALANCE (dB)	VSWR (:1)			
						S		OUT	
f_L-f_U	Typ.	Min.	Typ.	Max.	Max.	Typ.	Max.	Typ.	Max.
800-2000	27	17	0.7	1.7	0.7	1.2	1.6	1.13	1.3

Typical Performance Data


Frequency (MHz)	Total Loss[1] (dB)	Amplitude Unbalance (dB)	Isolation (dB)		VSWR S	VSWR OUTPUTS
			Adjacent	Opposite		
801.50	8.47	0.33	39.60	23.12	1.15	1.21
887.00	8.49	0.31	32.26	24.98	1.12	1.19
986.50	8.54	0.33	27.48	26.44	1.21	1.18
1085.00	8.52	0.31	26.40	28.83	1.18	1.17
1179.50	8.53	0.31	25.53	31.14	1.03	1.11
1278.50	8.60	0.31	22.70	28.45	1.21	1.07
1377.50	8.61	0.30	22.46	26.13	1.31	1.12
1472.00	8.66	0.30	26.27	26.38	1.25	1.15
1571.00	8.69	0.27	38.21	32.21	1.19	1.15
1665.00	8.71	0.26	38.95	29.48	1.19	1.11
1764.50	8.77	0.33	31.36	27.36	1.21	1.06
1863.50	8.84	0.30	29.93	27.81	1.22	1.07
1913.00	8.89	0.32	28.17	27.62	1.23	1.07
1958.00	8.97	0.34	24.73	25.52	1.24	1.07
1998.50	9.01	0.35	21.70	23.15	1.25	1.07

1. Total Loss = Insertion Loss + 7.8dB splitter loss.


ZB6PD-2
TOTAL LOSS

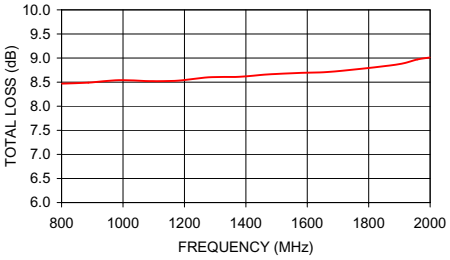


ZB6PD-2
ISOLATION

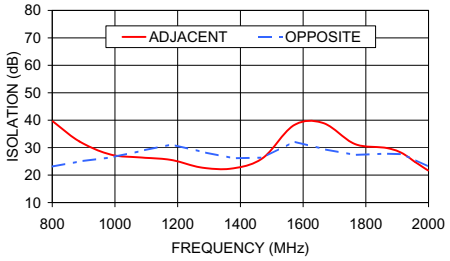

ZB6PD-2
VSWR

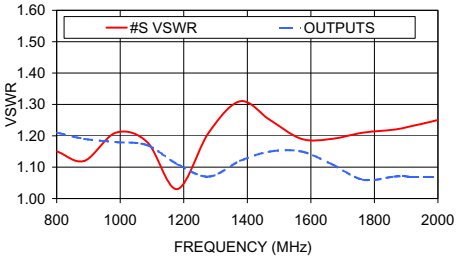

electrical schematic

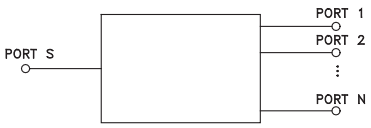

For detailed performance specs & shopping online see web site

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 *The Design Engineers Search Engine Provides ACTUAL Data Instantly at* minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. **2.** Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. **3.** The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M127604
ZB6PD-2
HY/TD/CP/AM
100615

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP