ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Mitsubishi PM100CVA120* at our website: *Click HERE*

MITSUBISHI INTELLIGENT POWER MODULES

PM100CVA120


FLAT-BASE TYPE
INSULATED PACKAGE

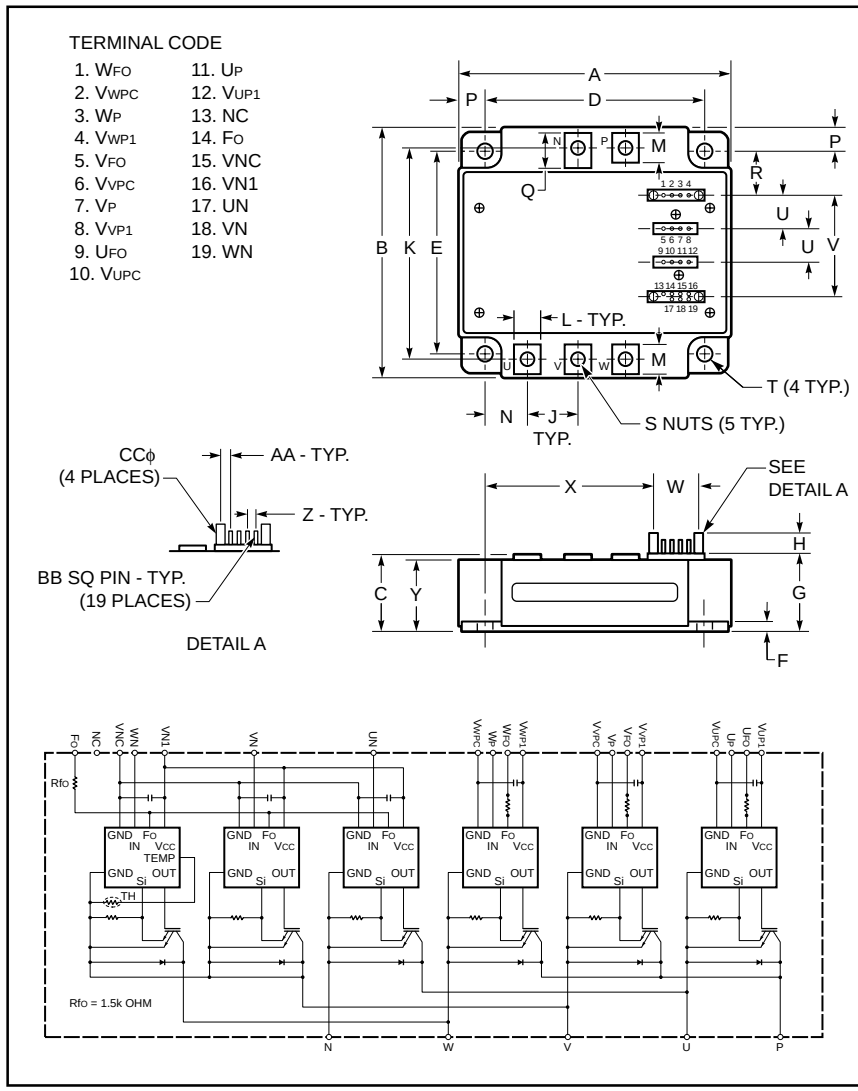

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	4.72	120.0
B	4.02	102.0
C	0.95+0.04/-0.02	24.1+1.0/-0.5
D	4.13±0.010	105.0±0.25
E	3.43±0.010	87.0±0.25
F	0.16	4.0
G	0.95	24.1
H	0.42	10.6
J	0.87	22.0
K	3.51±0.02	89.2±0.5
L	0.47	12.0
M	0.48	12.3
N	0.77	19.5
P	0.30	7.5

Dimensions	Inches	Millimeters
Q	0.59	15.1
R	0.72	18.25
S	M5 Metric	M5
T	0.22 Dia.	Dia. 5.5
U	0.56±0.010	14.1±0.25
V	1.72±0.012	43.57±0.3
W	0.57±0.012	14.6±0.3
X	3.35	85.2
Y	0.85	21.6
Z	0.10±0.010	2.54±0.25
AA	1.37±0.010	3.49±0.25
BB	0.02 SQ	0.64 SQ
CC	0.12+0.04/-0.02	3.0+1.0/-0.5



Description:
Mitsubishi Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:
- ☐ Complete Output Power Circuit
- ☐ Gate Drive Circuit
- ☐ Protection Logic
  - – Short Circuit
  - – Over Temperature
  - – Under Voltage

Applications:
- ☐ Inverters
- ☐ UPS
- ☐ Motion/Servo Control
- ☐ Power Supplies

Ordering Information:
Example: Select the complete part number from the table below -i.e. PM75CVA120 is a 1200V, 75 Ampere Intelligent Power Module.

Type	Current Rating Amperes	V_{CES} Volts (x 10)
PM	100	120

MITSUBISHI ELECTRIC

PM100CVA120

FLAT-BASE TYPE
INSULATED PACKAGE

Absolute Maximum Ratings, T_j = 25°C unless otherwise specified

Ratings	Symbol	PM100CVA120	Units
Power Device Junction Temperature	T_j	-20 to 150	°C
Storage Temperature	T_{stg}	-40 to 125	°C
Case Operating Temperature	T_C	-20 to 100	°C
Mounting Torque, M5 Mounting Screws	—	2.5 ~ 3.5	N · m
Mounting Torque, M5 Main Terminal Screws	—	2.5 ~ 3.5	N · m
Module Weight (Typical)	—	730	Grams
Supply Voltage (Applied between P - N)	$V_{CC(surge)}$	1000	Volts
Supply Voltage Protected by SC (V_D = 13.5 ~16.5V, Inverter Part, T_j = 125°C Start)	$V_{CC(prot.)}$	800	Volts
Isolation Voltage (Main Terminal to Baseplate, AC 1 min.)	V_{iso}	2500	Vrms

Control Sector

Supply Voltage (Applied between V_{UP1}-V_{UPC}, V_{VP1}-V_{VPC}, V_{WP1}-V_{WPC}, V_{N1}-V_{NC})	V_D	20	Volts
Input Voltage (Applied between U_P-V_{UPC}, V_P-V_{VPC}, W_P-V_{WPC}, U_N · V_N · W_N-V_{NC})	V_{CIN}	20	Volts
Fault Output Supply Voltage (Applied between U_{FO}-V_{UPC}, V_{FO}-V_{VPC}, W_{FO}-V_{WPC}, F_O-V_{NC})	V_{FO}	20	Volts
Fault Output Current (Sink Current at U_{FO}, V_{FO}, W_{FO} and F_O Terminal)	I_{FO}	20	mA

IGBT Inverter Sector

Collector-Emitter Voltage (V_D = 15V, V_{CIN} = 15V)	V_{CES}	1200	Volts
Collector Current, (T_C = 25°C)	I_C	100	Amperes
Peak Collector Current, (T_C = 25°C)	I_{CP}	200	Amperes
Collector Dissipation (T_C = 25°C)	P_C	595	Watts

Electrical and Mechanical Characteristics, T_j = 25°C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Control Sector						
Short Circuit Trip Level	SC	-20°C ≤ T_j ≤ 125°C, V_D = 15V	145	—	—	Amperes
Short Circuit Current Delay Time	$t_{off(SC)}$	V_D = 15V	—	10	—	µs
Over Temperature Protection	OT	Trip Level	100	110	120	°C
(V_D = 15V, Lower Arm)	OT_r	Reset Level	85	95	105	°C
Supply Circuit Under Voltage Protection	UV	Trip Level	11.5	12.0	12.5	Volts
(-20°C ≤ T_j ≤ 125°C)	UV_r	Reset Level	—	12.5	—	Volts
Circuit Current	I_D	V_D = 15V, V_{CIN} = 15V, V_{N1}-V_{NC}	—	40	55	mA
		V_D = 15V, V_{CIN} = 15V, V_{XP1}-V_{XPC}	—	13	18	mA
Input ON Threshold Voltage	$V_{th(on)}$	Applied between U_P-V_{UPC}, V_P-V_{VPC},	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{th(off)}$	W_P-V_{WPC}, U_N · V_N · W_N-V_{NC}	1.7	2.0	2.3	Volts
Fault Output Current	$I_{FO(H)}$	V_D = 15V, V_{FO} = 15V*	—	—	0.01	mA
	$I_{FO(L)}$	V_D = 15V, V_{FO} = 15V*	—	10	15	mA
Minimum Fault Output Pulse Width	t_{FO}	V_D = 15V*	1.0	1.8	—	ms

* Fault output is given only when the internal SC, OT, and UV protections circuits of either an upper-arm or a lower-arm device operate to protect it.

Electrical and Mechanical Characteristics, T_j = 25°C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector-Emitter Cutoff Current	I_{CES}	$V_{CE} = V_{CES}$, V_D = 15V, T_j = 25°C	—	—	1.0	mA
		$V_{CE} = V_{CES}$, V_D = 15V, T_j = 125°C	—	—	10.0	mA
FWDi Forward Voltage	V_{EC}	$-I_C$ = 100A, V_D = 15V, V_{CIN} = 15V	—	2.50	3.50	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	V_D = 15V, V_{CIN} = 0V, I_C = 100A, Pulsed, T_j = 25°C	—	2.65	3.30	Volts
		V_D = 15V, V_{CIN} = 0V, I_C = 100A, Pulsed, T_j = 125°C	—	2.75	3.35	Volts
Inductive Load Switching Times	t_{on}	V_D = 15V, V_{CIN} = 0V ↔ 15V, V_{CC} = 600V, I_C = 100A, T_j = 125°C	0.4	0.9	2.3	µs
	t_{rr}		—	0.2	0.3	µs
	$t_{C(on)}$		—	0.4	1.0	µs
	t_{off}		—	2.4	3.4	µs
	$t_{C(off)}$		—	0.7	1.2	µs

Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each Inverter IGBT	—	—	0.21	°C/Watt
	$R_{th(j-c)F}$	Each Inverter FWDi	—	—	0.35	°C/Watt
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied	—	—	0.025	°C/Watt

Recommended Conditions for Use


Characteristic	Symbol	Condition	Value	Units
Supply Voltage	V_{CC}	Applied across P-N Terminals	≤ 800	Volts
	$V_{CE(surge)}$	Applied across P-N Terminals	≤ 1000	Volts
	V_D	Applied between V_{UP1}-V_{UPC}, V_{VP1}-V_{VPC}, V_{WP1}-V_{WPC} *, V_{N1}-V_{NC}	15 ± 1.5	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between U_P-V_{UPC}, V_P-V_{VPC}, W_P-V_{WPC}, U_N · V_N · W_N-V_{NC}	≤ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$		≥ 4.0	Volts
Arm Shoot-Through Blocking Time	t_{dead}	For IPM's each Input Signal	≥ 3.0	µs

* With ripple satisfying the following conditions, dv/dt swing ≤ 5V/µs, Variation ≤ 2V peak to peak.


PM100CVA120

FLAT-BASE TYPE
INSULATED PACKAGE


SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

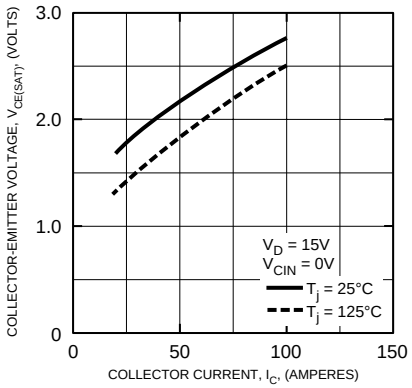


COLLECTOR-EMITTER SATURATON VOLTAGE CHARACTERISTICS (TYPICAL)

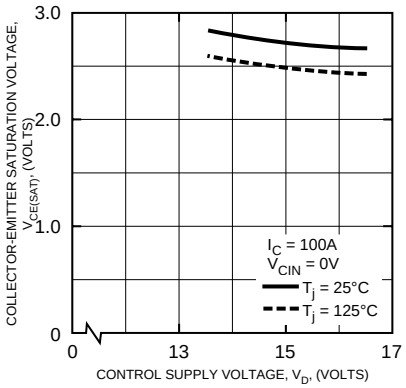


OUTPUT CHARACTERISTICS (TYPICAL)

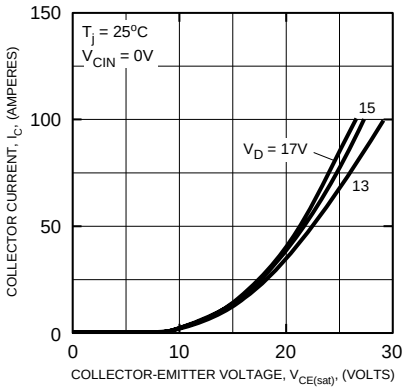


SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL)

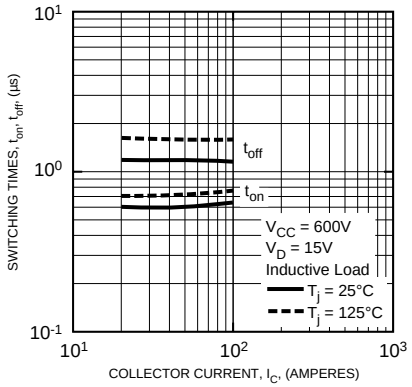


SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL)

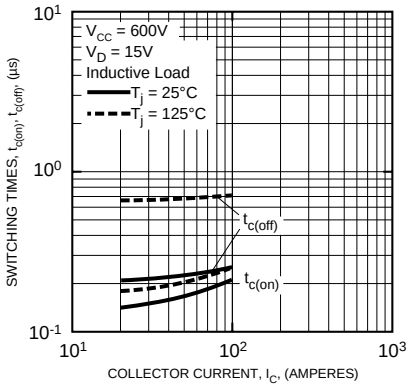


SWITCHING LOSS CHARACTERISTICS (TYPICAL)

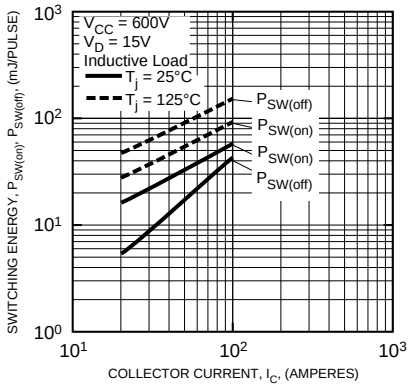


REVERSE RECOVERY CURRENT VS. COLLECTOR CURRENT (TYPICAL)

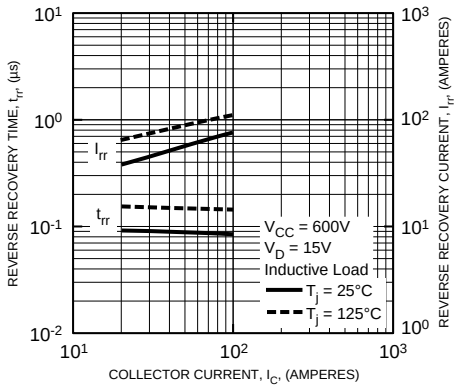

DIODE FORWARD CHARACTERISTICS

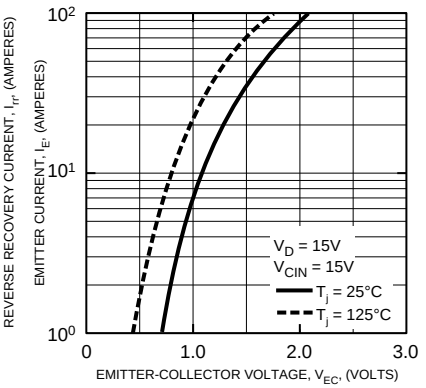


CIRCUIT CURRENT VS. CARRIER FREQUENCY

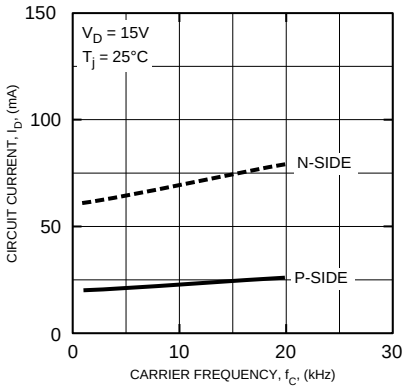


MITSUBISHI ELECTRIC


OVER CURRENT TRIP LEVEL VS. SUPPLY VOLTAGE (TYPICAL)

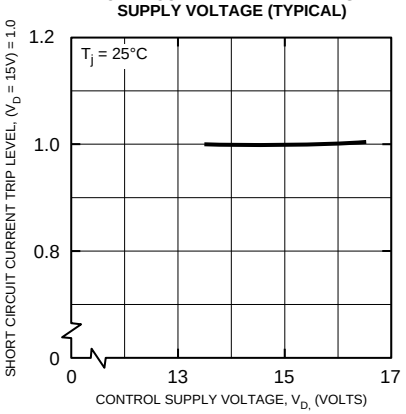


OVER CURRENT TRIP LEVEL TEMPERATURE DEPENDENCY (TYPICAL)

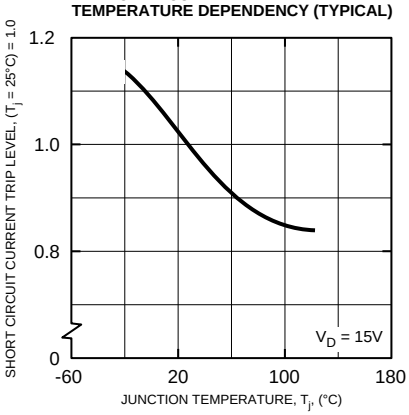


FAULT OUTPUT PULSE WIDTH VS. TEMPERATURE (TYPICAL)

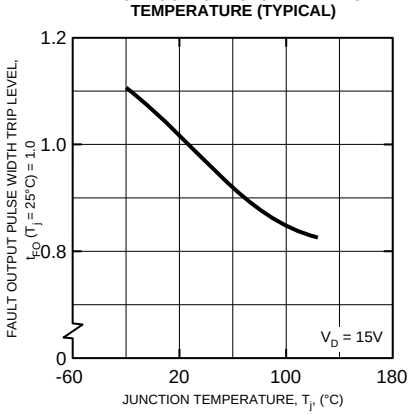


CONTROL SUPPLY VOLTAGE TRIP-RESET LEVEL TEMPERATURE DEPENDENCY (TYPICAL)

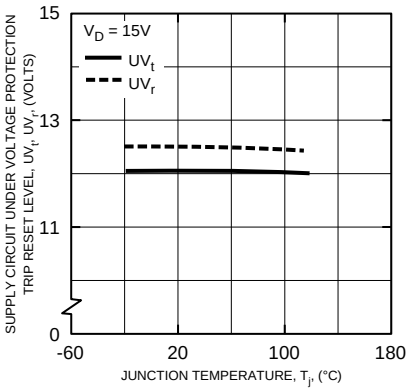

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (Each IGBT)

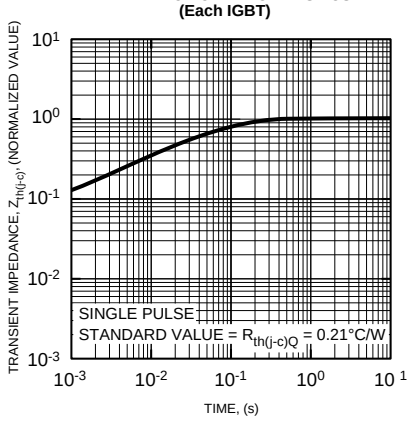

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (Each FWDi)

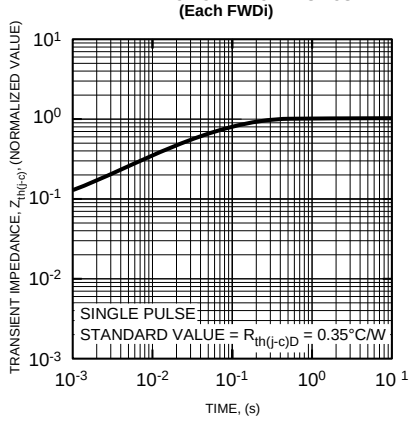

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP