

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Series 355

Micro-Ion® Hot Cathode Transducer


The Micro-Ion® Hot Cathode Transducer combines the world's smallest ionization gauge with control electronics to create a compact, convenient, reliable, and cost-saving solution for many high vacuum applications. The Micro-Ion gauge includes many features that provide much more accurate and repeatable measurement than traditional Bayard-Alpert gauges from 5 x 10^{-2} Torr to 10^{-9} Torr. The all-metal package is a rugged enclosure and providing a high level of immunity to electrical noise. High performance in a small volume is achieved though several enhancements including a patented dual ion collector design that optimizes electron motion and ion collection.

Transducers are available with analog output, RS485 or DeviceNet™ interfaces. The analog output and DeviceNet versions have a digital display option for convenient, point-of-use pressure readout.



Product Features

- Compact, convenient, reliable, cost-saving vacuum measurement
- Vacuum pressure measurement to 10^{-9} Torr (10^{-9} mbar, 10^{-7} Pa)
- Dual filaments increase equipment uptime
- Ultra-clean construction allows rapid response during pump down
- Rugged, all-metal, RF and noise-immune transducer
- Optional local display aids in setup and diagnostics
- RS485 and DeviceNet digital interfaces available
- Provides increased long-term stability over traditional designs

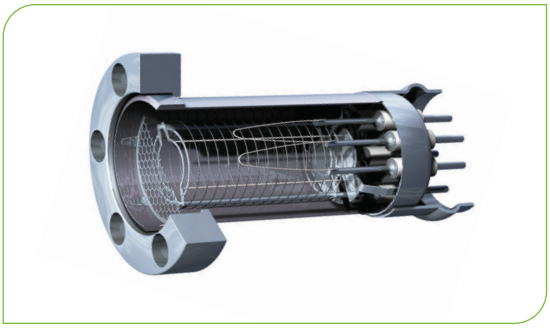

Cross section of the Micro-Ion® Vacuum Gauge

Wide Measurement Range: Allows vacuum system performance to be monitored continuously from 5 x 10^{-2} to 10^{-9} Torr (7 x 10^{-2} to 10^{-9} mbar, 7 to 10^{-7} Pa).

Dual Filaments: Dual, burn-out resistant yttria-coated iridium filaments provide long gauge life. Unscheduled downtime is avoided by using the second filament as a back-up until the gauge can be replaced during regular maintenance procedures.

Ultra-Clean Construction: Micro-Ion gauges are designed, constructed, and processed to minimize outgassing. All components are vacuum fired and assembled in a Class 100 cleanroom environment. This assures rapid, repeatable response during vacuum chamber pumpdown.

Cooler Operation: At only 8% of the power consumption of a glass or nude gauge, the Micro-Ion gauge generates much less heat, minimizing the disruption to a process or experiment.

Analog Output Version: The basic version provides an easy-to-use analog output signal that is linear with the logarithm of the pressure. An optional large green LED display provides point-of-use pressure indication.

Digital Interface Version: Transducers are available with an RS-485 or DeviceNet interface for easy compatibility with computer controlled processes. The digital interface versions have a set point relay allowing for control of other vacuum equipment or to provide a safety interlock.

All-Metal Package: Provides high level of immunity to RF noise.

Replacement Gauge: Unique, no tools required detachable gauge.

Wide Selection of Vacuum Fittings: Simplifies installation on your vacuum system.


Long Term Stability: End caps which control ion flow, welding grid windings every 180°, and the all-metal housing provide repeatable measurements over time.



Micro-Ion® Hot Cathode Transducer



Replacement Gauge

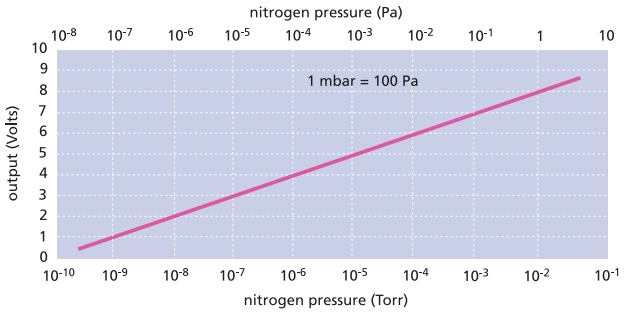

Analog Output Signal

Specifications

Measurement Range for Air and N_2 See Notes (1), (2), (3)	
Torr	1×10^{-9} to 5×10^{-2}
mbar	1×10^{-9} to 7×10^{-2}
Pa	1×10^{-7} to 7
Emission Current	0.02 mA, 0.1 mA, or 4 mA
Degas	Electron bombardment, 3 W with 2-minute timer
Overpressure Protection	Transducer self protects by turning off filament power at upper pressure limit (adjustable)
Weight	370 gm (12 oz) with NW16KF flange
Power Required	24 VDC ±15%, 12 W max
Operating Temperature	0°C to 40°C ambient, non-condensing
Non-Operating Temperature	-40°C to 70°C
Case Material	Aluminum extrusion
Analog Output Version	1 Volt/decade, logarithmic, 0 to 9 V
Filament Control	Push button switch on top of transducer
Input Signals	Filament on/off, degas on/off and emission current are set by continuity to ground
Output Signals	Filament and degas on/off status are determined by an open collector transistor
Connector	9-pin D male
Display (option)	2 digits plus exponent, green LED
RS485 Interface Version	RS485 with one set point relay
Parameters Adjustable	Filament on/off, degas on/off, emission current select, filament select, set point (value, direction, and hysteresis)
Baud Rate	19200 Baud (default value)
Data Format	ASCII, 8 data bits, one stop-bit, no parity, no handshake (default values)
Relay Configuration	Single-pole, double-throw (SPDT)
Relay Contact Rating	1 A at 30 VDC resistive load, 0.5 A at 125 VAC non-inductive
Connector	9-pin D male
DeviceNet Interface Version	
Messaging	Polled I/O and explicit
Data Rates	125, 250 or 500 kbaud, switch selectable
Address	0 to 63, selected by using the Low and High address switches
Micro-Ion Gauge	
Sensitivity	20/Torr, 15/mbar, 0.15/Pa
X-ray Limit	$< 3 \times 10^{-10}$ Torr, $< 4 \times 10^{-10}$ mbar, $< 4 \times 10^{-10}$ Pa See Note (3)
Filament Materials	Yttria-coated iridium or tungsten See Note (4)
Other Materials Exposed to Gas	304 stainless steel, alumina, tantalum, tungsten, CuAg eutectic, Kovar®
Internal Gauge Volume	10.8 cm^3 (0.66 $in.^3$) to the port screen
Gauge Bakeout Temperature	200°C maximum (with electronics removed)
Compliance	CE, SEMI S2

Notes:

(1) Measurements will change with different gases and mixtures. Correction parameters for common gases are provided in the instruction manual.


(2) Micro-Ion Gauges are not intended for use with flammable or explosive gases.

(3) The X-ray limit is the absolute lowest indication from the gauge. It is not practical to make repeatable measurements near the X-ray limit.


(4) Tungsten filaments are for applications involving gases containing fluorine, chlorine, or other gas species that poison yttria-coated iridium filaments. Tungsten filaments are not recommended for general vacuum applications because they may burn out when exposed to high pressures including, but not limited to, H_2O.

Ordering Information


Analog Output Version, No Set Points

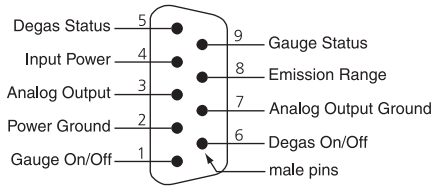


RS485 Interface Version, One Set Point

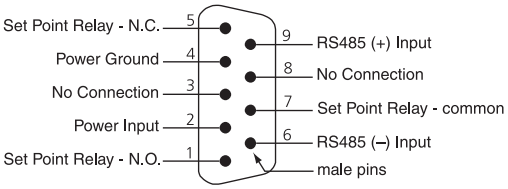


DeviceNet Interface Version, 9-Pin Trip Point Connector

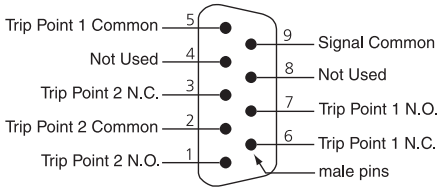

3-Pin Power Connector



5-Pin Power Connector




Electrical Connectors

Analog, RS485 and DeviceNet Interface Versions

Ordering Code Example: 355410-1-YD-T	Code	Configuration
Series 355 Micro-Ion Transducer	355	355
Display		
Without display	4	4
With display (Analog and DeviceNet only)	6	
Interface		
Analog	00	10
RS485 (No Display Option, Torr Units Only)	10	
DeviceNet	20	
Relay Set Points		
No Relay Set Points (Analog only)	0	1
1 Relay Set Point (RS485 only)	1	
2 Relay Set Points (DeviceNet only)	2	
Filaments		
Yttria-coated iridium	Y	Y
Tungsten	T	
Flange/Fitting		
NW16KF	D	D
NW25KF	E	
NW40KF	K	
1.33 inch (NW16CF) ConFlat®-type	F	
2.75 inch (NW35CF) ConFlat®-type	G	
1/2 inch VCR-type male	H	
Measurement Units		
Torr	T	T
mbar	M	
Pa	P	

Replacement Gauge Ordering Code Example: 355001-YE	Code	Configuration
Series 355 Micro-Ion Transducer	355001	355001
Filaments		
Yttria-coated iridium	Y	Y
Tungsten	T	
Flange/Fitting		
NW16KF	D	E
NW25KF	E	
NW40KF	K	
1.33 inch (NW16CF) ConFlat®-type	F	
2.75 inch (NW35CF) ConFlat®-type	G	
1/2 inch VCR-type male	H	

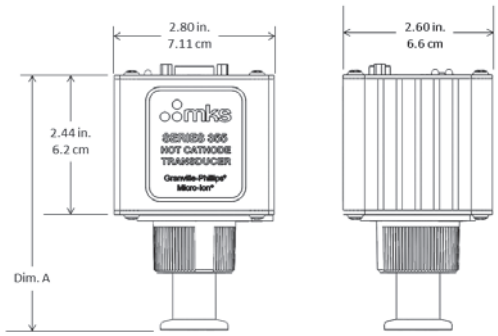

Fitting/Flange	Dimension A	
	Total Height (in)	Total Height (cm)
NW16 KF	4.46	11.33
NW25 KF	4.46	11.33
NW40 KF	4.46	11.33
1.33 in (NW16 CF)	4.45	11.31
2.75 in (NW35 CF)	4.45	11.31
½ in VCR type, male	5.23	13.29

Dimensional Drawing

Note: Unless otherwise specified, dimensions are nominal values in inches (centimeters referenced).

www.MKSINST.com

+1-978-645-5500 | +1-800-227-8766

355_01/20

©2020 MKS Instruments, Inc.
Specifications are subject to change without notice.

MKS products provided subject to the US Export Regulations. Export, re-export, diversion or transfer contrary to US law (and local country law) is prohibited.

Granville-Phillips®, Convectron® and Micro-Ion® are registered trademarks, and mksinst™ is a trademark of MKS Instruments, Inc. Kovar® is a registered trademark of Carpenter Technology Corporation. ConFlat® is a registered trademark of Agilent Technologies. VCR® is a registered trademark of Swagelok Marketing Co. DeviceNet™ is a trademark of the Open DeviceNet Vendor Association.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP