



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)



BradCommunications™ SST™ DeviceNet™ Interfaces provide high-performance control and the support required for your DeviceNet applications.

## 3<sup>rd</sup> Generation SST Interfaces

For Controlling and Monitoring DeviceNet Applications

### Features

- High performance - DeviceNet protocol executed on the card
- Diagnostic LEDs
- UCM (Unconnected Message Manager) capable; Group 1, 2, and 3 dynamic explicit connections supported
- Provides simultaneous execution of Group 2 Client (Master) and Server (Slave) operation
- Supports all DeviceNet standard baud rates: 125, 250, and 500 Kbaud
- Supports Poll, Strobe, Change of State (COS) and Cyclic I/O messaging
- Supports fragmented Explicit and I/O messages
- Provides Client (Master) explicit messaging to slave devices

### OS and Drivers Supported

- Microsoft Windows NT4 / 2000 / XP drivers
- The Console; a grouping of software tools including OPC server configuration and diagnostic tools
- Open, documented memory map interface with example C source code and Windows 32-bit DLLs for custom driver development



BradCommunications SST PCI bus DeviceNet interface



### Overview

BradCommunications SST network interface cards are ideal for applications where high-performance control and reliability are required. Backed by superior support and service, BradCommunications network interfaces support a wide range of network protocols and bus formats.


BradCommunications SST network interface cards for DeviceNet can be found in many applications including:

- Operator Interface
- Human-Machine Interface
- PC Control
- Device Development
- Network Diagnostics


BradCommunications SST network interface cards for DeviceNet undergo DeviceNet conformance testing and support DeviceNet specifications; including all DeviceNet standard baud rates, Poll, Strobe, Change of State (COS) and Cyclic I/O messaging.

### Software Tools


Software available for the SST DeviceNet Interface Cards enables fast integration of industrial communication into your application.



Configuration Console

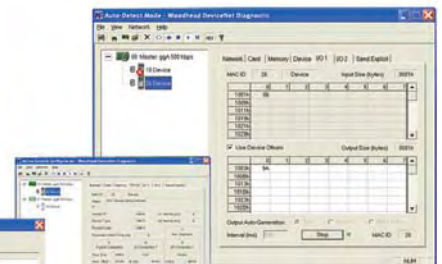

Diagnostic and Test Tools



OPC Browser

**Woodhead**

**BradCommunications™**  
from Woodhead Industries

# SST™ DeviceNet Interfaces



## Hardware Specifications

	PCI	PC/104	VME
<b>Bus Interface</b>	32-bit, 33 MHz, PCI universal 3.3/5V interface (compliant signaling with PCI v2.2)	16-bit PC/104 interface (compliant with PC/104, spec 2.3)	16-bit data, 24-bit address (compliant with VME64 (VITA 1.1 1997))
<b>Processor</b>	66 MHz ColdFire, per channel		
<b>Memory</b>	128 bytes for PCI configuration	256 KB of shared RAM per channel	
<b>Diagnostics</b>	Bi-color LEDs showing card status PCI: health, communication PC/104, VME: power, health, communication		
<b>Interrupts</b>	Hardware Plug & Play (32 Kbytes used per card)	Software selectable level IRQ 2/9,5,7,10,11,12,15; standard TTL drive	DIP switch selectable level IRQ 1-7
<b>Dimensions (LxW)</b>	Standard half-length	9.588 cm x 9.017 cm (3.775 in x 3.550 in)	23.335 cm x 15.9995 cm (9.187 in x 6.299 in)
<b>Consumption</b>	5.2 W	5.0 W	2.5W per channel 1=2.5 W, 2=5 W, 4=10 W
<b>Typical Current Draw</b>	+5V, ± 5 % 1.03 A (2 channel)	+5V, ± 5 %, 1000 mA 2 channel	500 mA per channel, 1=500 mA, 2=1 A, 4=2 A
<b>Voltage Requirements</b>	5 V		
<b>Addressing: Memory</b>	A 256 Kbytes window available per channel	256K in a window of 8K, 16K, 32K, 64K, 128K or 256K bytes on even window boundary between 512K and 1Mb	256K in a window of 8K, 16K, 32K, 64K, 128K or 256K bytes on even window boundary between 0 and 16Mb
<b>Addressing: I/O</b>	8 bytes allocated per channel	8 bytes on any even 8-bit boundary from 200h-2F8h or 600h-6F8h	16 bytes on any odd 16-bit boundary from 0 to 0xfc00
<b>Operating Temperature</b>	0° C (32° F) up to +55° C (131° F)		
<b>Storage Temperature</b>	-40° C (-40° F) up to +85° C (185° F)		
<b>Humidity</b>	5% to 95% non-condensing		
<b>Network Specifications</b>			
<b>Protocol</b>	DeviceNet™ Master – Group 2 Client, Group 2 only Client DeviceNet Slave – Group 2 Server CAN 2.0 B Isolated CAN physical layer on each channel		
<b>Cable</b>	Shielded twisted pair, compatible with target network		
<b>Connector</b>	DeviceNet compliant 5-pin CAN connector		
<b>External Power</b>	11-24 VDC, 50 mA typical		
<b>Isolation</b>	500 V		
<b>Data Rate</b>	Up to 1 Mbaud for CAN 125K, 250K and 500K baud for DeviceNet		
<b>RoHS Compliant</b>	Yes	Coming soon	Coming soon

## Ordering Information

Part Number	Product Description	Other Related Products
SST-DN3-PCU-1	DeviceNet card, Universal PCI bus (3.3V / 5V), 1 channel	IP67 and IP20 DeviceNet Switches Gateway Solutions Cable Assemblies Diagnostic Tools Network Interfaces
SST-DN3-PCU-2	DeviceNet card, Universal PCI bus (3.3V / 5V), 2 channels	
SST-DN3-104-1	DeviceNet card, PC/104, 1 channel	
SST-DN3-104-2	DeviceNet card, PC/104, 2 channels	
SST-DN3-VME-1	DeviceNet card, VME, 1 channel	
SST-DN3-VME-2	DeviceNet card, VME, 2 channels	
SST-DN3-VME-4	DeviceNet card, VME, 4 channels	
SST-DN3-DIA†	DeviceNet diagnostic tool	
SST-DN3-CNF-U	DeviceNet software console with USB key (includes network analyzer)	
SST-DN3-CNF-P	DeviceNet software console with parallel port key (includes network analyzer)	
SST-DN3-OPC	OPC Data Server software (must purchase at least one SST- DN3-CNF)	

† Included with SST-DN3 interface cards

To contact us: [www.woodhead.com](http://www.woodhead.com)

Reference Number: DW2006148 Date Published: June 2006

**Brad Communications™**  
from Woodhead Industries

**North America:** US +1 800 225 7724 -Canada, +1 519 725 5136

**Europe:** France, +33 2 32 96 04 20 – Germany, +49 711 782 3740 – Italy, +39 010 59 30 77 – United Kingdom, +44 1495 356300

**Asia:** China, +86 21-5835-9885 – Singapore, +65-6261-6533 – Japan, +81-3-5791-4621

Brad Communications and SST are trademarks of Woodhead Industries, Inc. © 2006 Woodhead Industries, Inc.

Advanced Technology Group Quality Instrumentation... [cc@art-sof.com](mailto:cc@art-sof.com) SOURCE 1 www.art-sof.com



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)