ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Molex / Woodhead / SST SST-PB3-PCU* at our website: *Click HERE*

BradCommunications™ SST™ PROFIBUS network interfaces provide high-performance control and the support required for your PROFIBUS applications.


24 Feb. 10
DW200578

SST™ PROFIBUS Interfaces

For Controlling and Monitoring PROFIBUS Applications

PCI EXPRESS®

PC/104

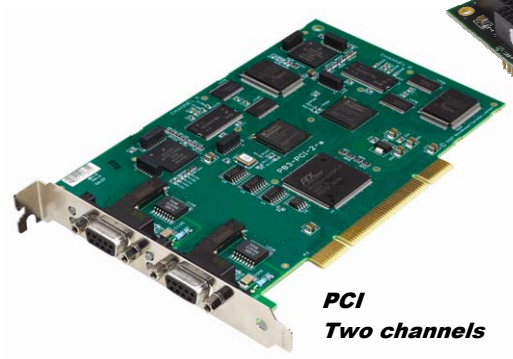

PCI
Two channels

3.3V - 5V
PCI-X
Universal Bus

RoHS CE

BradCommunications™ network interface cards are ideal for applications where high-performance control and reliability are required. Backed by superior support and service, BradCommunications network interfaces support a wide range of network protocols and bus formats.

Features

- PCI/PCIe bus formats available with one and two channels
- Simultaneous execution of PROFIBUS DP Master, DP Slave and FDL (layer 2)
- Master Class 1 and Class 2 DPV1 support through Windows API
- Supports all standard baud rates: 9.6 Kbaud to 12 Mbaud
- Flash memory for storage of configuration
- Supports device configuration and diagnostics through FDT using commDTM
- Supports all PROFIBUS baud rates including 45.45 kbps
- Diagnostic LEDs for system status, watchdog timeout, and communications status

OS and Drivers Supported

- Windows NT4 / 2000 / XP drivers
- DP configuration software with enhanced diagnostics
- OPC Server v3.0
- Open, documented memory map interface with example C source code and Windows 32-bit DLLs for custom driver development

Related Products



BradConnectivity™
Diagnostic
D-Sub Connector

PROFI PROCESS FIELD BUS

FDT CONNECTED


Overview

BradCommunications SST™ network interface cards for PROFIBUS can be found in many applications including:


- Operator interface
- Human-machine interface
- PC control
- Device development
- Network diagnostics

Software Tools


Software tools available for BradCommunications SST PROFIBUS network interface cards enable fast integration of industrial communications into your application.



Configuration Console

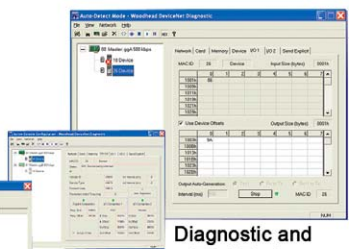

Diagnostic and Test Tools



OPC Browser

BradCommunications™

Woodhead

SST™ PROFIBUS Interfaces



Network Specifications

Protocol	• PROFIBUS Master DP-V0, Class 1 and Class 2 • PROFIBUS Slave DP-V0 • PROFIBUS Master DP-V1, Class 1 and Class 2 • FDL Layer 2
Data Rate	• All PROFIBUS data rates up to 12Mbps
Cable	• Belden 3079A • Brad Harrison® 85-0001 PVR2 conductor with shield, UL-listed
Connector	• DB9 female connector per port/channel • Brad Harrison Diagnostic D-Sub connector part number: MA9D01-42
Isolation	• 1000 V

Hardware Specifications

	PCI / PCI Express	ISA	PC/104
Bus Interface	PCI: Compliant with PCI 2.2 PCI Express: PCI Express 1x, rev 1.0a	Compliant with EISA Specification Version 3.12	Compliant with PC/104 Specification Version 2.3
Processor	ColdFIRE 5272		
Memory	One channel: 256K Window Two channel: 512K Window	Min. 8K Window in host memory map (max. 256K and default 16K)	Min. 8K Window in host memory map (max. 256K and default 16K)
Diagnostics	LEDs for system status and communications status		
Interrupts	Hardware Plug & Play (32 Kbytes used per card)	Software selectable level IRQ 0 through 7	
Dimensions (Length x Width)	6.875 in x 4.2 in (17.463 cm x 10.668 cm)	6.225 in x 4.2 in (15.812 cm x 10.668 cm)	9.588 cm x 9.017 cm (3.775 in x 3.550 in)
Typical Current Draw	600 mA		
Voltage Requirements	5V and 3.3V	5V	
Resources	PCI Region 0=128 bytes PCI memory PCI Region 2=256K of 32-bit PCI memory (one channel) and 512K of 32-bit PCI memory (two channels) PCI Region 3=32 bytes of 32-bit PCI memory One PCI interrupt	ISA Memory Region = 256K of 16-bit ISA memory ISA I/O Region = 8 bytes of ISA I/O memory One ISA interrupt	PC/104 Memory Region = 256K of 16-bit PC/104 memory PC/104 I/O Region = 8 bytes of PC/104 I/O memory One PC/104 interrupt
Operating Temperature	0ºC (32ºF) up to +60ºC (140ºF)		
Storage Temperature	-40ºC (-40F) up to +85ºC (185F)		
Humidity	5% to 95% non-condensing		
RoHS compliant	Yes	Yes	No

Ordering Information

Part Number	SAP	Product Description	Other Related Products
SST-PB3-PCU (E)	1120110021	PROFIBUS card, Universal 3.3V/5V PCI bus (PCI-X compatible), one channel	IP67 and IP20 I/O Gateways Cable Assemblies Diagnostic Tools Network Interfaces
SST-PB3-PCIE-1	1120110031	PROFIBUS card, PCI Express 1x, PCI-X compatible, one channel	
SST-PB3-PCU-2	1120110022	PROFIBUS card, Universal 3.3V/5V PCI bus (PCI-X compatible), two channels	
SST-PB3-PCIE-2	1120110029	PROFIBUS card, PCI Express 1x, two channels	
SST-PB3-104(E)	1120130013	PROFIBUS card, PC/104 bus, one channel	
SST-PB3-ISA (E)	1120120005	PROFIBUS card, ISA bus, one channel	
SST-PB3-CNF-P **SST-PB3-CNF-U** **SST-PB3-OPC**	1120300008 1120300009 1120280030	Configuration Console Application, parallel key Configuration Console Application, USB key OPC Server	

Network Interface

Brad® from molex

To contact us: www.woodhead.com

North America: US: + 1 800 225 7724 – Canada: +1 519 725 5136
Europe: France: +33 2 32 96 04 20 – Germany: +49 7252 94 96 0– Italy: +39 010 59 30 77 – United: Kingdom +44 1495 356300
Asia: Shanghai, China: +86 21-5835-9885 - Tianjin, China: +86 22-23321717
Singapore: +65 6268-6868 – Yamato, Japan: +81 46-265-2428 – Nagoya, Japan: +81 52-221-5950

BradCommunications, BradConnectivity and SST are trademarks of Woodhead Industries. © 2008 Molex Incorporated.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP