

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Emerson / Motorola MCP820* at our website: *Click HERE*

DATASHEET

MOTOROLA

MCP820

CompactPCI Host Slot Processor Board

KEY FEATURES

MPC7410 processor

High-performance L2 cache

High-performance, low-latency SDRAM subsystem

Up to 2GB of ECC protected capacity

New DMA capability

Variety of persistent memory types and capacities

Dual 10/100BaseT Ethernet

Two USB ports (optional)

Two async serial ports, two async/sync serial ports, keyboard and mouse

Single PMC slot

PCI Enhanced IDE (EIDE) controller and floppy disk controller


On-board debug monitor with self-test diagnostics

Four 32-bit timers, three watchdog timers

The MCP820 series provides substantial investment protection to deployed infrastructure by providing an easy upgrade and migration to state-of-the-art features and performance. Utilizing low-power, high-performance MPC7410 processors with 2MB of secondary cache, dual peripheral component interconnect (PCI) buses for the on-board peripherals and a 64-bit bridge to the CompactPCI® interface, the MCP820 series packs optimum performance and functionality in a single CompactPCI slot.

The MCPTM-01 transition module provides industry standard connector access to a single mouse/keyboard connector, EIDE and floppy connectors (internal), one RJ-45 connector and one 10-pin header providing access to the asynchronous serial ports, one PIM, two RJ-45 connectors for rear Ethernet and two additional sync/async serial ports via a single connector.


Designed with relevant standards, compatibility and interoperability in mind, the MCP820 is compliant with PICMG® 2.1 (Hot Swap), VITA 36 (PIM), IEEE 1386.1 (PMC) and Motorola's high availability system architecture specifications. The MCP820 supports booting a complete range of real-time operating systems and kernels which may be purchased from companies such as Wind River Systems, Inc. and other leading providers.

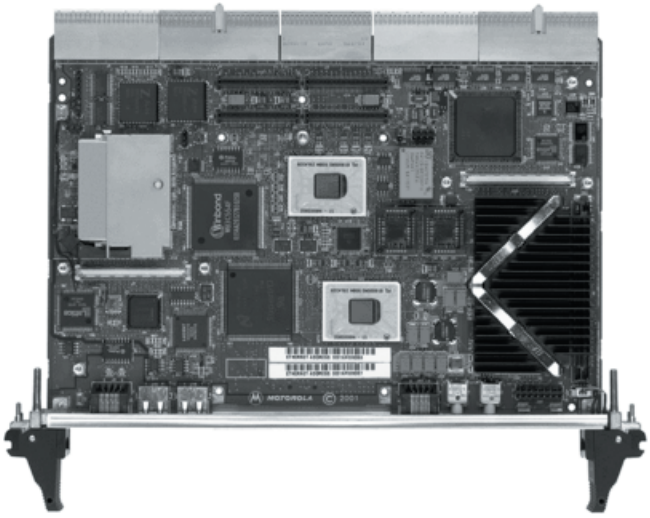

RoHS 0/6 NOT COMPLIANT

See back page for details

The Motorola MCP820 series is a family of CompactPCI host-slot processor modules and the first host-slot modules to benefit from Motorola's PowerPlus III Architecture. The MCP820 series pushes performance and functionality of the PowerPlus Architecture to unprecedented levels.

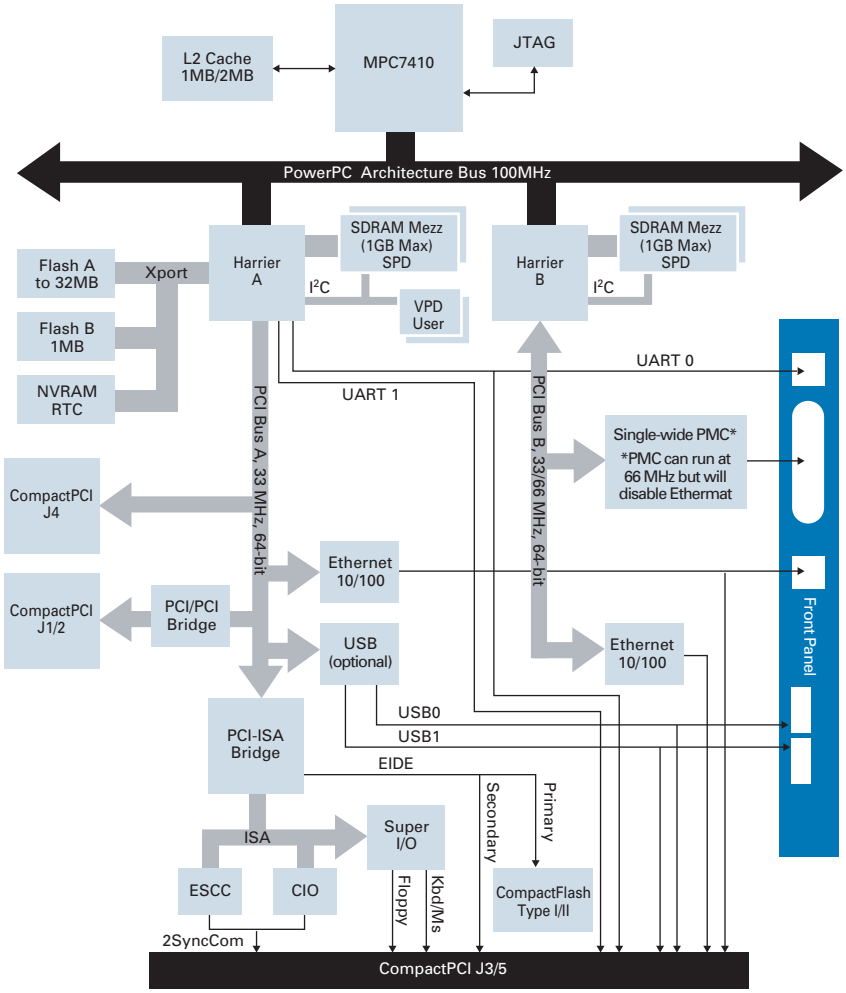

SPECIFICATIONS

PROCESSING SUBSYSTEM

Processor: 500 MHz MPC7410 processor

On-chip L1 Cache (I/D): 32K/32K

High-Performance L2 Cache: 200 MHz parity protected, 2MB

Frontside Bus: 100 MHz

CONTROLLER AND MEMORY SUBSYSTEM

Dynamic Memory: ECC protected synchronous dynamic RAM

Capacity: Up to four RAM500 mezzanines yielding 2GB maximum capacity

Additional Functions: Dual DMA engine—See the Harrier ASIC Programmer's Reference Guide for details; dual multi-processor interrupt controller (MPIC). One DMA engine per Harrier controller.

Single Cycle Accesses: 10 read/5 write

Read Burst Mode: 8-1-1-1 idle; 3-1-1-1 aligned page hit (CL3)

Write Burst Mode: 4-1-1-1 idle; 3-1-1-1 aligned page hit

COMPACTPCI INTERFACE

Controller: Intel® 21154

Address/Data: A32/D32/D64 with parity

PCI Bus Clock: 33/66 MHz, PCI 2.1 compliant

Signaling: 3.3V output, input defined by VIO

ETHERNET INTERFACE

Controller: Dual Intel® 82559ER

Interface Speed: 10/100Mbps

PCI Local bus DMA: Yes, with PCI burst

Connector: One RJ-45 on front panel, one TM port RJ-45 via Jx

PERSISTENT MEMORY

Flash Capacity (bootable): 1MB via two 32-pin PLCC sockets; additional 32MB surface mount; selectable via reset vector

CompactFlash: Single Type I/II memory card socket for large capacity needs (50-pin socket)

Controller: W83C554

Interface: ATA, true IDE mode

NVRAM: 32KB total capacity, 4KB available for user data

Cell Storage Life: 50 years at 55° C

Cell Capacity Life: 10 years at 100% duty cycle

Removable Battery: Yes

SROM/Serial EEPROM: AT93C46 SROMs for Ethernet configuration; two 8KB dual-address I^2C devices for vital product data (VPD) and user configuration data; separate 256 byte standard I^2C serial EEPROMs (on mezzanines) for memory VPD

ASYNCHRONOUS SERIAL PORTS

Controller: PC97317

Number of Ports: Two, 16550-compatible

Configuration: EIA-574-DTE

Async Baud Rate, bps max.: 38.4K EIA-232, 115Kb/s raw

Connector (COM1): Front panel RJ-45, also RJ-45 on MCPTM-01

Connector (COM2): Routed to J3, 10-pin header on MCPTM-01

SYNCHRONOUS SERIAL PORTS

Controller: Z85230/Z8536

Number of Ports: Two

Configuration: TTL to P2 (both ports), SIM on MCPTM-01

Baud Rate, bps max.: 2.5MB sync, 38.4KB async

Oscillator Clock Rate (PCLK): 10 MHz/5 MHz

Connector: Routed to J3, HD-50 on MCPTM-01

EIDE INTERFACE

Controller: W83C554F

Connector: Routed to J5, one 40-pin header on MCPTM-01; plus on-board CompactFlash

USB

Controller: USS312

Connectors: Two Series A receptacles on front panel, also routed to J5

FLOPPY

Controller: PC97317

Compatible Controllers: DP8473, 765A, N82077

Configuration: 3.5" 2.88MB and 1.44MB; 5.25" 1.2MB

Connector: Routed to J3, 34-pin header on MCPTM-01

MOUSE/KEYBOARD INTERFACE

Controller: PC97317

Connector: Routed to J3, 6-pin mini DIN on MCPTM-01

IEEE P1386.1 PCI MEZZANINE CARD SLOT

Address/Data: A32/D32/D64, PMC PN1, PN2, PN3, PN4 connectors

PCI Bus Clock: 33 MHz or 66 MHz

Signaling: 3.3V

Power: +3.3V, +5V, 12V, 7.5 watts maximum per PMC slot

Module Types: Basic, single-wide, front panel I/O or J3 I/O

COUNTERS/TIMERS

TOD Clock Device: MT48T37, 32KB NVRAM

Real-Time Timers/Counters: Four 32-bit programmable

Watchdog Timers: Three, time-out generates reset

POWER REQUIREMENTS

(not including power required by PMC, PIM or SIMs)

	+3.3V ±5%	+5V ±5%	12V ±5%
MCP820-500:	2.6 A typ.	2.8 A typ.	15 mA typ.
	3.5 A max.	3.75 A max.	20 mA max.

BOARD SIZE

Height: 233.4 mm (9.2 in.)

Depth: 160.0 mm (6.3 in.)

Front Panel Height: 261.8 mm (10.3 in.)

Width: 19.8 mm (0.8 in.)

Max. Component Height: 14.8 mm (0.6 in.)

FRONT PANEL DETAIL AND CONTENT

LED Indicators: Board FAIL, CPU Activity and Hot Swap Status

Recessed Switches: Reset and Abort

TRANSITION MODULES

TRANSITION MODULE I/O CONNECTORS

Asynchronous Serial Ports: RJ-45 labeled as COM1

Synchronous Serial Ports: Two (Serial 3 and Serial 4). User configurable via the installation of SIMs. Two 60-pin connectors on planar for installation of two serial interface modules. Single 50-pin external connector with Y-cable adapter.

Mouse/Keyboard: 6-pin circular female mini DIN

Floppy: 34-pin header

EIDE: One 40-pin header

BOARD SIZE

Height: 233.4 mm (9.2 in.)

Depth: 80.0 mm (3.1 in.)

Front Panel Height: 261.8 mm (10.3 in.)

Width: 19.8 mm (0.8 in.)

ALL MODULES

ENVIRONMENTAL

	Operating	Storage/Transit
Temperature:	0° C to +55° C, forced air cooling exit air	–40° C to +85° C
Humidity (NC):	10% to 80%	10% to 90%
Vibration:	0.5 G RMS, 20–2000 Hz random	6.0 Gs RMS, 20–2000 Hz random

DEMONSTRATED MTBF

(based on a sample of eight boards in accelerated stress environment)

Mean: 190,509 hours

95% Confidence: 107,681 hours

SAFETY

All printed wiring boards (PWBs) are manufactured with a flammability rating of 94V-0 by UL recognized manufacturers.

ELECTROMAGNETIC COMPATIBILITY (EMC)

Intended for use in systems meeting the following regulations:

U.S.: FCC Part 15, Subpart B, Class A (non-residential)

Canada: ICES-003, Class A (non-residential)

Motorola board products are tested in a representative system to the following standards, results pending:

CE Mark per European EMC Directive 89/336/EEC with Amendments; Emissions: EN55022 Class B; Immunity: EN55024

ORDERING INFORMATION

Part Number	Description
MCP820-500	500 MHz MPC7410 with support for USB, order memory separate
MCP820-505-CK	500 MHz MPC7410 without support for USB, order memory separate (configurable spare)
Related Products	
MCPTM-01	Transition module: One RJ-45 async serial port connector, one HD-50 sync/async serial port connector (Y-cable splits to two HD-26 connectors), one mouse/keyboard 6-pin mini DIN, PIM
RAM500-005	128MB memory mezzanine, MCP820/MCP765/MVME5100, top
RAM500-015	128MB memory mezzanine, MCP820/MCP765/MVME5100, bottom
RAM500-006	256MB memory mezzanine, MCP820/MCP765/MVME5100, top
RAM500-016	256MB memory mezzanine, MCP820/MCP765/MVME5100, bottom
RAM500-010	512MB memory mezzanine, MCP820/MCP765/MVME5100, top
RAM500-020	512MB memory mezzanine, MCP820/MCP765/MVME5100, bottom
CFLASH-xxx	CompactFlash memory card (where xxx = number of MB)
Documentation	
MCP820A/IH	MCP820 Installation and Use (includes MCPTM-01 information)
MCP820A/PG	MCP820 Programmer's Reference Guide
PPCBUGA1/UM and PPCBUGA2/UM	PPCBug Firmware Package User's Manual, volumes 1 and 2
PPCDIAA/UM	PPCBug Diagnostics Manual
Documentation is available for online viewing and ordering at www.motorola.com/computer/literature	



Future RoHS Status

This product is being redesigned for 5/6 RoHS compliance. When the RoHS compliant version is available, the RoHS designator will be updated accordingly.

SOLUTION SERVICES

Motorola provides a portfolio of solution services optimized to meet your needs throughout the product lifecycle. Design services help speed time-to-market. Deployment services include global 24x7 technical support. Renewal services enable product longevity and technology refresh. And solution extras include enhanced warranty and repairs.

Sales Offices

Tempe, AZ U.S.A. 1 800 759 1107 or +1 602 438 5720
Paris, France +33 1 69 35 25 88
Munich, Germany +49 89 608 14-0
Loughborough, UK +44 1509 634300
Tel Aviv, Israel +972 3 568 4385
Shanghai, China +86 215292 5693
Tokyo, Japan +81 3 5424 3101
Hong Kong, China +852 2966 3209

This document identifies products, their specifications, and their characteristics, which may be suitable for certain applications. It does not constitute an offer to sell or a commitment of present or future availability, and should not be relied upon to state the terms and conditions, including warranties and disclaimers thereof, on which Motorola may sell products. A prospective buyer should exercise its own independent judgment to confirm the suitability of the products for particular applications. Motorola reserves the right to make changes, without notice, to any products or information herein which will, in its sole discretion, improve reliability, function, or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent or other intellectual property rights or under others. This disclaimer extends to any prospective buyer, and it includes Motorola's licensee, licensee's transferees, and licensee's customers and users. Availability of some of the products and services described herein may be restricted in some locations.

MOTOROLA

www.motorola.com/computing

MOTOROLA and the Stylized M Logo are registered in the U.S. Patent and Trademark Office. PICMG and CompactPCI are registered trademarks of the PCI Industrial Computer Manufacturers Group. PowerPC is a trademark of IBM Corp. and used under license. Intel is a registered trademark of Intel Corporation or its subsidiaries in the U.S. and other countries. All other product or service names are the property of their respective owners. © Motorola, Inc. 2005

MCP820-D4 10/05

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP