ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Emerson / Motorola MVME162PA-344SE* at our website: *Click HERE*

MOTOROLA COMPUTER GROUP

Board Level Products

MVME162LX
EMBEDDED CONTROLLER

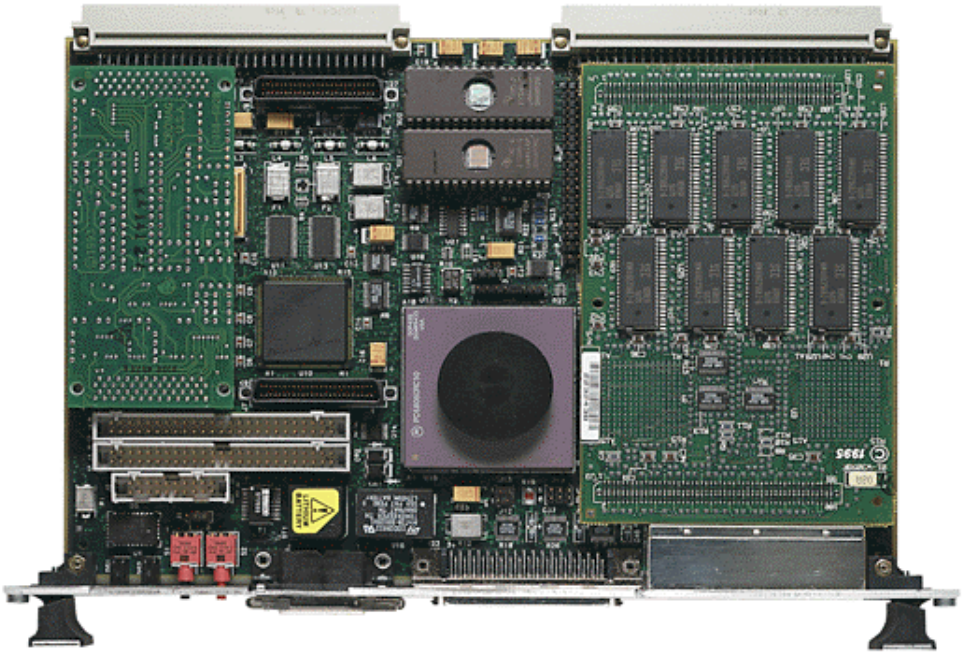

Advantages

The MVME162LX embedded controller provides a powerful and functional CPU which can be customer-configured for specific applications.

The MVME162LX extends the range of solutions provided by the MVME162FX series by boosting the performance level and increasing the number of options. This flexibility allows a user to configure cost-effective solutions ranging from embedded controllers to single-board computers. With the compute power of the MC68040 and the flexibility of the IndustryPack® mezzanine interface, the MVME162LX combines the mechanical ruggedness of VME with the cost-effectiveness of PC-type products.

MOTOROLA

Features

- Choice of processors:
  - 25 MHz or 32 MHz MC68040 enhanced 32-bit microprocessor with 8KB of cache, and MMU and FPU
  - 25 MHz MC68LC040 enhanced 32-bit microprocessor with 8KB of cache and MMU
- Optional VMEchip2 A32/D64 VMEbus master/slave interface with system controller function
- High-performance DMA, supports VMEbus D64 and local bus memory burst cycles
- 4, 8, 16, or 32MB of shared DRAM, parity or error checking and correction (ECC); expandable to 64MB via expansion mezzanines
- 128KB of SRAM with battery backup
- Flash memory for on-board monitor/debugger for user-specified requirements (1MB on MVME162-2*xx*/3*xx* models, 2MB on 7*xx*/8*xx* models)
- 8K x 8 NVRAM and time-of-day clock with battery backup
- Four serial communication ports, configured as EIA-232-D DTE
- Two IndustryPack ports
- Six 32-bit timers (four without VMEbus) and watchdog timer
- Optional SCSI bus interface with 32-bit local bus burst DMA
- Optional Ethernet transceiver interface with 32-bit local bus DMA
- Four 32-pin JEDEC sockets for EPROM and Flash (models MVME162-2*xx*/3*xx* only; 7*xx*/8*xx* models* have only two JEDEC sockets)
- Four-level requester, seven-level interrupter, and seven-level interrupt handler for VMEbus
- Remote Reset/Abort/Status control functions
- On-board debugger and diagnostic firmware

*shown in photo

The Motorola Commitment

Motorola Computer Group is committed to providing best-in-class embedded computing solutions. The MVME162LX series reinforces this commitment by providing superior hardware, price performance and faithfulness to the tenets of open computing: modularity, scalability, portability and interoperability.

Motorola Computer Group is ISO9001 registered, and provides world class quality in manufacturing, engineering, sales, and marketing.

Ordering Information

Part Number	Description
All models include 128KB SRAM with battery backup, Flash memory with MVME162BUG installed, 8K x 8 NVRAM/TOD Clock, four serial ports, two IndustryPack ports, and timers.	
25 MHz MC68LC040	
MVME162-210*y*	4MB DRAM, no SCSI or Ethernet
MVME162-211*y*	4MB DRAM, SCSI only
MVME162-212*y*	4MB DRAM, Ethernet only
MVME162-213*y*	4MB DRAM, SCSI and Ethernet
MVME162-233*y*	4MB ECC DRAM, SCSI and Ethernet
MVME162-322*y*	8MB ECC DRAM, Ethernet only
MVME162-323*y*	8MB ECC DRAM, SCSI and Ethernet
MVME162-253*y*	16MB ECC DRAM, SCSI and Ethernet
25 MHz MC68040	
MVME162-220*y*	4MB DRAM, no SCSI or Ethernet
MVME162-222*y*	4MB DRAM, Ethernet only
MVME162-223*y*	4MB DRAM, SCSI and Ethernet
MVME162-243*y*	4MB ECC DRAM, SCSI and Ethernet
MVME162-333*y*	8MB ECC DRAM, SCSI and Ethernet
MVME162-262*y*	16MB ECC DRAM, Ethernet only
MVME162-263*y*	16MB ECC DRAM, SCSI and Ethernet
MVME162-353*y*	32MB ECC DRAM, SCSI and Ethernet
32 MHz MC68040	
MVME162-723*y*	4MB DRAM, SCSI and Ethernet
MVME162-743*y*	4MB ECC DRAM, SCSI and Ethernet
MVME162-763*y*	16MB ECC DRAM, SCSI and Ethernet
MVME162-813*y*	8MB DRAM, SCSI and Ethernet
MVME162-833*y*	8MB ECC DRAM, SCSI and Ethernet
MVME162-853*y*	32MB ECC DRAM, SCSI and Ethernet
MVME162-863*y*	16MB DRAM, SCSI and Ethernet

DRAM Expansion Memory


MEM162-202*y*	4MB (non-stacking)
MEM162-203*y*	16MB ECC (non-stacking)
MEM162-204*y*	16MB ECC (stacking)
MEM162-207*y*	4MB ECC (non-stacking)
MEM162-208*y*	4MB ECC (stacking)
MEM162-209*y*	8MB ECC (non-stacking)
MEM162-210*y*	8MB ECC (stacking)
MEM162-211*y*	32MB ECC (non-stacking)
MEM162-212*y*	32MB ECC (stacking)

Documentation

68-M162LXSET	User's Manual set
68-1X7DS	Peripheral chipset manuals

Notes

1. As denoted above, *y* indicates a major revision level; for example, "-210A."
2. Firmware source and object modules are available upon request.
3. Non-stacking memory modules must be used as the terminal MVME162 memory module, either alone or on top of a stacking module. A stacking memory module must be used as the first MVME162 memory module and will accept one non-stacking module installed on top of it.
4. Documentation is also available on line at http://www.mcg.mot.com/literature.

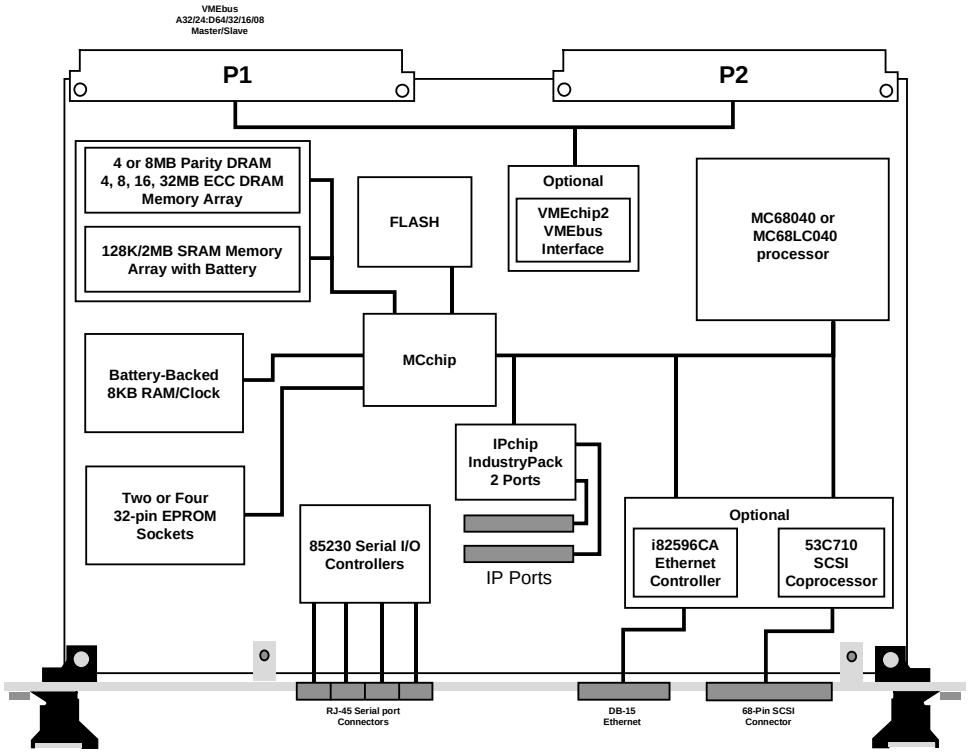

MVME162LX Embedded Controller

IndustryPack Interface

A key feature of the MVME162 is the IndustryPack interface. IndustryPack modules provide a wide variety of connectivity to "real-world" I/O. Expansion is accomplished by means of a mezzanine board mounted to the MVME162. Up to two single-wide IndustryPack modules can be installed on the MVME162LX and still occupy only one VME slot.

VMEbus Interface

VMEbus interface functionality is provided by the Motorola-designed VMEchip2 ASIC. In addition to controlling the system's VMEbus functions, the VMEchip2 includes a local bus to/from VMEbus DMA controller, VME board support features, as well as global control and status register (GCSR) for interprocessor communications. The MVME162LX also provides support for the VME D64 specification within the VMEbus interface, further enhancing system performance.

For deeply embedded applications, versions of the MVME162LX are available without the VMEbus interface. These versions have power and ground connections through the P1 VMEbus connector.

Peripheral Interface

Peripheral I/O connections for the MVME162LX series are located on the front panel of the module. Serial port connection is via four RJ-45 connectors. SCSI devices are interfaced via an industry-standard 68-pin connector. A DB-15 connector is used for Ethernet. IndustryPack modules connect to external I/O devices via 50-pin connectors behind the front panel of the MVME162LX.

Memory Options

The MVME162LX provides users with a variety of data storage options such as DRAM with parity or error checking and correction, EPROM/ROM, Flash and battery-backed SRAM.

Software Support

The MVME162LX is supported by a wide range of real-time kernels and embedded operating systems.

Lynx Real-Time Systems, Inc.:	LynxOS™
Integrated Systems, Inc.:	pSOS+™
Microware Systems Corporation:	OS-9®
Microtec:	VRTX32™
Wind River Systems, Inc.:	VxWorks®

Specifications

MVME162LX Embedded Controller

Processor

Microprocessor:	MC68LC040	MC68040
Clock Frequency:	25 MHz	25 MHz or 32 MHz

Memory

Dynamic RAM

Capacity:	4MB	8MB	16MB
Read Burst Mode:	4-1-1-1	4-2-2-2	4-2-2-2
Write Burst Mode:	3-2-2-2	3-2-2-2	3-2-2-2
Shared:	VMEbus and local bus		

ECC Dynamic RAM

Capacity:	4, 8, 16 or 32 MB
Wait States:	3 read, 0 write
Read Burst Mode:	5-1-1-1
Write Burst Mode:	2-1-1-1
Shared:	VMEbus and local bus

Static Ram

Capacity:	128KB
Read Burst Mode:	5-3-3-3
Write Burst Mode:	5-3-3-3
Parity:	No
Shared:	VMEbus and local bus
Battery Type:	Lithium
Battery Life (approximate):	1,371 days continuous backup at 25° C, 270 days at 70° C

ROM/EPROM (150ns)

Number of Sockets:	
MVME162-2*xx*/3*xx*	Four (512K x 16)
MVME162-7*xx*/8*xx*	Two (512K x 16)
Capacity:	4MB
Access Cycles:	Six read, seven write

Flash (120ns)

Capacity:	
MVME162-2*xx*/3*xx*	1MB
MVME162-7*xx*/8*xx*	2MB
Access Cycles:	Five read, six write

Counters/Timers

Real-Time Timers/Counters:	Six 32-bit, 1 µsec resolution
TOD Clock Device:	8KB NVRAM; M48T08 (2*xx*/3*xx*) or M48T58 (7*xx*/8*xx*)
Watchdog Timer:	Time-out generates Reset

VMEbus ANSI/VITA 1-1994 VME64 (IEEE STD 1014)

DTB Master:	A16–A32; D08–D64, BLT, UAT + MBLT
DTB Slave:	A16–A32; D08–D64, BLT, UAT + MBLT
Arbiter:	RR/PRI
Interrupt Handler:	IRQ 1–7
Interrupt Generator:	Any 1 of 7
System Controller:	Yes, jumperable
Location Monitor:	4, LMA32

IndustryPack Logic Interface

Data Width:	16/32-bit
Interrupts:	Two levels
DMA:	Four channels
Clock Speed:	8 MHz (MVME162-2*xx*/3*xx*), 8 MHz and 32 MHz (MVME162-7*xx*/8*xx*)
Module Types:	Four single-high, two double-high
Transfer Rate-8 MHz:	8MB/sec 16-bit; 16MB/sec 32-bit

SCSI Bus

Controller:	NCR 53C710
Local Bus DMA:	Yes, with local bus burst
Asynchronous:	5.0MB/s
Synchronous:	10.0MB/s

Ethernet

Controller:	82596CA
Local bus DMA:	Yes

Power Requirements (no IP Modules)

	Typical	Maximum
+5V ± 5%:	3.5 A	4.5 A
+12V ± 5%:	—	100 mA (max., with off-board LAN transceiver)
–12V ± 5%:	100 mA	—

Asynchronous Serial Ports

Controller:	85230
Number of Ports:	Four
Configuration:	EIA-232-D DTE (all four ports)
Async Baud Rate:	38.4Kbps max.
Sync Baud Rate:	38.4Kbps max.

Board Size

Height:	233.4 mm (9.2 in.)
Depth:	160.0 mm (6.3 in.)
Front Panel Height:	261.8 mm (10.3 in.)
Width:	19.8 mm (0.8 in.)

Hardware Support

Multiprocessing Hardware Support:	Four mailbox interrupts, RMW, shared RAM
Debug/Monitor:	MVME162FW, boot and diagnostics

Peripheral Connectors

Serial Ports:	Four RJ-45 connectors
Ethernet:	DB-15
SCSI:	68-pin micro D high density
IndustryPack I/O:	Access via two 50-pin connectors

Demonstrated MTBF

Mean/90% Confidence:	190,509 hours/107,681 hours

Environmental

	Operating	Nonoperating
Temperature:	0° C to +70° C, forced air cooling exit air	–40° C to +85° C
Altitude:	5,000 m	15,000 m
Humidity (NC):	5% to 90%	5% to 90%
Vibration:	2 Gs RMS, 20–2000 Hz random	8 Gs RMS, 20–2000 Hz random

Safety

All printed wiring boards (PWBs) are manufactured with a flammability rating of 94V-0 by UL recognized manufacturers.

Electromagnetic Compatibility (EMC)

Intended for use in systems meeting the following regulations:
U.S.: FCC Part 15, Subpart B, Class A (nonresidential)
Canada: ICES-003, Class A (nonresidential)
This product was tested in a representative system to the following standards:
CE Mark per European EMC Directive 89/336/EEC with Amendments; Emissions: EN55022 Class B; Immunity: EN50082-1

For more information, visit our World Wide Web site at **http://www.mcg.mot.com**
To call us dial **1-800-759-1107** in the U.S. and **512-434-1526** outside of the U.S.
Corporate headquarters address: Motorola Computer Group, 2900 S. Diablo Way, Tempe, AZ 85282

Copyright 1997 Motorola, Inc.
Data Sheet: 162LX-D4 4/99

MOTOROLA
Computer Group

Motorola and the Motorola logo are registered trademarks of Motorola, Inc. IndustryPack is a registered trademark of SBS GreenSpring Modular I/O, Inc. All other names, products, and/or services mentioned may be trademarks or registered trademarks of their respective holders.

This data sheet identifies products, their specifications, and their characteristics, which may be suitable for certain applications. It does not constitute an offer to sell or a commitment of present or future availability, and should not be relied upon to state the terms and conditions, including warranties and disclaimers thereof, on which Motorola may sell products. A prospective buyer should exercise its own independent judgement to confirm the suitability of the products for particular applications. Motorola reserves the right to make changes, without notice, to any products or information herein which will, in its sole discretion, improve reliability, function, or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent or other intellectual property rights or under others. This disclaimer extends to any prospective buyer, and it includes Motorola's licensee, licensee's transferees, and licensee's customers and users. Availability of some of the products and services described herein may be restricted in some locations.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP