

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *L-3 / Narda / Miteq 4779-6* at our website: *Click HERE*

DC- 40 GHz

SMA and 2.92 mm Miniature Fixed Attenuators



- Flat Frequency Response
- Low VSWR
- 2 Watt Rating
- Designed to Meet Environmental Requirements of MIL-A-3933
- Precision Stainless Steel SMA Connectors

Specifications

2.92 mm (M/F), DC to 40 GHz, 2 W

FREQUENCY RANGE (GHz)	MODEL	ATTENUATION (dB)			POWER INPUT		VSWR (max.)	WEIGHT (max.)	
		NOMINAL	DEVIATION		AVERAGE (W max.)	PEAK (kW max.)			
			DC-26.5	26.5-40				oz.	gr.
DC-40	4768-3	3	±0.5	±0.8	2	0.2	1.40	0.25	7.5
	4768-6	6	±0.5	±0.8	2	0.2	1.40	0.25	7.5
	4768-10	10	±0.5	±0.8	2	0.2	1.40	0.25	7.5
	4768-20	20	±0.5	±0.8	2	0.2	1.40	0.25	7.5

NOTE:
Temperature Coefficient: 0.0006 dB/dB/°C; Power Coefficient: 0.0005 dB/dB/W

narda microwave-east an L3 company

www.nardamicrowave.com E-MAIL: nardaeast@L-3com.com TEL: +1 631 231-1700

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

SMA (M/F), DC to 18 GHz, 2 W

FREQUENCY RANGE (GHz)	MODEL*	ATTENUATION (dB)			POWER INPUT		VSWR (max.)			WEIGHT (max.)	
		NOMINAL	DEVIATION		AVERAGE (W max.)	PEAK (kW max.)					
			DC-12.4	12.4-18			DC-4	4-12.4	12.4-18	oz.	gr.
DC-18	4779-0	0	±0.3	±0.4	2	0.2	1.15	1.30	1.35	0.5	14
	4779-1	1	±0.3	±0.4	2	0.2	1.15	1.30	1.35	0.5	14
	4779-2	2	±0.3	±0.4	2	0.2	1.15	1.30	1.35	0.5	14
	4779-3	3	±0.3	±0.3	2	0.2	1.15	1.25	1.35	0.5	14
	4779-4	4	±0.3	±0.3	2	0.2	1.15	1.30	1.35	0.5	14
	4779-5	5	±0.3	±0.3	2	0.2	1.15	1.30	1.35	0.5	14
	4779-6	6	±0.3	±0.3	2	0.2	1.15	1.25	1.35	0.5	14
	4779-7	7	±0.4	±0.5	2	0.2	1.15	1.30	1.35	0.5	14
	4779-8	8	±0.4	±0.5	2	0.2	1.15	1.30	1.35	0.5	14
	4779-9	9	±0.4	±0.5	2	0.2	1.15	1.30	1.35	0.5	14
	4779-10	10	±0.3	±0.5	2	0.2	1.15	1.25	1.35	0.5	14
	4779-11	11	±0.5	±0.6	2	0.2	1.15	1.30	1.35	0.5	14
	4779-12	12	±0.5	±0.6	2	0.2	1.15	1.30	1.35	0.5	14
	4779-13	13	±0.5	±0.6	2	0.2	1.15	1.30	1.35	0.5	14
	4779-14	14	±0.5	±0.6	2	0.2	1.15	1.30	1.35	0.5	14
	4779-15	15	±0.5	±0.6	2	0.2	1.15	1.30	1.35	0.5	14
	4779-16	16	±0.5	±0.6	2	0.2	1.15	1.30	1.35	0.5	14
	4779-17	17	±0.5	±0.6	2	0.2	1.15	1.30	1.35	0.5	14
	4779-18	18	±0.5	±0.6	2	0.2	1.15	1.30	1.35	0.5	14
	4779-19	19	±0.5	±0.6	2	0.2	1.15	1.30	1.35	0.5	14
	4779-20	20	±0.5	±0.6	2	0.2	1.15	1.25	1.35	0.5	14
	4779-30	30	±0.8	±1.0	2	0.2	1.15	1.35	1.40	0.5	14
	4779-40	40	±1.2	±1.5	2	0.2	1.15	1.35	1.40	0.5	14
	4779-50	50	±1.2	±1.5	2	0.2	1.15	1.35	1.40	0.5	14
	4779-60	60	±1.2	±1.5	2	0.2	1.15	1.35	1.40	0.5	14

* Standard attenuation values are typically available from stock in the following attenuation values: 3 dB, 6 dB, 10 dB, 20 dB, 30 db.
Non-standard attenuation values are available on a custom order basis. Minimum order quantity may apply. Consult factory for details.

NOTE:
Temperature Coefficient: 0.0006 dB/dB/°C; Power Coefficient: 0.0005 dB/dB/W

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

SMA (M/F), DC to 12.4 GHz, 2 W


FREQUENCY RANGE (GHz)	MODEL	ATTENUATION (dB)		POWER INPUT		VSWR (max.)		WEIGHT (max.)	
		NOMINAL	DEVIATION	AVERAGE (W max.)	PEAK (kW max.)	DC-4	4-12.4	oz.	gr.
DC-12.4	4778-3	3	±0.3	2	0.2	1.15	1.30	0.5	14
	4778-6	6	±0.3	2	0.2	1.15	1.30	0.5	14
	4778-10	10	±0.3	2	0.2	1.15	1.30	0.5	14
	4778-20	20	±0.5	2	0.2	1.15	1.30	0.5	14
	4778-30	30	±0.8	2	0.2	1.15	1.35	0.5	14

SMA (M/F), DC to 6 GHz, 2 W


FREQUENCY RANGE (GHz)	MODEL	ATTENUATION (dB)		POWER INPUT		VSWR (max.)		WEIGHT (max.)	
		NOMINAL	DEVIATION	AVERAGE (W max.)	PEAK (kW max.)	DC-4	4-6	oz.	gr.
DC-6	4772-3	3	±0.3	2	0.2	1.25	1.40	0.5	14
	4772-6	6	±0.3	2	0.2	1.25	1.40	0.5	14
	4772-10	10	±0.3	2	0.2	1.25	1.40	0.5	14
	4772-20	20	±0.3	2	0.2	1.25	1.40	0.5	14
	4772-30	30	±0.5	2	0.2	1.25	1.40	0.5	14

NOTE:
Temperature Coefficient: 0.0006 dB/dB/°C; Power Coefficient: 0.0005 dB/dB/W

Outline Drawings

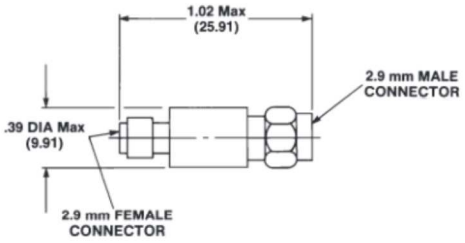

MODEL 4768

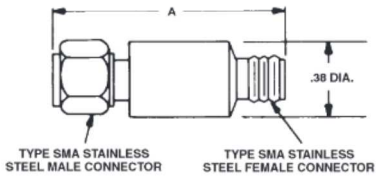

MODEL	A 1-26 dB	A 30-60 dB
4772	1.24	1.49
4778	1.24	1.49
4779	1.24	1.49

Dimensions in inches (mm in parentheses), unless otherwise specified.

narda microwave-east an L3 company

www.nardamicrowave.com E-MAIL: nardaeast@L-3com.com TEL: +1 631 231-1700

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP