ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments NI 9218* at our website: ***Click HERE***

DATASHEET

NI 9218

2 AI, 51.2 kS/s/ch Simultaneous, Universal Measurements



- DSUB or LEMO connectivity
- Built-in support for accelerometer, powered-sensor, full-bridge, and voltage measurements
- Support for half-bridge, quarter-bridge, 60 V, and current measurements with adapters
- 60 VDC, CAT I, channel-to-channel isolation

The NI 9218 is a 2-channel, universal C Series module designed for universal measurements in NI CompactDAQ and CompactRIO systems. The measurement type is selectable per channel, allowing you to perform different measurement types on each channel. The NI 9218 is ideal for creating universal test systems for automotive, off-highway, and data-logging systems.

NI 9218 Kit Contents

NI 9218 with DSUB



- NI 9218 with DSUB
- NI 9218 Getting Started Guide
- 2-Position Micro-Fit Plug and Crimp Terminal Kit

NI 9218 with LEMO



- NI 9218 with LEMO
- NI 9218 Getting Started Guide
- Power Connector

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

NI 9218 Accessories

	NI 9218 with DSUB	NI 9218 with LEMO
		
Screw-Terminal Adapter	NI 9982D (Cabled) NI 9982F (Front-Mounted)	NI 9982L (Cabled)
±20 mA Adapter	NI 9983D (Cabled) NI 9983F (Front-Mounted)	NI 9983L (Cabled)
±60 V Adapter	NI 9987D (Cabled) NI 9987F (Front-Mounted)	NI 9987L (Cabled)
Half-Bridge Adapter	NI 9986D (Cabled) NI 9986F (Front-Mounted)	NI 9986L (Cabled)
120 Ω Quarter-Bridge Adapter	NI 9984D (Cabled) NI 9984F (Front-Mounted)	NI 9984L (Cabled)
350 Ω Quarter-Bridge Adapter	NI 9985D (Cabled) NI 9985F (Front-Mounted)	NI 9985L (Cabled)
Custom Cables	NI 9988D Solder Cup	LEMO Plug
Pigtail I/O Cables	DSUB-to-Pigtail (1 m, 2 m)	LEMO-to-Pigtail (1 m, 2 m)
Power Connectors	2-Pos Micro Fit-to-Pigtail (1m)	—

NI C Series Overview



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

NI provides more than 100 C Series modules for measurement, control, and communication applications. C Series modules can connect to any sensor or bus and allow for high-accuracy measurements that meet the demands of advanced data acquisition and control applications.

- Measurement-specific signal conditioning that connects to an array of sensors and signals
- Isolation options such as bank-to-bank, channel-to-channel, and channel-to-earth ground
- -40 °C to 70 °C temperature range to meet a variety of application and environmental needs
- Hot-swappable

The majority of C Series modules are supported in both CompactRIO and CompactDAQ platforms and you can move modules from one platform to the other with no modification.

CompactRIO



CompactRIO combines an open-embedded architecture with small size, extreme ruggedness, and C Series modules in a platform powered by the NI LabVIEW reconfigurable I/O (RIO) architecture. Each system contains an FPGA for custom timing, triggering, and processing with a wide array of available modular I/O to meet any embedded application requirement.

CompactDAQ

CompactDAQ is a portable, rugged data acquisition platform that integrates connectivity, data acquisition, and signal conditioning into modular I/O for directly interfacing to any sensor or signal. Using CompactDAQ with LabVIEW, you can easily customize how you acquire, analyze, visualize, and manage your measurement data.



Software


LabVIEW Professional Development System for Windows



- Use advanced software tools for large project development
- Generate code automatically using DAQ Assistant and Instrument I/O Assistant
- Use advanced measurement analysis and digital signal processing
- Take advantage of open connectivity with DLLs, ActiveX, and .NET objects
- Build DLLs, executables, and MSI installers


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

NI LabVIEW FPGA Module



- Design FPGA applications for NI RIO hardware
- Program with the same graphical environment used for desktop and real-time applications
- Execute control algorithms with loop rates up to 300 MHz
- Implement custom timing and triggering logic, digital protocols, and DSP algorithms
- Incorporate existing HDL code and third-party IP including Xilinx IP generator functions
- Purchase as part of the LabVIEW Embedded Control and Monitoring Suite


NI LabVIEW Real-Time Module



- Design deterministic real-time applications with LabVIEW graphical programming
- Download to dedicated NI or third-party hardware for reliable execution and a wide selection of I/O
- Take advantage of built-in PID control, signal processing, and analysis functions
- Automatically take advantage of multicore CPUs or set processor affinity manually
- Take advantage of real-time OS, development and debugging support, and board support
- Purchase individually or as part of a LabVIEW suite


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

NI 9218 Circuitry

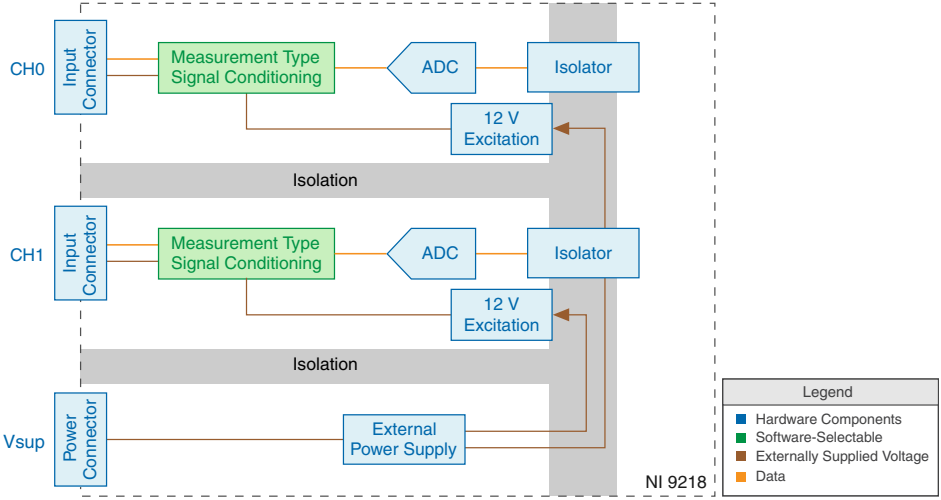

- Two 24-bit analog-to-digital converters (ADCs) simultaneously sample both AI channels.
- The NI 9218 provides channel-to-channel isolation.
- The NI 9218 reconfigures the signal conditioning for each measurement type.
- The NI 9218 provides excitation for IEPE and bridge completion measurement types.
- The NI 9218 can provide optional 12 V sensor excitation for ±16 V, ±65 mV, and ±20 mA measurement types.


±16 V and ±65 mV Signal Conditioning

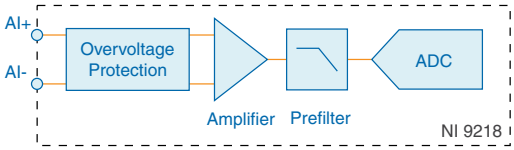

Input signals on each channel are buffered, conditioned, and then sampled by an ADC.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Full-Bridge Signal Conditioning

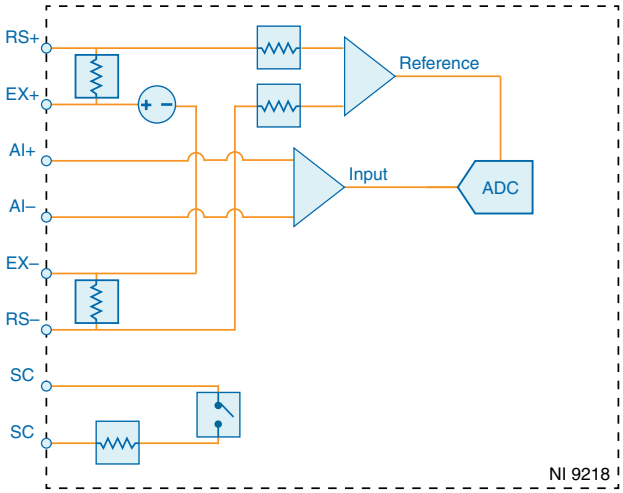

- The analog input connections sense then amplify the incoming analog signal.
- The excitation connections provide differential bridge-excitation voltage.
- Remote sensing continuously and automatically corrects for lead-wire induced excitation voltage loss when using the RS connections.
- Shunt calibration can be used to correct for lead-wire induced desensitization of the bridge.


IEPE Signal Conditioning

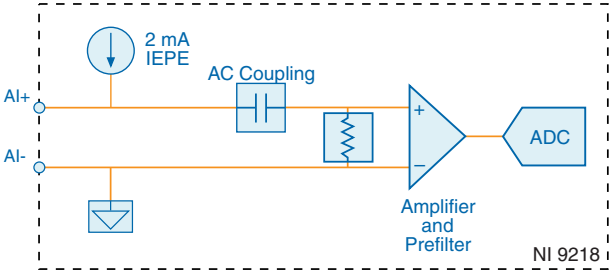

- The incoming analog signal is referenced to an isolated ground.
- Each channel is configured for AC coupling with an IEPE current.
- Each channel provides a TEDS Class 1 interface.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

±20 mA Signal Conditioning

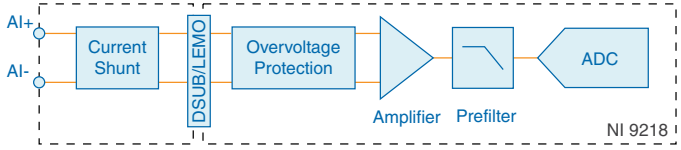


The NI 9983 provides a current shunt for the incoming analog signal.

±60 V Signal Conditioning

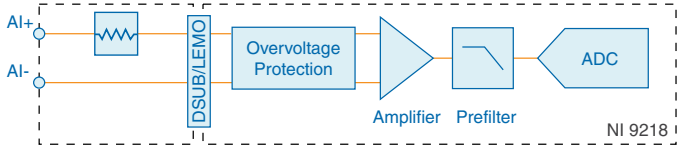

The NI 9987 provides an attenuator for the incoming analog signal.


Half-Bridge Signal Conditioning

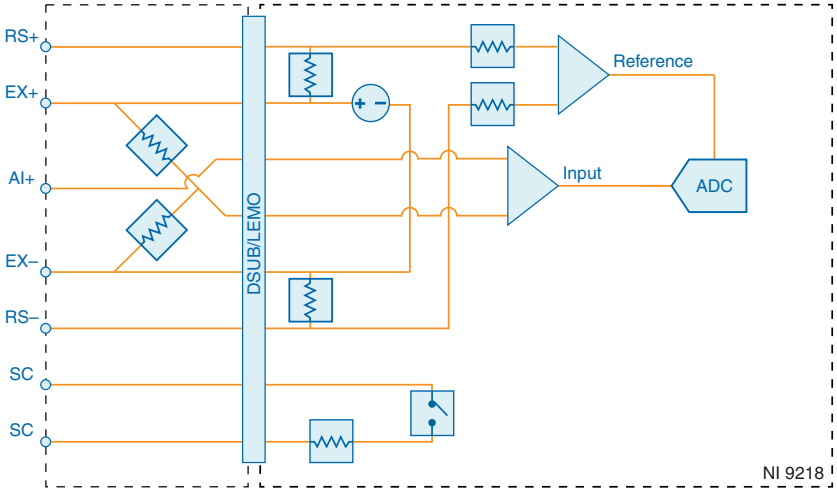

- The NI 9886 provides half bridge completion resistors for the incoming analog signal.
- You must connect AI+, EX+, and EX-.
- RS+ and RS- connections are optional.
- You do not need to connect the AI- signal because it is connected internally.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Quarter-Bridge Mode Conditioning

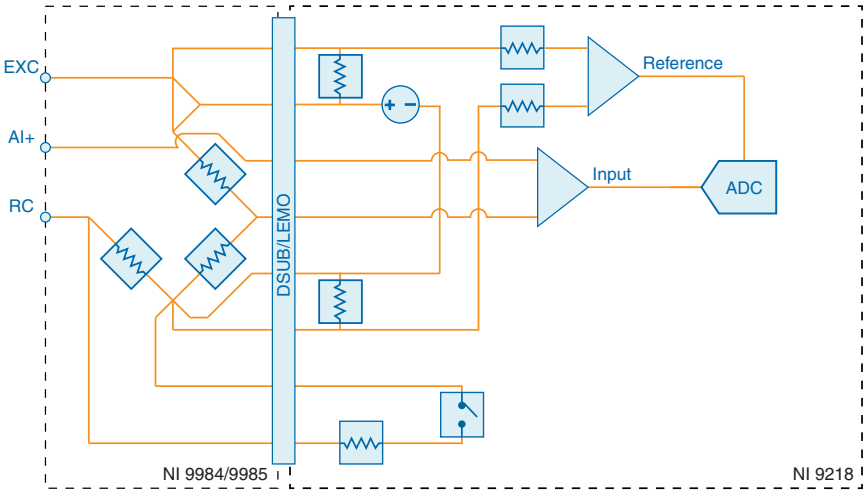

The NI 9984 and NI 9985 provide a quarter-bridge completion resistor and half-bridge completion resistors.

Filtering

The NI 9218 uses a combination of analog and digital filtering to provide an accurate representation of in-band signals while rejecting out-of-band signals. The filters discriminate between signals based on the frequency range, or bandwidth, of the signal. The three important bandwidths to consider are the passband, the stopband, and the alias-free bandwidth.

The NI 9218 represents signals within the passband, as quantified primarily by passband ripple and phase nonlinearity. All signals that appear in the alias-free bandwidth are either unaliased signals or signals that have been filtered by at least the amount of the stopband rejection.

Passband

The signals within the passband have frequency-dependent gain or attenuation. The small amount of variation in gain with respect to frequency is called the passband flatness. The digital filters of the NI 9218 adjust the frequency range of the passband to match the data rate. Therefore, the amount of gain or attenuation at a given frequency depends on the data rate.

Stopband

The filter significantly attenuates all signals above the stopband frequency. The primary goal of the filter is to prevent aliasing. Therefore, the stopband frequency scales precisely with the data rate. The stopband rejection is the minimum amount of attenuation applied by the filter to all signals with frequencies within the stopband.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Alias-Free Bandwidth

Any signal that appears in the alias-free bandwidth of the NI 9218 is not an aliased artifact of signals at a higher frequency. The alias-free bandwidth is defined by the ability of the filter to reject frequencies above the stopband frequency, and it is equal to the data rate minus the stopband frequency.

NI 9218 Specifications

The following specifications are typical for the range -40 °C to 70 °C unless otherwise noted.

Caution Do not operate the NI 9218 in a manner not specified in this document. Product misuse can result in a hazard. You can compromise the safety protection built into the product if the product is damaged in any way. If the product is damaged, return it to NI for repair.

General Characteristics

Number of channels	2 analog input channels
ADC resolution	24 bits
Type of ADC	Delta-Sigma
Sampling mode	Simultaneous
TEDS support	
NI 9218 with DSUB	IEEE 1451.4 TEDS Class 1
NI 9218 with LEMO	IEEE 1451.4 TEDS Class 1 and TEDS Class 2
Internal master timebase (f_M)	
Frequency	13.1072 MHz
Accuracy	100 ppm

Figure 1. Data Rates

$$\frac{f_M \div 256}{n},\ n = 1, 2, \ldots, 31$$

Data rate range (f_s) using internal master timebase	
Minimum	1.652 kS/s
Maximum	51.2 kS/s
Data rate range (f_s) using external master timebase	
Minimum	1 kS/s
Maximum	51.367 kS/s

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Overvoltage protection	
Pin 2 to Pin 3	-20 V to 30 V
Any other pin-to-pin	±30 V

Note Be aware when processing acquisitions that include full-scale data. Full-scale data readings indicate that an over-range has occurred in the analog front-end.

±16 V Characteristics

Input coupling	DC
Measurement range	
Typical	±16.3 V
Minimum	±16.0 V

Table 1. ±16 V Accuracy

Measurement Conditions		Gain Error	Offset Error
Calibrated	Typical, 23 °C ±5 °C	0.08%	0.70 mV
	Maximum, -40 °C to 70 °C	0.20%	9 mV
Uncalibrated[1]	Typical, 23 °C ±5 °C	1.2%	50 mV
	Maximum, -40 °C to 70 °C	2.0%	70 mV

Gain drift	15 ppm/°C
Offset drift	32 µV/°C
Integral non-linearity (INL)	150 µV
Input noise, RMS	
51.2 kS/s	128 µV
25.6 kS/s	107 µV
4.27 kS/s	81 µV
Input impedance	390 kΩ
Input bandwidth, -3 dB	0.49 f_s
Flatness, DC-20 kHz, referred to 1 kHz	
Typical	±30 mdB
Maximum	±50 mdB

[1] Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Phase non-linearity, DC-20 kHz	0.30°
Input delay	(40 + [5/512])/f_s + 5.3 µs
Stopband	
Frequency	0.55 f_s
Rejection	100 dB
Alias-free bandwidth	0.45 f_s
Oversample rate	64 f_s
Rejection at oversample rate (f_s = 51.2 kS/s)	100 dB
Total Harmonic Distortion (THD), 1 kHz, -1 dBFS	-100 dBc
Spurious-Free Dynamic Range (SFDR), 1 kHz, 1 Vrms	101 dB
Crosstalk	
60 Hz, 1 Vrms, common mode	-120 dBFS
1 kHz normal mode, full-scale aggressor	-109 dBFS
CMRR, 60 Hz 1 Vrms-to-earth ground	-120 dBFS
Powered sensor 12 V excitation	
Voltage level	12 V ±5%
Voltage noise, RMS 100 kHz bandwidth	1 mV
Output current	
Typical	50.5 mA
Minimum	46.5 mA
Settling Time (to 1 % of final value after enabling)	200 ms

Related Information

Vsup Power Requirements on page 25

±65 mV Characteristics

Input coupling	DC

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Measurement range	
Typical	73.5 mV
Minimum	72 mV

Table 2. ±65 mV Accuracy

Measurement Conditions		Gain Error	Offset Error
Calibrated	Typical, 23 °C ±5 °C	0.13%	8 µV
	Maximum, -40 °C to 70 °C	0.20%	130 µV
Uncalibrated[2]	Typical, 23 °C ±5 °C	1.2%	300 µV
	Maximum, -40 °C to 70 °C	2.0%	450 µV

Gain drift	10 ppm/°C
Offset drift	320 nV/°C
Input noise, RMS	
51.2 kS/s	4.3 µV
25.6 kS/s	3 µV
4.27 kS/s	1.3 µV
Input impedance	>10 MΩ
Input bandwidth, -3 dB	0.49 f_s
Flatness, DC-20 kHz, referred to 1 kHz	
Typical	-40 mdB to 0 mdB
Maximum	-150 mdB to 20 mdB
Phase non-linearity, DC-20 kHz	0.2°
Input delay	(40 + [5/512])/f_s + 3.9 µs
Stopband	
Frequency	0.55 f_s
Rejection	100 dB
Alias-free bandwidth	0.45 f_s
Oversample rate	64 f_s
Rejection at oversample rate (f_s = 51.2 kS/s)	100 dB

[2] Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Total Harmonic Distortion (THD), 1 kHz, -1 dBFS	-95 dBc
Spurious-Free Dynamic Range (SFDR), 1 kHz, -1 dBFS	95 dB
Crosstalk	
60 Hz, 1 Vrms, common mode	-120 dBFS
1 kHz normal mode, full-scale aggressor	-109 dBFS
CMRR, 60 Hz, 1 Vrms-to-earth ground	-133 dBFS
Powered sensor 12 V excitation	
Voltage level	12 V ±5%
Voltage noise, RMS 100 kHz bandwidth	1 mV
Output current	
Typical	50.5 mA
Minimum	46.5 mA
Settling Time (to 1% of final value after enabling)	200 ms

Related Information

Vsup Power Requirements on page 25

Full-Bridge Characteristics

Input coupling	DC
Measurement range	
Typical	22.1 mV/V
Minimum	21.7 mV/V

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 3. Full-Bridge Accuracy

Measurement Conditions			Gain	Offset	
				Without Offset Null	≤ 90 days, ±5 °C from Offset Null
Calibrated	3.3 V Excitation	Typical, 23 °C ±5 °C	0.10%	2.4 µV/V	0.5 µV/V
		Maximum -40 °C to 70 °C	0.20%	40 µV/V	5 µV/V
	2 V Excitation	Typical, 23 °C ±5 °C	0.10%	30 µV /V	0.8 µV/V
		Maximum -40 °C to 70 °C	0.20%	87 µV/V	8 µV/V
Uncalibrated[3]	3.3 V Excitation	Typical, 23 °C ±5 °C	1.2%	100 µV/V	—
		Maximum -40 °C to 70 °C	2.0%	150 µV/V	—
	2 V Excitation	Typical, 23 °C ±5 °C	1.2%	120 µV/V	—
		Maximum -40 °C to 70 °C	2.0%	200 µV/V	—

Gain drift	10 ppm/°C
Offset drift	
3.3 V excitation	100 nV/V/°C
2 V excitation	160 nV/V/°C

[3] Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 4. Input Noise, RMS

Excitation Voltage	Sample Rate		
	4.27 kS/s	25.6 kS/s	51.2 kS/s
3.3 V	0.4 µV/V	1.0 µV/V	1.3 µV/V
2 V	0.7 µV/V	1.6 µV/V	2.1 µV/V

Differential input impedance	>10 MΩ
Input bandwidth, -3 dB	0.49 f_s
Flatness, DC-20 kHz, referred to 1 kHz	
Typical	-40 mdB to 0 mdB
Maximum	-150 mdB to 20 mdB
Phase non-linearity, DC-20 kHz	0.2°
Input delay	(40 + [5/512])/f_s + 3.9 µs
Stopband	
Frequency	0.55 f_s
Rejection	100 dB
Alias-free bandwidth	0.45 f_s
Oversample rate	64 f_s
Rejection at oversample rate (f_s = 51.2 kS/s)	100 dB
Total Harmonic Distortion (THD), 1 kHz, -1 dBFS	-95 dBc
Spurious-Free Dynamic Range (SFDR), 1 kHz, -1 dBFS	95 dB
Crosstalk	
60 Hz, 1 Vrms, common mode	-120 dBFS
1 kHz, normal mode, full-scale aggressor	-109 dBFS
CMRR, 60 Hz, 1 Vrms-to-earth ground	-133 dBFS
Shunt calibration accuracy	50 kΩ ±0.2%
Strain excitation voltage	
2 V level	2 V ±3%
3.3 V level	3.3 V ±3%

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Output current	
2 V level	17.8 mA
3.3 V level	10.1 mA

IEPE Characteristics

Input coupling	AC
Measurement range	
Typical	5.33 V
Minimum	5.0 V

Table 5. IEPE Accuracy

Measurement Conditions		Gain Error
Calibrated	Typical, 23 °C ±5 °C	0.20% (0.017 dB)
	Maximum, -40 °C to 70 °C	0.40% (0.034 dB)
Uncalibrated[4]	Typical, 23 °C ±5 °C	1.7% (0.146 dB)
	Maximum, -40 °C to 70 °C	2.0% (0.172 dB)

Residual DC offset	<150 mV
Gain drift	25 ppm/°C
Input noise, RMS	
51.2 kS/s	50 µV
25.6 kS/s	38 µV
4.27 kS/s	25 µV
Input impedance	300 kΩ
Input bandwidth, -3 dB	0.49 f_s
Flatness, 10 Hz-20 kHz, referred to 1 kHz	
Typical	±25 mdB
Maximum	±40 mdB
Phase non-linearity, 100 Hz-20 kHz	0.25°
AC cutoff frequency, -3 dB	0.5 Hz
Input delay	(40 + [5/512])/f_s + 3.9 µs

[4] Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Stopband	
Frequency	0.55 f_s
Rejection	100 dB
Alias-free bandwidth	0.45 f_s
Oversample rate	64 f_s
Rejection at oversample rate (f_s = 51.2 kS/s)	100 dB
Total Harmonic Distortion (THD), 1 kHz, -1 dBFS	-102 dBc
Spurious-Free Dynamic Range (SFDR), 1 kHz, 1 Vrms	107 dB
Intermodulation Distortion (IMD), (CCIF 11 kHz/12 kHz)	-97 dB
Crosstalk	
60 Hz, 1 Vrms, common mode	-120 dBFS
1 kHz normal mode, full-scale aggressor	-109 dBFS
CMRR, 60 Hz, 1 Vrms-to-earth ground	-122 dBFS
IEPE excitation current	
Typical	2.2 mA
Minimum	2.1 mA
Compliance voltage	
Typical	20.5 V
Minimum	19.5 V

If you are using an IEPE sensor, use the following equation to ensure that your configuration meets the IEPE compliance voltage range. This equation must resolve to 0 to 19.5.

Figure 2. IEPE Compliance Voltage Equation

$$V_{\text{bias}} \pm V_{\text{full-scale}}$$

where

V_{bias} is the bias voltage of the IEPE sensor

$V_{\text{full-scale}}$ is the full-scale voltage of the IEPE sensor

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

±20 mA Characteristics

The ±20 mA measurement type requires the NI 9983 measurement-specific adapter. The characteristics are for the NI 9218 used in conjunction with the NI 9983.

Input coupling	DC
Measurement range	
Typical	24.4 mA
Minimum	23.0 mA

Table 6. ±20 mA Accuracy

Measurement Conditions		Gain Error	Offset Error
Calibrated	Typical, 23 °C ±5 °C	0.40%	5 µA
	Maximum, -40 °C to 70 °C	0.60%	42 µA
Uncalibrated[5]	Typical, 23 °C ±5 °C	1.5%	100 µA
	Maximum, -40 °C to 70 °C	2.0%	150 µA

Gain drift	35 ppm/°C
Offset drift	105 nA/°C
Shunt resistance	3.01 Ω
Input noise, RMS	
51.2 kS/s	1.4 µA
25.6 kS/s	1.0 µA
4.27 kS/s	0.5 µA
Input impedance	45 Ω ±30%
Input bandwidth, -3 dB	0.49 f_s
Input delay	(40 + [5/512])/f_s + 3.9 µs
Stopband	
Frequency	0.55 f_s
Rejection	100 dB
Alias-free bandwidth	0.45 f_s
Oversample rate	64 f_s

[5] Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Rejection at oversample rate (f_s = 51.2 kS/s)	100 dB
Crosstalk	
60 Hz, 1 Vrms, common mode	-120 dBFS
1 kHz normal mode, full-scale aggressor	-109 dBFS
CMRR, 60 Hz, 1 Vrms-to-earth ground	-99 dBFS
Powered sensor 12 V excitation	
Voltage level	12 V ±5%
Voltage noise, RMS, 100 kHz bandwidth	1 mV
Output current	
Typical	50.5 mA
Minimum	46.5 mA
Settling Time (to 1% of final value after enabling)	200 ms

Related Information

Vsup Power Requirements on page 25

±60 V Characteristics

The ±60 V measurement type requires the NI 9987 measurement-specific adapter. The characteristics are for the NI 9218 used in conjunction with the NI 9987.

Input coupling	DC
Measurement range	
Typical	±62.1 V
Minimum	±60 V

Table 7. ±60 V Accuracy

Measurement Conditions		Gain Error	Offset Error
Calibrated	Typical, 23 °C ±5 °C	0.3%	3 mV
	Maximum, -40 °C to 70 °C	0.6%	40 mV

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 7. ±60 V Accuracy (Continued)

Measurement Conditions		Gain Error	Offset Error
Uncalibrated[6]	Typical, 23 °C ±5 °C	1.3%	200 mV
	Maximum, -40 °C to 70 °C	2.0%	300 mV

Gain drift	30 ppm/°C
Offset drift	120 µV/°C
Integral non-linearity (INL)	15 mV
Input noise, RMS	
51.2 kS/s	500 µV
25.6 kS/s	420 µV
4.27 kS/s	320 µV
Input impedance	1.49 MΩ
Input bandwidth, -3 dB	
NI 9987D/9987L	Lesser of 2.8 kHz or 0.49 f_s
NI 9987F	Lesser of 7 kHz or 0.49 f_s
Flatness, DC to 500 Hz, referred to DC, $f_s \geq 1.652$ kS/s	0.2 dB
Input delay	
NI 9987D	$(40 + [5/512])/f_s + 58.7$ µs
NI 9987L	$(40 + [5/512])/f_s + 57.9$ µs
NI 9987F	$(40 + [5/512])/f_s + 27.2$ µs
Stopband	
Frequency	0.55 f_s
Rejection	100 dB
Alias-free bandwidth	0.45 f_s
Oversample rate	64 f_s
Rejection at oversample rate (f_s = 51.2 kS/s)	100 dB

[6] Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Total Harmonic Distortion (THD), 8 Vrms, 500 Hz	-80 dBc
Spurious-Free Dynamic Range (SFDR), 8 Vrms, 500 Hz	-80 dB
Crosstalk	
60 Hz, 1 Vrms, common mode	-120 dBFS
1 kHz, normal mode, full-scale aggressor	-70 dBFS
CMRR, 60 Hz, 1 Vrms-to-earth ground	-89 dBFS

Half-Bridge Mode Characteristics

The half-bridge measurement type requires the NI 9986 measurement-specific adapter. The characteristics are for the NI 9218 used in conjunction with the NI 9986.

Input coupling	DC
Measurement range	
Typical	22.1 mV/V
Minimum	21.7 mV/V

Table 8. Half-Bridge Accuracy

Measurement Conditions			Gain	Offset	
				Without Offset Null	≤ 90 days, ±5 °C from Offset Null
Calibrated	3.3 V and 2 V excitation	Typical 23 °C ±5 °C	0.10%	700 µV/V	45 µV/V
		Maximum -40 °C to 70 °C	0.20%	1000 µV/V	90 µV/V

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 8. Half-Bridge Accuracy (Continued)

Measurement Conditions			Gain	Offset	
				Without Offset Null	≤ 90 days, ±5 °C from Offset Null
Uncalibrated[7]	3.3 V and 2 V excitation	Typical 23 °C ±5 °C	1.2%	800 µV/V	—
		Maximum -40 °C to 70 °C	2.0%	1.1 mV/V	—

Gain drift	10 ppm/°C
Offset drift	1.3 µV/V/°C

Table 9. Input Noise, RMS

Excitation Voltage	Sample Rate		
	4.27 kS/s	25.6 kS/s	51.2 kS/s
3.3 V	0.4 µV/V	1.0 µV/V	1.3 µV/V
2 V	0.7 µV/V	1.6 µV/V	2.2 µV/V

Input bandwidth, -3 dB	0.49 f_s
Flatness, DC-20 kHz, referred to 1 kHz	
Typical	-40 mdB to 0 mdB
Maximum	-150 mdB to 20 mdB
Phase non-linearity, DC-20 kHz	0.2°
Input delay	(40 + [5/512])/f_s + 3.9 µs
Stopband	
Frequency	0.55 f_s
Rejection	100 dB
Alias-free bandwidth	0.45 f_s
Oversample rate	64 f_s

[7] Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Rejection at oversample rate (f_s = 51.2 kS/s)	100 dB
Total Harmonic Distortion (THD), 1 kHz, -1 dBFS	-95 dBc
Spurious-Free Dynamic Range (SFDR), 1 kHz, -1 dBFS	95 dB
Crosstalk	
60 Hz, 1 Vrms, common mode	-120 dBFS
1 kHz, normal mode, full-scale aggressor	-85 dBFS
CMRR, 60 Hz, 1 Vrms-to-earth ground	-73 dBFS
Strain excitation voltage	
2 V level	2 V ±3%
3.3 V level	3.3 V ±3%
Output current	
2 V level	17.8 mA
3.3 V level	10.1 mA

Quarter-Bridge Characteristics

The quarter-bridge measurement type requires the NI 9984 or NI 9985 measurement-specific adapter. The characteristics are for the NI 9218 used in conjunction with the NI 9984 or the NI 9985.

Input coupling	DC
Measurement range	
Typical	22.1 mV/V
Minimum	21.7 mV/V

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 10. Quarter-Bridge Accuracy

Measurement Conditions			Gain	Offset	
				Without Offset Null	≤ 90 days, ±5 °C from Offset Null
Calibrated	3.3 V and 2 V excitation	Typical 23 °C ±5 °C	0.10%	700 µV/V	45 µV/V
		Maximum -40 °C to 70 °C	0.20%	1000 µV/V	90 µV/V
Uncalibrated[8]	3.3 V and 2 V excitation	Typical 23 °C ±5 °C	1.2%	800 µV/V	—
		Maximum -40 °C to 70 °C	2.0%	1.1 mV/V	—

Gain drift	10 ppm/°C
Offset drift	1.3 µV/V/°C
Quarter-bridge completion resistance	
NI 9984	120 Ω
NI 9985	350 Ω

Table 11. Input Noise, RMS

Excitation Voltage	Sample Rate		
	4.27 kS/s	25.6 kS/s	51.2 kS/s
350 Ω, 3.3 V	0.4 µV/V	1.0 µV/V	1.3 µV/V
120 Ω, 2 V	0.7 µV/V	1.6 µV/V	2.2 µV/V

Input bandwidth, -3dB	0.49 f_s
Flatness, DC-20 kHz, referred to 1 kHz	
Typical	-40 mdB to 0 mdB
Maximum	-150 mdB to 20 mdB
Phase non-linearity, DC-20 kHz	0.2°

[8] Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Input delay	(40 + [5/512])/f_s + 3.9 µs
Stopband	
Frequency	0.55 f_s
Rejection	100 dB
Alias-free bandwidth	0.45 f_s
Oversample rate	64 f_s
Rejection at oversample rate (f_s = 51.2 kS/s)	100 dB
Total Harmonic Distortion (THD), 1 kHz, -1 dBFS	-95 dBc
Spurious-Free Dynamic Range (SFDR), 1 kHz, -1 dBFS	95 dB
Crosstalk	
60 Hz, 1 Vrms, common mode	-120 dBFS
1 kHz, normal mode, full-scale aggressor	-85 dBFS
CMRR, 60 Hz, 1 Vrms-to-earth ground	-73 dBFS
Strain excitation voltage	
2 V level	2 V ±3%
3.3 V level	3.3 V ±3%
Output current	
2 V level	17.8 mA
3.3 V level	10.1 mA

Power Requirements

Maximum power consumption from chassis	
Active mode	900 mW maximum
Sleep mode	500 µW maximum
Maximum thermal dissipation, from -40 °C to 70 °C	
Active mode	1.5 W maximum
Sleep mode	550 mW maximum

Vsup Power Requirements

Vsup input voltage range	9 V to 30 V

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Maximum power consumption from Vsup	
Active mode	2 W maximum
Sleep mode	400 mW maximum

Physical Characteristics

If you need to clean the module, wipe it with a dry towel.

Tip For two-dimensional drawings and three-dimensional models of the C Series module and connectors, visit *ni.com/dimensions* and search by module number.

Weight	
NI 9218 with DSUB	151 g (5.33 oz)
NI 9218 with LEMO	165 g (5.82 oz)

NI 998x Physical Characteristics

Screw-terminal wiring	
Gauge	0.05 mm^2 (30 AWG) to 1.31 mm^2 (16 AWG) copper conductor wire
Wire strip length	6 mm (0.236 in.) of insulation stripped from the end
Temperature rating	80 °C minimum
Wires per screw terminal	One or two wires per screw terminal
Ferrules, single wire	0.25 mm^2 (20 AWG) to 0.52 mm^2 (24 AWG)
Torque for screw terminals	0.2 N · m to 0.25 N · m (1.77 lb · in. to 2.21 lb · in.)
Wire securement	
NI 998xD, NI 998xL securement type	Three collets provided (ranging from 2.2 mm to 5.2 mm in diameter)
Torque for collet nut	1.5 N · m (13.3 lb · in.)
NI 998xF securement type	Zip tie provided
NI 998xD and NI 998xF connector securement	
Securement type	Jackscrews provided
Jackscrew torque	0.4 N · m (3.6 in · lb)
Weight	
NI 998xD, NI 998xL	142 g (5.0 oz) with cable
NI 998xF	34 g (1.2 oz)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

NI 9218 with LEMO Safety Voltages

Connect only voltages that are within the following limits:

Maximum voltage, from any pin to any pin on a single connector[9]	±30 V
Isolation	
Channel-to-channel, channel-to-Vsup, channel-to-earth, Vsup-to-earth (up to 5,000 m)[10]	
Continuous	60 VDC, Measurement Category I
Withstand	1,000 Vrms, verified by a 5 s dielectric withstand test

Caution Any excitation output voltage to earth ground must remain below 60 VDC for each channel. To determine excitation output voltage to earth ground for a channel, add the maximum excitation voltage to the maximum potential on pin 3. The maximum excitation voltages are 2 V +3% and 3.3 V +3% for the bridge excitations, 12 V +5% for the +12 V excitation, and 22 V for the IEPE excitation.

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as *MAINS* voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.

Caution Do not connect the NI 9218 to signals or use for measurements within Measurement Categories II, III, or IV.

Note Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

NI 9218 with DSUB Safety Voltages

Connect only voltages that are within the following limits:

Maximum voltage, from any pin to any pin on a single connector[11]	±30 V

[9] The maximum voltage between pin 2 and pin 3 on a single connector is -20 V to +30 V.

[10] Must use crimp contact LEMO plug (784162-01) to maintain these ratings. Ratings are invalidated if solder version is used.

[11] The maximum voltage between pin 2 and pin 3 on a single connector is -20 V to +30 V.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Isolation	
Channel-to-channel, channel-to-Vsup inputs (up to 5,000 m)	
Continuous	60 VDC, Measurement Category I
Withstand	1,000 Vrms, verified by a 5 s dielectric withstand test
Channel-to-earth ground (up to 3,000 m)	
Continuous	60 VDC, Measurement Category I
Withstand	1,000 Vrms, verified by a 5 s dielectric withstand test
Channel-to-earth ground (up to 5,000 m)	
Continuous	60 VDC, Measurement Category I
Withstand	860 Vrms
Vsup inputs-to-earth ground (up to 5,000 m)	
Continuous	60 VDC, Measurement Category I
Withstand	1,000 Vrms, verified by a 5 s dielectric withstand test

Caution Any excitation output voltage to earth ground must remain below 60 VDC for each channel. To determine excitation output voltage to earth ground for a channel, add the maximum excitation voltage to the maximum potential on pin 3. The maximum excitation voltages are 2 V +3% and 3.3 V +3% for the bridge excitations, 12 V +5% for the +12 V excitation, and 22 V for the IEPE excitation.

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as *MAINS* voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.

Caution Do not connect the NI 9218 to signals or use for measurements within Measurement Categories II, III, or IV.

Note Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Hazardous Locations

U.S. (UL)	Class I, Division 2, Groups A, B, C, D, T4; Class I, Zone 2, AEx nA IIC T4
Canada (C-UL)	Class I, Division 2, Groups A, B, C, D, T4; Class I, Zone 2, Ex nA IIC T4
Europe (ATEX) and International (IECEx)	Ex nA IIC T4 Gc

Safety and Hazardous Locations Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1
- EN 60079-0:2012, EN 60079-15:2010
- IEC 60079-0: Ed 6, IEC 60079-15; Ed 4
- UL 60079-0; Ed 5, UL 60079-15; Ed 3
- CSA 60079-0:2011, CSA 60079-15:2012

Note For UL and other safety certifications, refer to the product label or the *Online Product Certification* section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use; for radio equipment; and for telecommunication terminal equipment:

- EN 61326-1 (IEC 61326-1): Class A emissions; Industrial immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions

Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.

Note For EMC declarations and certifications, and additional information, refer to the *Online Product Certification* section.

CE Compliance CE

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 94/9/EC; Potentially Explosive Atmospheres (ATEX)

Shock and Vibration

To meet these specifications, you must panel mount the system.

Operating vibration	
Random (IEC 60068-2-64)	5 g_{rms}, 10 Hz to 500 Hz
Sinusoidal (IEC 60068-2-6)	5 g, 10 Hz to 500 Hz
Operating shock (IEC 60068-2-27)	30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit *ni.com/certification*, search by model number or product line, and click the appropriate link in the Certification column.

Environmental

Refer to the manual for the chassis you are using for more information about meeting these specifications.

Operating temperature (IEC 60068-2-1, IEC 60068-2-2)	-40 °C to 70 °C
Storage temperature (IEC 60068-2-1, IEC 60068-2-2)	-40 °C to 85 °C
Ingress protection	IP40
Operating humidity (IEC 60068-2-78)	10% RH to 90% RH, noncondensing
Storage humidity (IEC 60068-2-78)	5% RH to 95% RH, noncondensing

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Pollution Degree	2
Maximum altitude	5,000 m

Indoor use only.

NI 998x Environmental

Operating temperature (IEC 60068-2-1)	-40 °C to 70 °C

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at *ni.com/environment*. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)

EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit *ni.com/environment/weee*.

电子信息产品污染控制管理办法（中国 RoHS）

中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令(RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 `ni.com/environment/rohs_china`。(For information about China RoHS compliance, go to `ni.com/environment/rohs_china`.)

Calibration

You can obtain the calibration certificate and information about calibration services for the NI 9218 at *ni.com/calibration*.

Calibration interval	2 years

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help**»**Patents** in your software, the patents.txt file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2016 National Instruments. All rights reserved.

376918A-02 Mar16

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP