

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments NI 9244* at our website: ***Click HERE***

GETTING STARTED GUIDE

NI 9244

3 AI/1 Neutral, 400 Vrms L-N/690 Vrms L-L, 24 Bit, 50 kS/s/ch Simultaneous

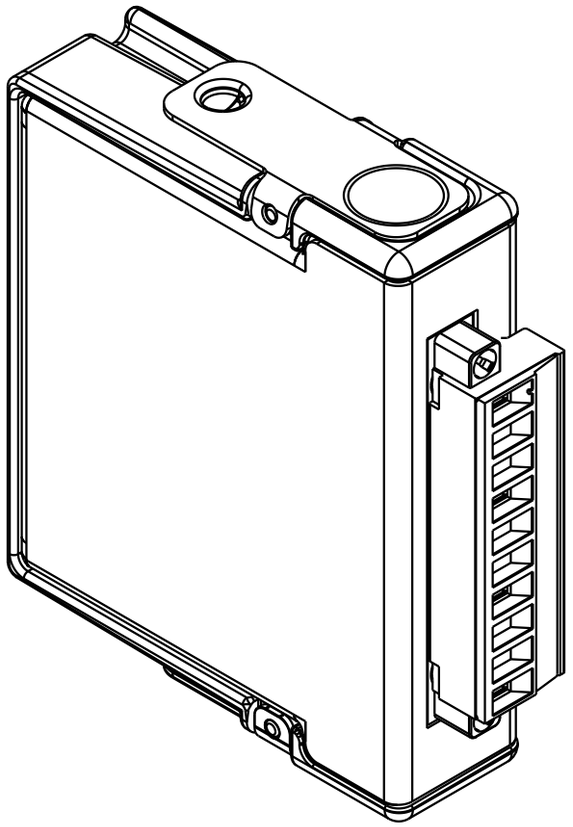

NATIONAL INSTRUMENTS™

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

This document explains how to connect to the NI 9244.



Note Before you begin, complete the software and hardware installation procedures in your chassis documentation.



Note The guidelines in this document are specific to the NI 9244. The other components in the system might not meet the same safety ratings. Refer to the documentation for each component in the system to determine the safety and EMC ratings for the entire system.

Safety Guidelines

Operate the NI 9244 only as described in this document.



Caution Do not operate the NI 9244 in a manner not specified in this document. Product misuse can result in a hazard. You can compromise the safety protection built into the product if the product is damaged in any way. If the product is damaged, return it to NI for repair.

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www



Hazardous Voltage This icon denotes a warning advising you to take precautions to avoid electrical shock.

Safety Voltages

Connect only voltages that are within the following limits.

Maximum working voltage, channel-to-earth ground	
Up to 2,000 m altitude	
Continuous	400 Vrms, Measurement Category III
Up to 5,000 m altitude	
Continuous	400 Vrms, Measurement Category II or 300 Vrms, Measurement Category III
Division 2 and Zone 2 hazardous locations applications	
Channel-to-earth ground	300 Vrms, Measurement Category III

Measurement Category II is for measurements performed on circuits directly connected to the electrical distribution system.

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

This category refers to local-level electrical distribution, such as that provided by a standard wall outlet, for example, 115 V for U.S. or 230 V for Europe.

Measurement Category III is for measurements performed in the building installation at the distribution level. This category refers to measurements on hard-wired hardware such as hardware in fixed installations, distribution boards, and circuit breakers. Other examples are wiring, including cables, bus bars, junction boxes, switches, socket outlets in the fixed installation, and stationary motors with permanent connections to fixed installations.



Caution Do not connect the NI 9244 to signals or use for measurements within Measurement Category IV.

Safety Guidelines for Hazardous Voltages

If hazardous voltages are connected to the device, take the following precautions. A hazardous voltage is a voltage greater than 42.4 Vpk voltage or 60 VDC to earth ground.



Caution Ensure that hazardous voltage wiring is performed only by qualified personnel adhering to local electrical standards.

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

Caution Do not mix hazardous voltage circuits and human-accessible circuits on the same module.

Caution Ensure that devices and circuits connected to the module are properly insulated from human contact.

Caution When module terminals are hazardous voltage LIVE (>42.4 Vpk/60 VDC), you must ensure that devices and circuits connected to the module are properly insulated from human contact. You must use the NI 9969 connector backshell kit to ensure that the terminals are not accessible.

Safety Guidelines for Hazardous Locations

The NI 9244 is suitable for use in Class I, Division 2, Groups A, B, C, D, T4 hazardous locations; Class I, Zone 2, AEx nA IIC T4 and Ex nA IIC T4 hazardous locations; and nonhazardous locations only. Follow these guidelines if you are installing the NI 9244 in a potentially explosive environment. Not following these guidelines may result in serious injury or death.

Caution Do not disconnect I/O-side wires or connectors unless power has been switched off or the area is known to be nonhazardous.

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

Caution Do not remove modules unless power has been switched off or the area is known to be nonhazardous.

Caution Substitution of components may impair suitability for Class I, Division 2.

Caution For Division 2 and Zone 2 applications, install the system in an enclosure rated to at least IP54 as defined by IEC/EN 60079-15.

Special Conditions for Hazardous Locations Use in Europe and Internationally

The NI 9244 has been evaluated as Ex nA IIC T4 Gc equipment under DEMKO Certificate No. 12 ATEX 1202658X and is IECEx UL 14.0089X certified. Each NI 9244 is marked Ex II 3G and is suitable for use in Zone 2 hazardous locations, in ambient temperatures of -40 °C ≤ Ta ≤ 70 °C. If you are using the NI 9244 in Gas Group IIC hazardous locations, you must use the device in an NI chassis that has been evaluated as Ex nC IIC T4, Ex IIC T4, Ex nA IIC T4, or Ex nL IIC T4 equipment.

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

Caution The system shall only be used in an area of not more than Pollution Degree 2, as defined in IEC 60664-1.

Caution The system shall be mounted in an ATEX/IECEx-certified enclosure with a minimum ingress protection rating of at least IP54 as defined in IEC/EN 60079-15.

Caution The enclosure must have a door or cover accessible only by the use of a tool.

Electromagnetic Compatibility Guidelines

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility (EMC) stated in the product specifications. These requirements and limits provide reasonable protection against harmful interference when the product is operated in the intended operational electromagnetic environment.

This product is intended for use in industrial locations. However, harmful interference may occur in some installations, when the product is connected to a peripheral device or test object, or if the

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

product is used in residential or commercial areas. To minimize interference with radio and television reception and prevent unacceptable performance degradation, install and use this product in strict accordance with the instructions in the product documentation.

Furthermore, any changes or modifications to the product not expressly approved by National Instruments could void your authority to operate it under your local regulatory rules.

Special Conditions for Marine Applications

Some products are Lloyd's Register (LR) Type Approved for marine (shipboard) applications. To verify Lloyd's Register certification for a product, visit *ni.com/certification* and search for the LR certificate, or look for the Lloyd's Register mark on the product.



Caution In order to meet the EMC requirements for marine applications, install the product in a shielded enclosure with shielded and/or filtered power and input/output ports. In addition, take precautions when designing, selecting, and installing measurement probes and cables to ensure that the desired EMC performance is attained.

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

Preparing the Environment

Ensure that the environment in which you are using the NI 9244 meets the following specifications.

Operating temperature (IEC 60068-2-1, IEC 60068-2-2)	-40 °C to 70 °C
Operating humidity (IEC 60068-2-78)	10% RH to 90% RH, noncondensing
Pollution Degree	2
Maximum altitude	5,000 m


Indoor use only.



Note Refer to the device datasheet on *ni.com/manuals* for complete specifications.

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

NI 9244 Pinout

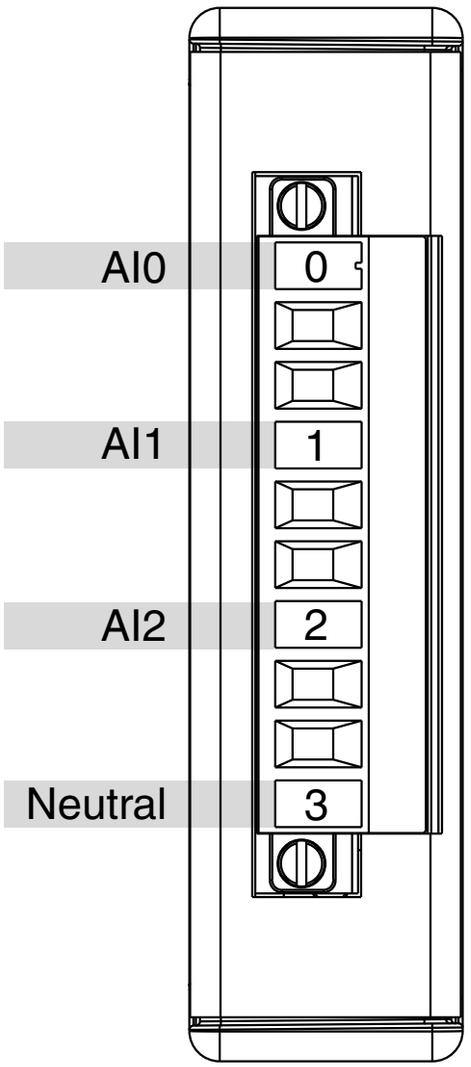

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

Table 1. Signal Descriptions

Signal	Description
AI	Analog input signal connection referenced to the Neutral signal
Neutral	Referenced, single-ended analog input connection

Connecting Phase Measurements


The NI 9244 accepts three-phase and single-phase measurement configuration.

Three-Phase Measurement Configurations

NI recommends the following three-phase connection types.


hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

4-Wire WYE Measurement Configuration

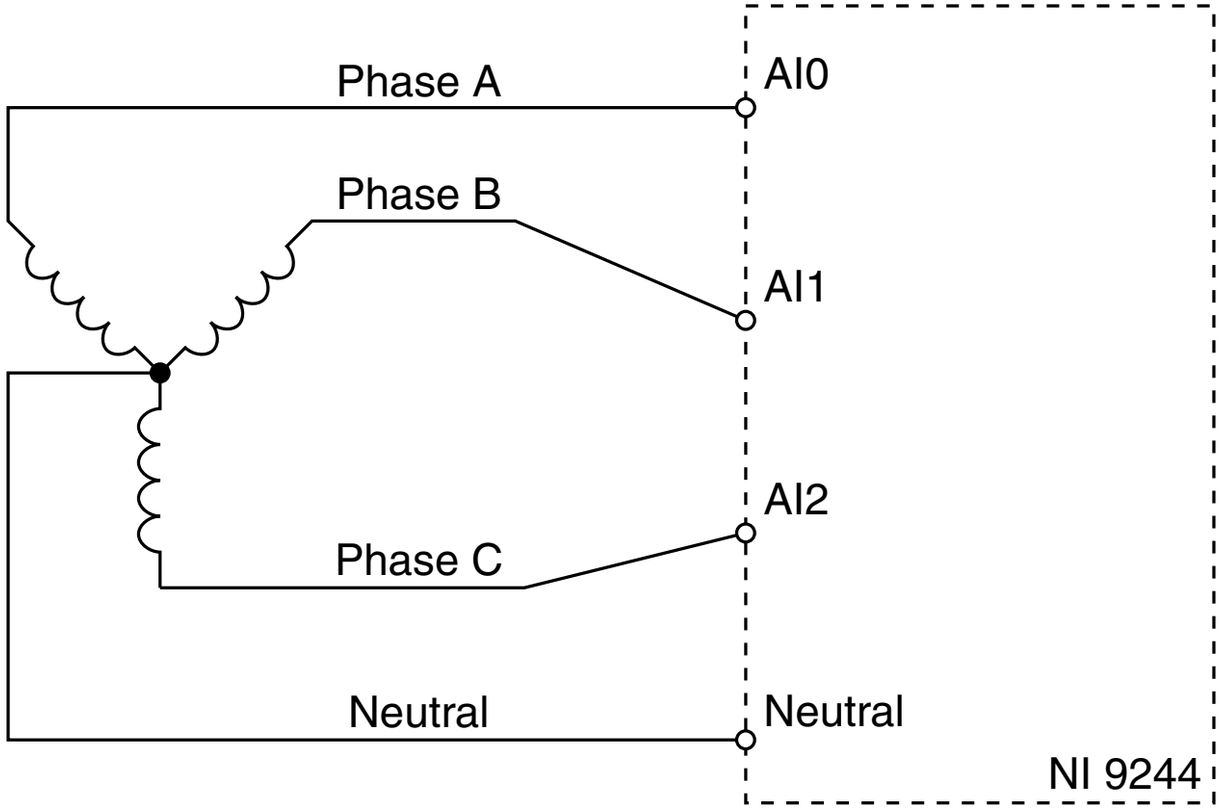


hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

High-Leg Delta Measurement Configuration

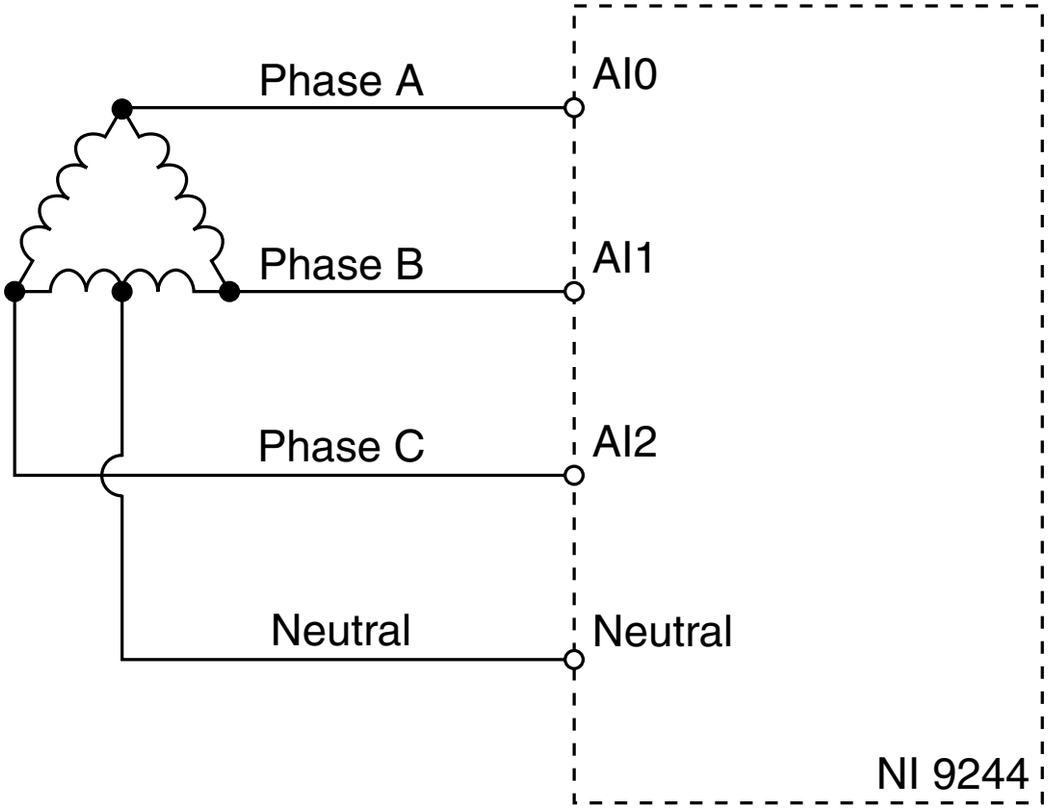


hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

3-Wire Delta Measurement Configuration

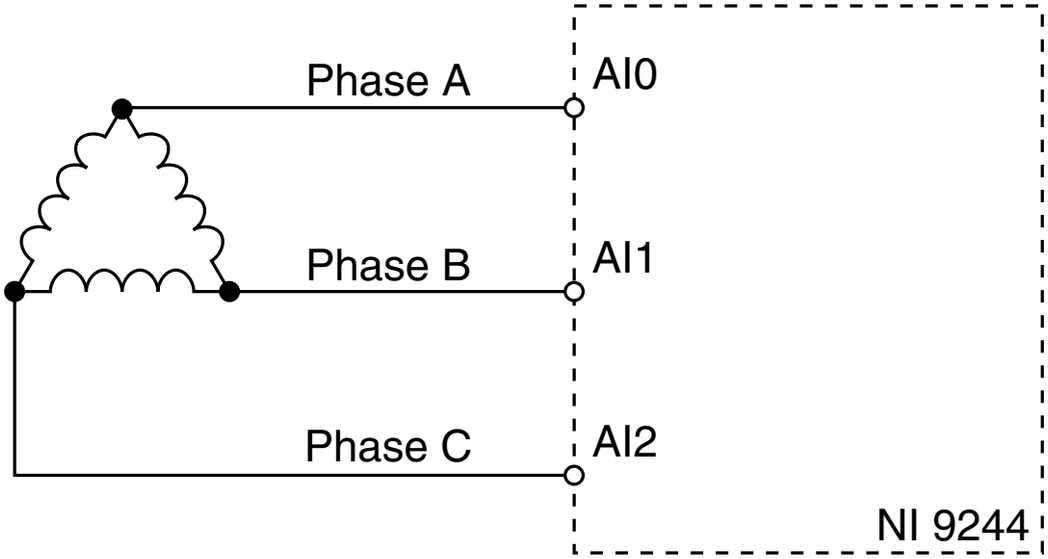

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

Corner Grounded 2-Wire Delta Measurement Configuration

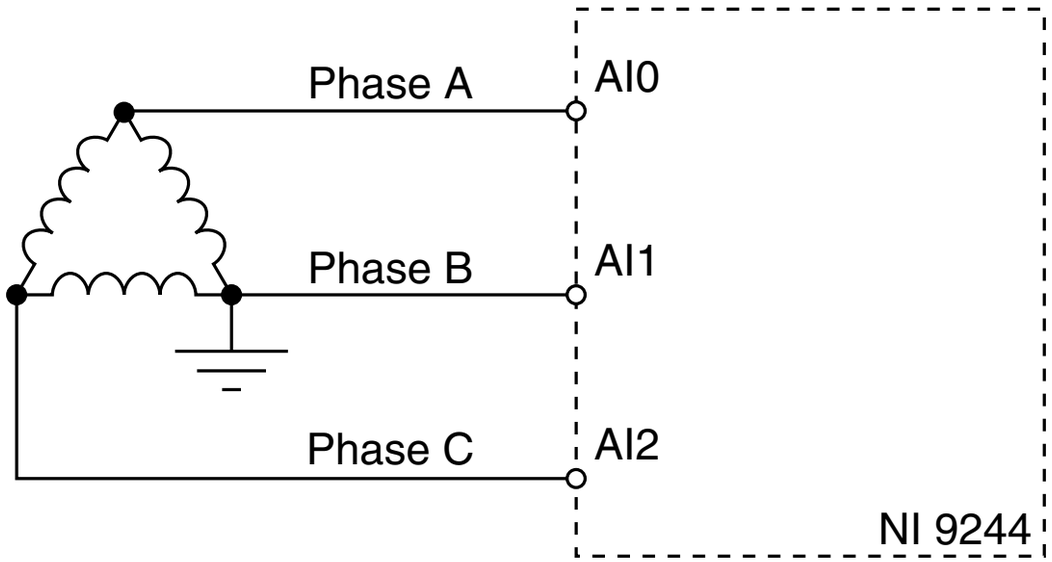


The 9244 cannot measure the entire tolerance range or high crest factor signals on 690 Vrms systems in this configuration.

Connecting Single-Phase Measurement Configurations


NI recommends the following single-phase connection types.

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

3-Wire Measurement (Split Phase) Configuration

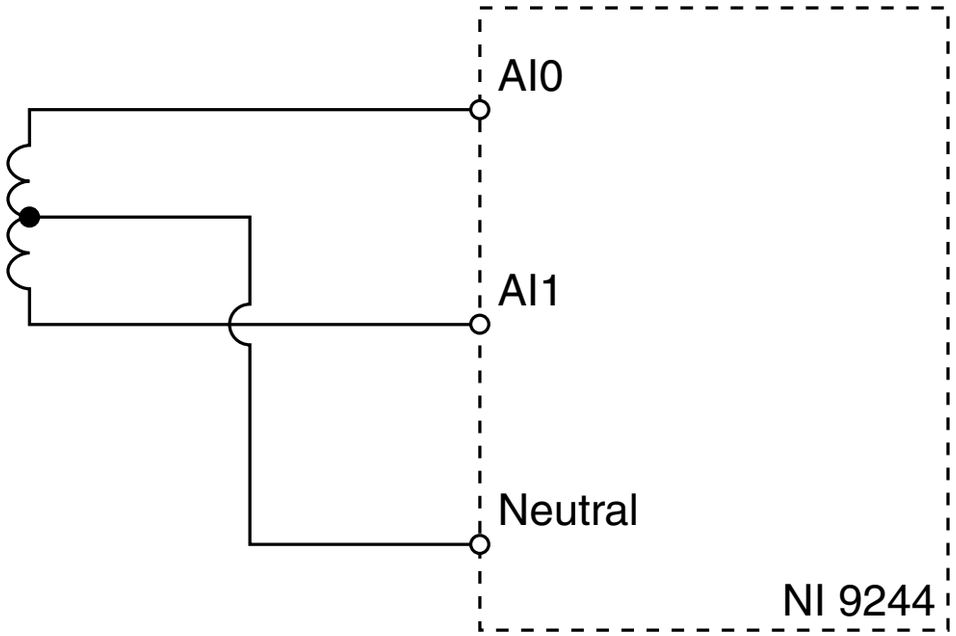

2-Wire Measurement

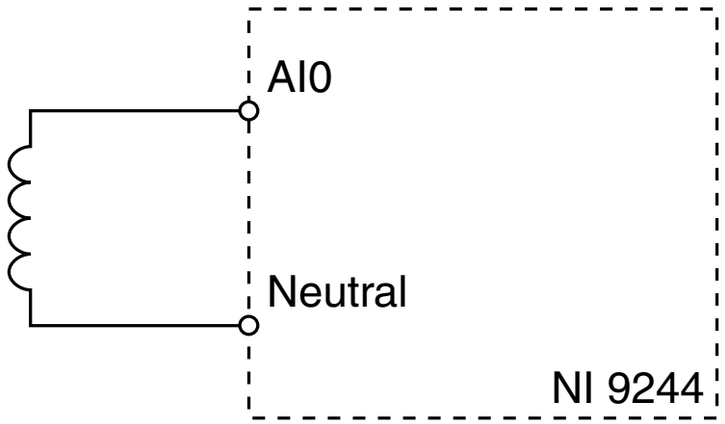

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

Connection Guidelines

- You must use 2-wire ferrules to create a secure connection when connecting more than one wire to a single terminal on the NI 9244.
- Make sure that devices you connect to the NI 9244 are compatible with the module specifications.

To ensure that measurements to chassis ground are correct, NI recommends connecting the chassis to earth ground using the chassis grounding screw. Refer to your chassis manual for information about connecting the chassis to earth ground.

High-Vibration Application Connections

If your application is subject to high vibration, NI recommends that you follow these guidelines to protect connections to the NI 9244:

- Use ferrules to terminate wires to the detachable connector.
- Use the NI 9969 backshell kit.

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

Wiring the NI 9969



Caution For safe operation with hazardous voltages, you must use the NI 9969 Connector Backshell with the 4-terminal connector on the NI 9244.

Complete the appropriate procedure for each wire gauge.


Installing the NI 9969 Using 12 AWG to 14 AWG Wire

What to Use

- NI 9969 backshell
- 12 AWG to 14 AWG wire
- Smallest strain-relief piece
- Screwdriver

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

What to Do

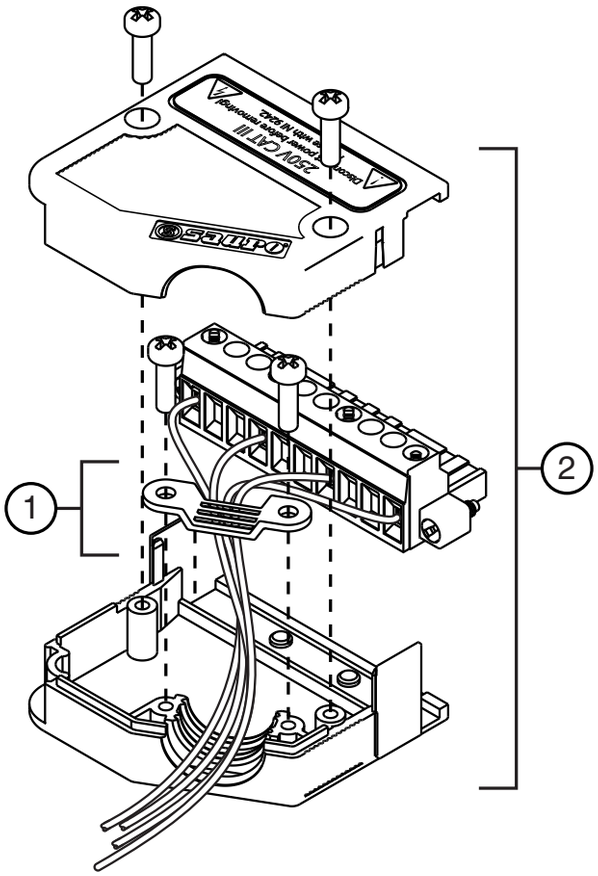

1. Route wires under the smallest strain-relief piece.
2. Secure the smallest strain-relief piece and the backshell in place using captive screws.

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www


Installing the NI 9969 Using 16 AWG Wire

What to Use

- NI 9969 backshell
- 16 AWG wire
- Small and large strain-relief pieces
- Screwdriver

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

What to Do

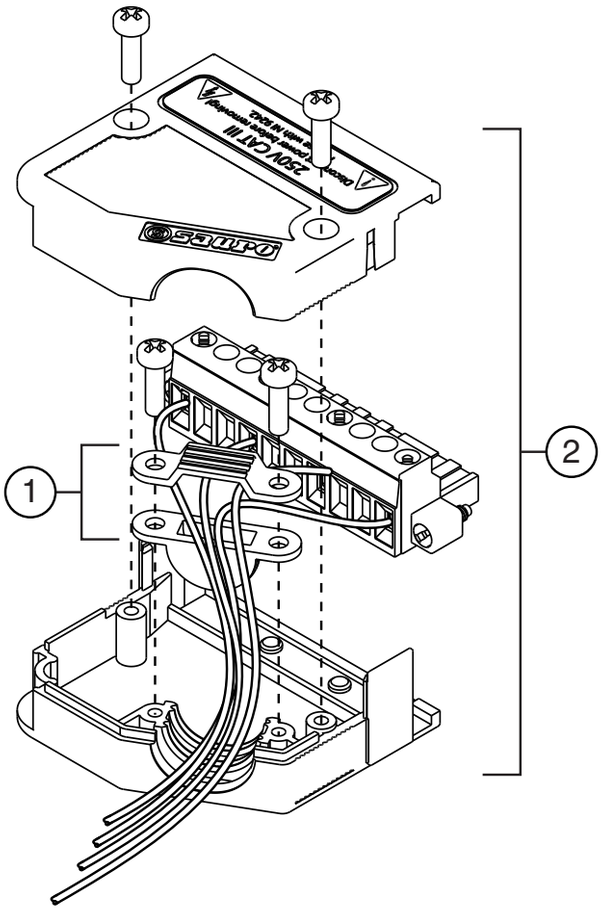

1. Route wires between the two strain-relief pieces, with the small strain-relief piece on top of the wires and the large strain-relief piece underneath the wires.
2. Secure the strain-relief pieces and the backshell in place using captive screws.

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www


Installing the NI 9969 Using 18 AWG to 24 AWG Wire

What to Use

- NI 9969 backshell
- 18 AWG to 24 AWG wire
- Largest strain-relief piece
- Screwdriver

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

What to Do

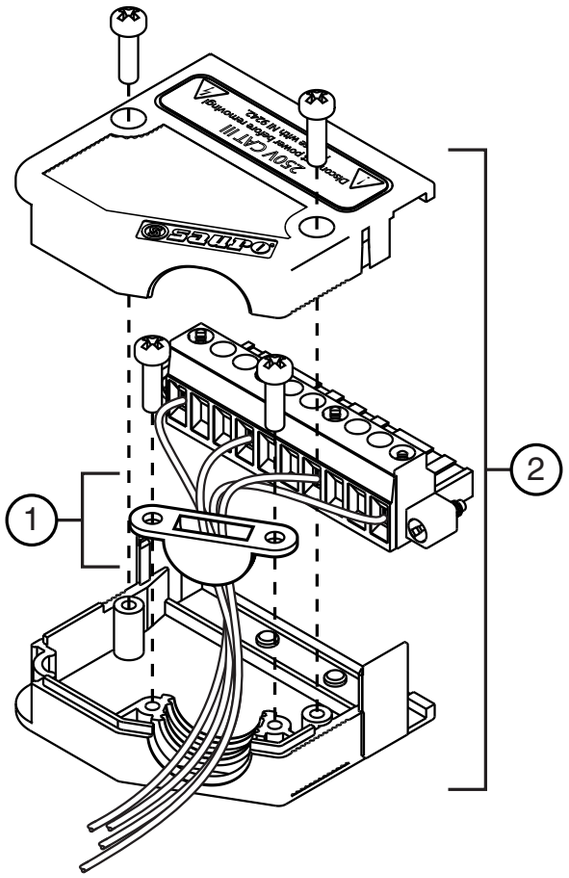

1. Route wires under the largest strain-relief piece.
2. Secure the largest strain-relief piece and the backshell in place using captive screws.

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

Converting L-N Measurements to L-Earth

To convert L-N measurements to L-Earth values, add the neutral channel reading to each AI channel reading.

Refer to the following equation for an example of converting L-N measurements to L-Earth.

Line to Earth = AIx + Neutral

where

AIx is the analog input channel reading

Neutral is the Neutral channel reading

Converting L-N Measurements to L-L

To convert L-N measurements to L-L values, calculate the voltage difference between the AI channels using your application software.

Refer to the following equation for an example of converting L-N measurements to L-L.

Phase A to Phase B Voltage = AI0 - AI1

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

where


AI0 is the reading from Phase A

AI1 is the reading from Phase B

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www


Where to Go Next

CompactRIO



- *NI 9244 Datasheet*
- *NI-RIO Help*
- *LabVIEW FPGA Help*

NI CompactDAQ



- *NI 9244 Datasheet*
- *NI-DAQmx Help*
- *LabVIEW Help*

RELATED INFORMATION

C Series Documentation & Resources
ni.com/info ⇨ cseriesdoc

Services
ni.com/services

Located at ni.com/manuals

Installs with the software

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

Worldwide Support and Services

The NI website is your complete resource for technical support. At *ni.com/support*, you have access to everything from troubleshooting and application development self-help resources to email and phone assistance from NI Application Engineers.

Visit *ni.com/services* for NI Factory Installation Services, repairs, extended warranty, and other services.

Visit *ni.com/register* to register your NI product. Product registration facilitates technical support and ensures that you receive important information updates from NI.

A Declaration of Conformity (DoC) is our claim of compliance with the Council of the European Communities using the manufacturer's declaration of conformity. This system affords the user protection for electromagnetic compatibility (EMC) and product safety. You can obtain the DoC for your product by visiting *ni.com/certification*. If your product supports calibration, you can obtain the calibration certificate for your product at *ni.com/calibration*.

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

NI corporate headquarters is located at
11500 North Mopac Expressway, Austin, Texas, 78759-3504. NI also has offices located around the world. For telephone support in the United States, create your service request at *ni.com/support* or dial 1 866 ASK MYNI (275 6964). For telephone support outside the United States, visit the *Worldwide Offices* section of *ni.com/niglobal* to access the branch office websites, which provide up-to-date contact information, support phone numbers, email addresses, and current events.

Refer to the *NI Trademarks and Logo Guidelines* at `ni.com/trademarks` for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help**»**Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at `ni.com/patents`. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at `ni.com/legal/export-compliance` for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2016 National Instruments. All rights reserved.

376131D-01 Apr16

hnology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP