

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

**Artisan Technology Group**
(217) 352-9330 | sales@artisantg.com | artisantg.com

**Full-service, independent repair center**
with experienced engineers and technicians on staff.

**We buy your excess, underutilized, and idle equipment**
along with credit for buybacks and trade-ins.

**Custom engineering**
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

**Expert team | Trust guarantee | 100% satisfaction**

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments NI 9426* at our website: ***Click HERE***

DATASHEET

# NI 9426

## 32 DI, 30 V, Sourcing, 7 µs




- DSUB connectivity
- 60 VDC, CAT I, channel-to-earth isolation

The NI 9426 is a 32-channel sourcing digital input module for CompactDAQ and CompactRIO systems. The NI 9426 uses an industry-standard 37-pin DSUB connector and works with 24 V industrial logic levels and signals for direct connection to a wide array of industrial devices.

| | |
|---|---|
| **Kit Contents** | • NI 9426<br>• NI 9426 Getting Started Guide |
| **Accessories** | **Front-Mount**<br>• NI 9923 Screw-Terminal Block<br><br>**Cable**<br>• DSUB Cable, 1 m (778621-01) |

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

| C SERIES DIGITAL INPUT MODULE COMPARISON | | | | | | | |
|---|---|---|---|---|---|---|---|
| Product Name | Module Type | Signal Levels | Direction | Channels | Update Rate | Connectivity | Isolation |
| NI 9411 | Digital Input | ±5, 24 V | Sinking/Sourcing Diff/ SE Input | 6 | 500 ns | 15-Pin D-Sub | 60 VDC Ch-Earth |
| NI 9421 | Digital Input | 12, 24 V | Sinking Input | 8 | 100 µs | Screw Terminal, 25-Pin D-Sub | 60 VDC Ch-Earth |
| NI 9422 | Digital Input | 24, 48, 60 V | Sinking/ Sourcing Input | 8 | 250 µs | Screw Terminal | 250 Vrms Ch-Ch |
| NI 9423 | Digital Input | 12, 24 V | Sinking Input | 8 | 1 µs | Screw Terminal | 60 VDC Ch-Earth |
| NI 9425 | Digital Input | 12, 24 V | Sinking Input | 32 | 7 µs | 37-Pin D-Sub | 60 VDC Ch-Earth |
| NI 9426 | Digital Input | 24 V | Sourcing Input | 32 | 7 µs | 37-Pin D-Sub | 60 VDC Ch-Earth |
| NI 9435 | Digital Input | 250 VDC/ VAC | Sinking/ Sourcing Input | 4 | 3 ms | Screw Terminal | 250 Vrms Ch-Earth |
| NI 9436 | Digital Input | 250 VDC/ VAC | Sinking/ Sourcing Input | 8 | 10 ms | Screw Terminal | 250 Vrms Ch-Ch |
| NI 9437 | Digital Input | 24 V to 250 V | Sinking Input | 8 | 1 µs | Screw Terminal | 300 Vrms Ch-Earth |

# NI C Series Overview



NI provides more than 100 C Series modules for measurement, control, and communication applications. C Series modules can connect to any sensor or bus and allow for high-accuracy measurements that meet the demands of advanced data acquisition and control applications.

- Measurement-specific signal conditioning that connects to an array of sensors and signals
- Isolation options such as bank-to-bank, channel-to-channel, and channel-to-earth ground
- -40 °C to 70 °C temperature range to meet a variety of application and environmental needs
- Hot-swappable

The majority of C Series modules are supported in both CompactRIO and CompactDAQ platforms and you can move modules from one platform to the other with no modification.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

# CompactRIO



CompactRIO combines an open-embedded architecture with small size, extreme ruggedness, and C Series modules in a platform powered by the NI LabVIEW reconfigurable I/O (RIO) architecture. Each system contains an FPGA for custom timing, triggering, and processing with a wide array of available modular I/O to meet any embedded application requirement.

# CompactDAQ

CompactDAQ is a portable, rugged data acquisition platform that integrates connectivity, data acquisition, and signal conditioning into modular I/O for directly interfacing to any sensor or signal. Using CompactDAQ with LabVIEW, you can easily customize how you acquire, analyze, visualize, and manage your measurement data.




# Software

### LabVIEW Professional Development System for Windows



- Use advanced software tools for large project development
- Generate code automatically using DAQ Assistant and Instrument I/O Assistant
- Use advanced measurement analysis and digital signal processing
- Take advantage of open connectivity with DLLs, ActiveX, and .NET objects
- Build DLLs, executables, and MSI installers

### NI LabVIEW FPGA Module




- Design FPGA applications for NI RIO hardware
- Program with the same graphical environment used for desktop and real-time applications
- Execute control algorithms with loop rates up to 300 MHz
- Implement custom timing and triggering logic, digital protocols, and DSP algorithms
- Incorporate existing HDL code and third-party IP including Xilinx IP generator functions
- Purchase as part of the LabVIEW Embedded Control and Monitoring Suite




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**NI LabVIEW Real-Time Module**




- Design deterministic real-time applications with LabVIEW graphical programming
- Download to dedicated NI or third-party hardware for reliable execution and a wide selection of I/O
- Take advantage of built-in PID control, signal processing, and analysis functions
- Automatically take advantage of multicore CPUs or set processor affinity manually
- Take advantage of real-time OS, development and debugging support, and board support
- Purchase individually or as part of a LabVIEW suite

# Circuitry

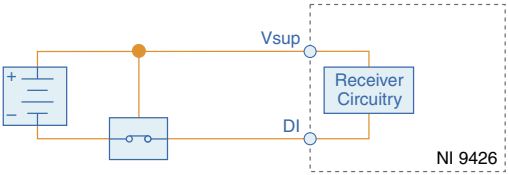


The NI 9426 has sourcing inputs. Sourcing inputs source current from Vsup to the sinking device connected to the NI 9426.

**Tip** For more information about sourcing inputs, visit *ni.com/info* and enter the Info Code `sinksource`.

# NI 9426 Specifications

The following specifications are typical for the range -40 °C to 70 °C unless otherwise noted. All voltages are relative to Vsup unless otherwise noted.

**Caution** Do not operate the NI 9426 in a manner not specified in this document. Product misuse can result in a hazard. You can compromise the safety protection built into the product if the product is damaged in any way. If the product is damaged, return it to NI for repair.

## Input Characterstics

| | |
|---|---|
| Number of channels | 32 digital input channels |
| Input type | Sourcing |



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

| | |
|---|---|
| Digital logic levels | |
| OFF state | |
| Input voltage[1] | ≥ (Vsup - 5 V) |
| Input current | ≤150 µA from DI pin |
| ON state | |
| Input voltage[1] | ≤ (Vsup - 10 V) |
| Input current | ≥330 µA from DI pin |
| Hysteresis | |
| Input voltage | 1.9 V minimum |
| Input current | 65 µA minimum |
| Input impedance | 30 kΩ ±5% |
| I/O protection (Vsup-to-channel) | |
| Input voltage | 30 V maximum |
| Reverse-biased voltage | -30 V maximum |
| Hold time[2] | 0 s minimum |
| Setup time[3] | 1 µs minimum |
| Update/transfer time[4] | 7 µs maximum |
| MTBF | 955,723 hours at 25 °C; Bellcore Issue 2, Method 1, Case 3, Limited Part Stress Method |

## Power Requirements

| | |
|---|---|
| Power consumption from chassis | |
| Active mode | 615 mW maximum |
| Sleep mode[5] | 5 mW maximum |
| Thermal dissipation (at 70 °C) | |
| Active mode | 1.35 W maximum |
| Sleep mode | 1.16 W maximum |

[1] Vsup is the external power supply voltage.
[2] *Hold time* is the amount of time input signals must be stable after initiating a read from the module.
[3] *Setup time* is the amount of time input signals must be stable before reading from the module.
[4] The update/transfer time is valid when the module is used in a CompactRIO system. When used in other systems, driver software and system latencies impact this time.
[5] The external power supply may power the module during sleep mode.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

## Physical Characteristics

If you need to clean the module, wipe it with a dry towel.

**Tip** For two-dimensional drawings and three-dimensional models of the C Series module and connectors, visit *ni.com/dimensions* and search by module number.

| | |
|---|---|
| Weight | 147 g (5.2 oz) |

## Safety Voltages

Connect only voltages that are within the following limits:

| | |
|---|---|
| Vsup-to-channel | 30 VDC maximum |
| Isolation | |
| Channel-to-channel | None |
| Channel-to-earth ground | |
| Continuous | 60 VDC, Measurement Category I |
| Withstand | 1,000 Vrms, verified by a 5 s dielectric withstand test |

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as *MAINS* voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.

**Caution** Do not connect the NI 9426 to signals or use for measurements within Measurement Categories II, III, or IV.

**Note** Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

## Hazardous Locations

| | |
|---|---|
| U.S. (UL) | Class I, Division 2, Groups A, B, C, D, T4; Class I, Zone 2, AEx nA IIC T4 |
| Canada (C-UL) | Class I, Division 2, Groups A, B, C, D, T4; Class I, Zone 2, Ex nA IIC T4 |
| Europe (ATEX) and International (IECEx) | Ex nA IIC T4 Gc |



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

## Safety and Hazardous Locations Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1
- EN 60079-0:2012, EN 60079-15:2010
- IEC 60079-0: Ed 6, IEC 60079-15; Ed 4
- UL 60079-0; Ed 5, UL 60079-15; Ed 3
- CSA 60079-0:2011, CSA 60079-15:2012

**Note** For UL and other safety certifications, refer to the product label or the *Online Product Certification* section.

## Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for sensitive electrical equipment for measurement, control, and laboratory use:

- EN 61326 EMC requirements; Industrial Immunity
- EN 55011 Emissions; Group 1, Class A
- CE, C-Tick, ICES, and FCC Part 15 Emissions; Class A

**Note** For EMC compliance, operate this device with shielded cables.

## CE Compliance CE

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 94/9/EC; Potentially Explosive Atmospheres (ATEX)

## Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit *ni.com/certification*, search by model number or product line, and click the appropriate link in the Certification column.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

## Shock and Vibration

To meet these specifications, you must panel mount the system.

| | |
|---|---|
| Operating vibration | |
| Random (IEC 60068-2-64) | 5 $g_{rms}$, 10 Hz to 500 Hz |
| Sinusoidal (IEC 60068-2-6) | 5 g, 10 Hz to 500 Hz |
| Operating shock (IEC 60068-2-27) | 30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations |

## Environmental

Refer to the manual for the chassis you are using for more information about meeting these specifications.

| | |
|---|---|
| Operating temperature (IEC 60068-2-1, IEC 60068-2-2) | -40 °C to 70 °C |
| Storage temperature (IEC 60068-2-1, IEC 60068-2-2) | -40 °C to 85 °C |
| Ingress protection | IP40 |
| Operating humidity (IEC 60068-2-78) | 10% RH to 90% RH, noncondensing |
| Storage humidity (IEC 60068-2-78) | 5% RH to 95% RH, noncondensing |
| Pollution Degree | 2 |
| Maximum altitude | 2,000 m |

Indoor use only.

## Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at *ni.com/environment*. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

## Waste Electrical and Electronic Equipment (WEEE)

**EU Customers** At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit *ni.com/environment/weee*.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

# 电子信息产品污染控制管理办法（中国 RoHS）



**中国客户** National Instruments 符合中国电子信息产品中限制使用某些有害物质指令(RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help**»**Patents** in your software, the patents.txt file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2007—2016 National Instruments. All rights reserved.

374712A-02 Feb16

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**Artisan Technology Group** is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP