

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments PXIe-2543* at our website: *Click HERE*

NI PXI/PXIe-2543 Specifications

6.6 GHz Dual 4 × 1 Terminated Solid State Multiplexer (Dual SP4T)

このドキュメントには、日本語ページも含まれています。

This document lists specifications for the NI PXI/PXIe-2543 (NI 2543) multiplexer module. All specifications are subject to change without notice. Visit `ni.com/manuals` for the most current specifications.

Topology ..... Dual 4 × 1 multiplexers

Refer to the *NI Switches Help* for detailed topology information.

Caution To ensure the specified EMC performance, operate this product only with shielded cables and accessories.

Caution Device relays might change state momentarily during electrostatic discharge.

Caution Refer to the *Read Me First: Safety and Electromagnetic Compatibility* document at `ni.com/manuals` for important safety and compliance information.

About These Specifications

Specifications characterize the warranted performance of the instrument under the following operating conditions:

- Chassis is powered on
- Calibration adjustment cycle maintained
- 50 Ω termination connected to unused I/O front panel connectors

Typical Specifications are specifications met by the majority of the instruments under the stated operating conditions. Typical specifications are not warranted.

Nominal values (or supplemental information) describe additional information about the product that may be useful, including expected performance that is not covered under *Typical Specifications*. Nominal values are not covered by warranty.

Input Characteristics

All input characteristics are DC, AC_{rms}, or a combination unless otherwise specified.

Minimum input frequency ..... 10 MHz

Characteristic impedance (Z_0) ..... 50 Ω nominal

Coupling ..... AC

Maximum safe DC input voltage ..... ±8V

Maximum Safe Continuous RF Power

Chassis power ON ..... +30 dBm

Chassis power OFF ..... +20 dBm

Note National Instruments recommends against switching active RF signals. As a relay actuates, the channel is momentarily unterminated. Some RF sources can be damaged by reflections if their outputs are not properly terminated. Refer to your RF source documentation for more information.

RF Performance Characteristics

Values in parentheses are typical.

Insertion loss

≤2.4 GHz ..... <4.1 dB (<3.4 dB)

≤6 GHz ..... <5.8 dB (<5.1 dB)

≤6.6 GHz ..... <7.0 dB (<6.1 dB)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Insertion loss thermal coefficient ....α = 2050 ppm/°C

Use the following equation to calculate the insertion loss at a given temperature:

$$IL_T = IL_{T_0}(1 + \alpha(T - T_0))$$

where *IL* represents insertion loss in dB

T represents the temperature at which the property is being measured in °C

T_0 represents the reference temperature in °C

α represents insertion loss temperature coefficient in ppm/°C

Voltage standing wave ratio (VSWR)

≤2.4 GHz.....<1.7 (<1.5)

≤6 GHz.....<1.8 (<1.5)

≤6.6 GHz.....<2.4 (<1.6)

CH–COM Isolation

≤2.4 GHz.....>70 dB (>84 dB)

≤6 GHz.....>61 dB (>74 dB)

≤6.6 GHz.....>59 dB (>72 dB)

CH–CH Isolation

≤2.4 GHz.....>69 dB (>90 dB)

≤6 GHz.....>58 dB (>74 dB)

≤6.6 GHz.....>53 dB (>71 dB)

Typical bank-to-bank crosstalk .....<–90 dB

Typical channel-to-channel skew....<10 ps

Typical propagation delay.....1720 ps

Input 1 dB Compression

Minimum .....>27.6 dBm

Typical .....>32.0 dBm

Refer to Figures 1, 2, and 3 for typical insertion loss, typical VSWR, and typical isolation, respectively.

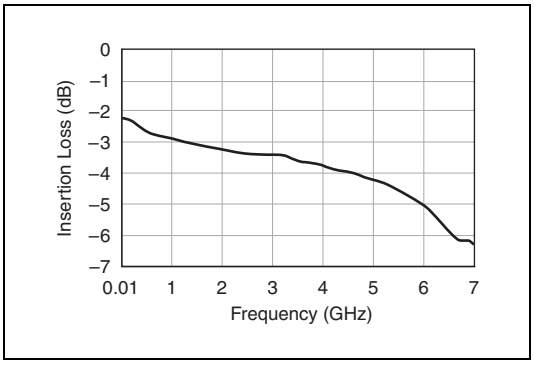


Figure 1. Typical Insertion Loss

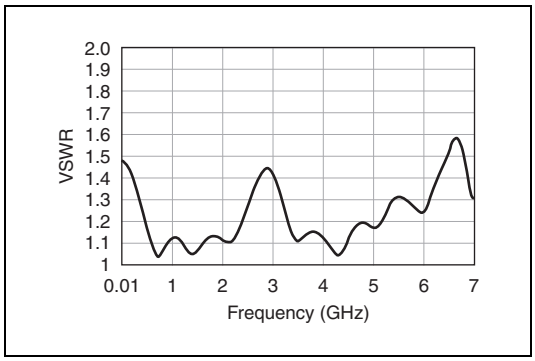


Figure 2. Typical VSWR

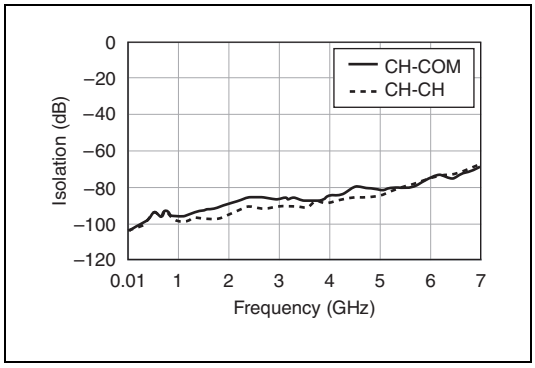


Figure 3. Typical Isolation

Linearity

Second-order harmonic distortion (Input IP2 (IIP2))

Typical IP2 (input)..... >+89 dBm

Note Measurements are performed with single CW tones, ranging from –26 dBm to +10 dBm at the RF input. This specification is based on both experimental and calculated data.

Third-order intermodulation distortion (Input IP3 (IIP3))

Typical IP3 (input)..... >+54 dBm

Note Measurements performed with two 10 dBm input tones = 1 MHz apart. This specification is based on both experimental and calculated data.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Dynamic Characteristics

Maximum switch operate time ..... 76 µs

Note Switch operate time is defined as the time from TRIG IN falling to 10% to when the output reaches 90% of final value.

Note Certain applications may require additional time for proper settling. For information about including additional settling time, refer to the *NI Switches Help*.

Trigger Characteristics

Input trigger

- Sources ..... PXI trigger lines 0–7, Front panel
- Minimum pulse width ..... 150 ns

Note The NI 2543 can recognize trigger pulse widths less than 150 ns by disabling digital filtering. For information about disabling digital filtering, refer to the *NI Switches Help*.

Front panel input voltage

- Minimum ..... –0.5 V
- V_L maximum ..... +0.7 V
- V_H minimum..... +2.0 V
- Nominal ..... +3.3 V
- Maximum ..... +5.5 V

Output trigger

- Destinations ..... PXI trigger lines 0–7, Front panel
- Pulse width ..... Programmable (1 µs to 62 µs)

Front panel nominal voltage 3.3 V TTL, 8 mA

Physical Characteristics

Switch type ..... FET

Front panel connectors..... 10 SMA jacks, female (I/O)
2 SMB jacks, female (Triggers)

PXI power requirement

- PXI..... 0.6 W at 5 V, 0.6 W at 3.3 V
- PXIe..... 0.4 W at 12 V, 1 W at 3.3 V

Dimensions (L × W × H).....3U, one slot, PXI/cPCI module
21.6 × 2.0 × 13.0 cm
(8.5 × 0.8 × 5.1 in.)

Weight .....774 g (27.3 oz)

Environment

Operating temperature.....0 °C to 55 °C

Storage temperature.....–20 °C to 70 °C

Relative humidity .....5% to 85%, noncondensing

Pollution Degree.....2

Maximum altitude .....2,000 m

Indoor use only.

Shock and Vibration

Operational Shock .....30 g peak, half-sine, 11 ms pulse
(Tested in accordance with IEC 60068-2-27. Test profile developed in accordance with MIL-PRF-28800F.)

Random Vibration

- Operating .....5 to 500 Hz, 0.3 g_{rms}
- Nonoperating .....5 to 500 Hz, 2.4 g_{rms}
(Tested in accordance with IEC 60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Accessories

Visit ni.com for more information about the following accessories.

Table 1. NI Accessories for the NI 2543

Accessory	Length	Part Number
SMA 100, SMA male to SMA male flexible cable	0.15 m	763443-01
	0.45 m	763444-01
SMA 50 Ohm termination plug	—	778353-01
RF torque screwdriver and SMA driver bit	—	780895-01
RF SMA driver bit only	—	780894-01

Diagrams

Figure 4 shows the NI 2543 power-on state.

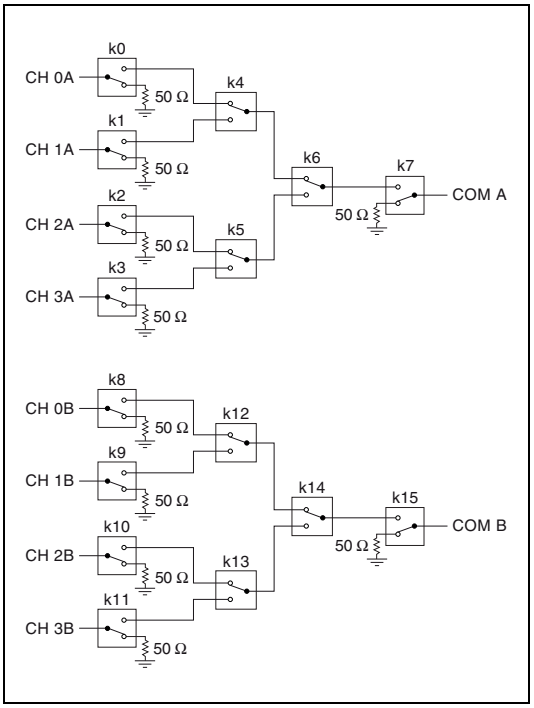


Figure 4. NI 2543 Power-On State

Figure 5 shows the NI 2543 front panel connector.

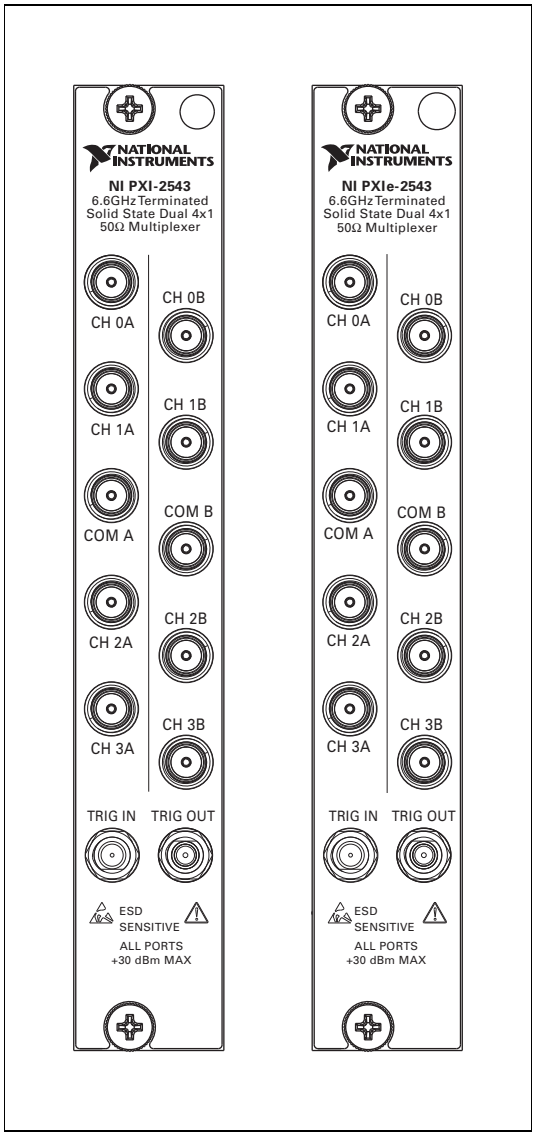


Figure 5. NI 2543 Front Panel Connector

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Compliance and Certifications

Safety

This product meets the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1

Note For UL and other safety certifications, refer to the product label or the *Online Product Certification* section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions

Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.

Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generates radio frequency energy for the treatment of material or inspection/analysis purposes.

Note For EMC declarations and certifications, refer to the *Online Product Certification* section.

CE Compliance CE

This product meets the essential requirements of applicable European Directives as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2004/108/EC; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

To obtain product certifications and the Declaration of Conformity (DoC) for this product, visit `ni.com/certification`, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *NI and the Environment* Web page at `ni.com/environment`. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)

EU Customers At the end of the product life cycle, all products *must* be sent to a WEEE recycling center. For more information about WEEE recycling centers, National Instruments WEEE initiatives, and compliance with WEEE Directive 2002/96/EC on Waste Electrical and Electronic Equipment, visit `ni.com/environment/weee`.

电子信息产品污染控制管理办法 （中国 RoHS）

中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 `ni.com/environment/rohs_china`。(For information about China RoHS compliance, go to `ni.com/environment/rohs_china`.)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

LabVIEW, National Instruments, NI, ni.com, the National Instruments corporate logo, and the Eagle logo are trademarks of National Instruments Corporation. Refer to the *Trademark Information* at `ni.com/trademarks` for other National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at `ni.com/patents`. Refer to the *Export Compliance Information* at `ni.com/legal/export-compliance` for the National Instruments global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data.

© 2011–2012 National Instruments Corporation. All rights reserved.

375773B Feb12

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP