ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments 185856D-02* at our website: ***Click HERE***

1.3 GHz and 4 GHz Multiplexers

NI SCXI-1190, NI PXI-2590, NI SCXI-1191, NI PXI-2591

- 4x1 unterminated multiplexer
- 50 characteristic impedance
- High-bandwidth electromechanical relays
- Excellent insertion loss, VSWR, and isolation specifications
- Fully software programmable

SCXI-1190 (quad 4x1), PXI-2590 (single 4x1)

- 1.3 GHz bandwidth
- SMB direct connectivity
- 1 A at 24 VDC capacity

SCXI-1191 (quad 4x1), PXI-2591 (single 4x1)

- 4 GHz bandwidth
- SMA direct connectivity
- 330 mA at 30 VDC capacity

Operating Systems

- Windows 2000/NT/XP

Recommended Software

- LabVIEW
- LabVIEW Real-Time Module (PXI Modules only)
- LabWindows/CVI
- Measurement Studio
- NI Switch Executive

Other Compatible Software

- Visual Basic
- C/C++

Driver Software (included)

- NI-SWITCH

Compliance

- CE



Overview

The National Instruments PXI-2590 and PXI-2591 are 4x1 high-frequency unterminated multiplexing switches. The NI SCXI-1190 and NI SCXI-1191 perform the same functions as the PXI-2590 and PXI-2591 but also offer a quad 4x1 multiplexing configuration. The switches are capable of switching signals from DC to 1.3 GHz (SCXI-1190 and PXI-2590) and DC to 4 GHz (SCXI-1191 and PXI-2591). The characteristic impedance of the channels is 50 .

For the SCXI-1190 and the PXI-2590, the maximum voltage rating of the switches is 24 V_{rms} with a maximum current of 1 A. For the SCXI-1191 and the PXI-2591, the maximum voltage rating is 30 V_{rms} with a maximum current of 330 mA. All are well suited for applications that require the routing of high-frequency signals inside automated test equipment (ATE) systems because they can switch signals with a very low insertion loss. In addition, the excellent voltage standing-wave ratio (VSWR) and isolation parameters make these modules the perfect choice in a system geared to high-frequency applications as shown in Table 1.

Extended Features and Specifications

National Instruments switch modules are built with a number of core features that are covered in detail in the Switch Overview section.

For additional information about the PXI-2590, PXI-2591, SCXI-1190, and SCXI-1191, including software, certifications and compliance, relay control, etc., please see page 20. For detailed specifications, please see page 504.

Ordering Information

NI SCXI-1190 776572-90
NI PXI-2590 777987-01
NI SCXI-1191 776572-91
NI PXI-2591 778339-01

Includes switch module and NI-SWITCH driver software.

For information on extended warranty and value added services, see page 20.
See page 499 for accessory and cable information.

BUY ONLINE!

*Visit **ni.com/products** and enter pxi2590, pxi2591, scxi1190, and/or scxi1191.*


Module	Insertion Loss	VSWR
SCXI-1190, PXI-2590 (@ 1.3 GHz)	< 1.5 dB	< 1.5
SCXI-1190, PXI-2590 (@ 2 GHz)	< 3 dB	< 2.5
SCXI-1191, PXI-2591 (@ 4 GHz)	< 0.9 dB	< 1.5

Table 1. Parameters of High-Frequency Switching Modules

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Switch Specifications

Specifications (continued)

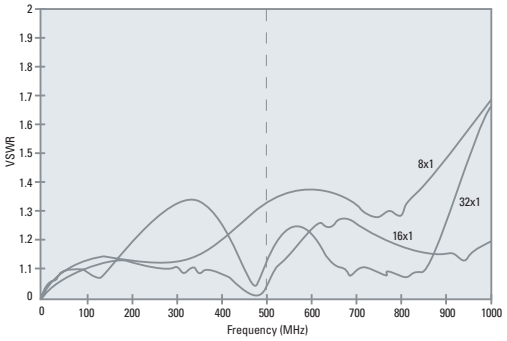

Input Characteristics

Maximum switching voltage	150 V, CAT I
Maximum switching current	0.5 A (per channel)
Maximum carry current	1 A (per channel)
Simultaneous channels at maximum current	
PXI-2593	2, maximum
SCXI-1193	4, maximum
DC path resistance	
Initial	<1.0 Ω
End of life	≥2.0 Ω

Dynamic Characteristics

Maximum scan rate	100 operations/s
Expected relay life:	
Mechanical	$5x10^7$ operations
Electrical	$3x10^5$ operations (30 V, 0.3 ADC resistive)

Physical Characteristics

Relay type	Electromechanical, latching
Relay contact material	Silver palladium and gold
Dimensions	
PXI-2593	10 by 16 by 4 cm (3.9 by 6.3 by 1.6 in.)
SCXI-1193	3.0 by 17.3 by 19.6 cm (1.2 by 6.7 by 7.6 in.)
I/O connectors	
PXI-2593	18 MCX jacks
SCXI-1193	36 MCX jacks
Trigger connectors	2 SMB jacks

Environment

Operating temperature	0 to 50 °C
Storage temperature	- 20 to 70 °C
Relative humidity	5 to 85% noncondensing
Pollution degree	2
Approved altitudes	Up to 2,000 m

Safety

This product is designed to meet the requirements of the following standards of safety for electrical equipment for measurement, control and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 3111-1, UL 61010B-1
- CAN/CSA C22.2 No. 1010.1

CE Compliance

This product meets the essential requirements of applicable European Directives, as amended for CE Marking, as follows:

Low-voltage Directive (safety)	73/23/EEC
Electromagnetic Compatibility Directive (EMC)	89/336/EEC

SCXI-1190, PXI-2590

Input Characteristics

Number of channels per bank	4
Number of banks	
SCXI-1190	4
PXI-2590	1
Input voltage	
Channel-to-earth	24 VDC
Maximum switching voltage	
AC	24 V_{rms}
DC	24 VDC
Maximum switching capacity per channel	
AC	1 A_{rms} at 24 V_{rms}
DC	1 A at 24 VDC
Maximum switching power per channel	24 W
Contact resistance (initial)	100 mΩ maximum
Contact material	Gold-clad silver

RF Performance Characteristics

Characteristic impedance (Z_0)	50 Ω
Insertion loss	
100 MHz	<0.4 dB
500 MHz	<0.9 dB
1.3 GHz	<1.5 dB
2 GHz	<3 dB
VSWR	
100 MHz	<1.15
500 MHz	<1.35
1.3 GHz	<1.5
2 GHz	<2.5
Isolation	
500 MHz	>60 dB
1.3 GHz	>50 dB
2 GHz	>30 dB
Rise time	<300 ps
Signal delay	<3 ns
Maximum RF carry power at 900 MHz	10 W

Dynamic Characteristics

Relay operate time (at 20 °C)	
Typical	15 ms
Relay release time (at 20 °C)	
Typical	15 ms
Expected life	
Mechanical (no load)	$5x10^6$ operations
Electrical at maximum switching capacity	10^5 operations

Caution: Exceeding the maximum switching capability decreases expected life.

Power Requirement

+5 VDC	600 mA maximum (all relays closed)

Physical

Dimensions	
SCXI-1190	17.3 by 19.6 by 3.0 cm (6.81 by 7.70 by 1.19 in.)
PXI-2590	10 by 16 by 4 cm (3.9 by 6.3 by 1.6 in.)
I/O connectors	5 SMB female per bank

Environment

Operating temperature	0 to 50 °C
Storage temperature	- 20 to 70 °C
Relative humidity	5 to 85% noncondensing
Pollution degree	2
Approved altitudes	Up to 2,000 m

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications (continued)

SCXI-1191, PXI-2591

Input Characteristics

Number of channels per bank 4
Number of banks 4
  SCXI-1191 4
  PXI-2591 1
Input voltage
  Channel-to-ground ..... 30 V_{rms}/VDC
Maximum switching voltage
  AC ..... 30 V_{rms}
  DC ..... 30 VDC
Maximum switching capacity per channel
  AC. ..... 0.33 A at 30 V_{rms}
  DC ..... 0.33 A at 30 VDC
Maximum switching power per channel ..... 10 W
Contact on resistance (initial) ..... 200 mΩ maximum
Contact material ..... Gold

RF Performance Characteristics

Characteristic impedance (Z0) ..... 50 Ω
Insertion loss
  2.5 GHz ..... <0.6 dB
  4 GHz ..... <0.9 dB
VSWR
  2.5 GHz ..... <1.3
  4 GHz ..... <1.5
Isolation
  2.5 GHz ..... >60 dB
  4 GHz ..... >55 dB
Maximum RF carry power at 900 MHz ..... 10 W

Dynamic Characteristics

Relay operate time (at 20 °C)
  Typical ..... 15 ms
Relay release time (at 20 °C)
  Typical ..... 15 ms
Expected life
  Mechanical (no load) ..... $5x10^6$ operations
  Electrical (maximum switching capacity).. 10^5 operations
Caution: Exceeding the maximum switching capability decreases expected life.

Power Requirement

+5 VDC ..... 950 mW maximum (all relays closed)

Physical

Dimensions
  SCXI-1191 ..... 17.3 by 19.6 by 3.0 cm (6.81 by 7.70 by 1.19 in.)
  PXI-2591 ..... 10 by 16 by 4 cm (3.9 by 6.3 by 1.6 in.)
I/O connector ..... 5 SMA female per bank

Environment

Operating temperature ..... 0 to 50 °C
Storage temperature ..... -20 to 70 °C
Relative humidity ..... 5 to 85% noncondensing

SCXI-1192

Input Characteristics

Number of relays ..... 8 SPDT (latching)
Input voltage
  Channel-to-ground ..... 30 V_{rms}/VDC
Maximum switching voltage ..... 30 VDC
Maximum carry current per channel ..... 2 ADC
Maximum continuous carry power per channel
  1 to 3 GHz ..... 120 W
  3 to 8 GHz ..... 80 W
  8 to 12.4 GHz ..... 60 W
  12.4 to 18 GHz ..... 50 W

The total input power for all relays combined should not exceed the preceding specifications. When using multiple relays, refer to table below for adjusted maximum input power

Active Relays	1 to 3 GHz	3 to 8 GHz	8 to 12.4 GHz	12.4 to 18 GHz
1	120 W	80 W	60 W	50 W
2	60 W	40 W	30 W	25 W
4	30 W	20 W	15 W	12.5 W
8	15 W	10 W	7.5 W	6.25 W

Contact resistance (initial) ..... 100 mΩ maximum
Contact material ..... Gold plate

RF Performance Characteristics

Characteristic impedance (Z0) ..... 50 Ω
Insertion loss at:
  ≤4 GHz ..... ≤0.2 dB
  4 to 8 GHz ..... ≤0.3 dB
  8 to 12.4 GHz ..... ≤0.4 dB
  12.4 GHz to 18 GHz ..... ≤0.5 dB
VSWR at:
  ≤1 GHz ..... ≤1.1
  1 to 4 GHz ..... ≤1.15
  4 to 8 GHz ..... ≤1.25
  8 to 12.4 GHz ..... ≤1.35
  12.4 to 18 GHz ..... ≤1.5
Isolation:
  ≤1 GHz ..... ≥85 dB
  1 to 4 GHz ..... ≥80 dB
  4 to 8 GHz ..... ≥70 dB
  8 to 12.4 GHz ..... ≥65 dB
  12.4 to 18 GHz ..... ≥60 dB

Dynamic Characteristics

Relay operate time (at 20 °C)
  Typical ..... 15 ms
Relay release time (at 20 °C)
  Typical ..... 15 ms
Expected life
  Mechanical (no load) ..... $5x10^6$ operations
  Electrical at 5 W ..... $5x10^6$ operations (to 3 GHz, 50 Ω, VSWR maximum 1.2)
Caution: Exceeding these electrical parameters decreases expected life.

Power Requirement

+5 VDC ..... 800 mA, maximum

Physical

Dimensions ..... 17.3 by 19.6 by 3.0 cm (6.81 by 7.70 by 1.19 in.)
I/O connector ..... 24 SMA female

Environment

Operating temperature ..... 0 to 50 °C
Storage temperature ..... -20 to 70 °C
Relative humidity ..... 5 to 85% noncondensing

SCXI-1163R

Input Characteristics

Number of relays ..... 32 organized as 8 optically isolated banks of 4 relays each
Relay type ..... Normally open (Form A). solid-state relays
Maximum switching voltage
  AC ..... 240 VAC
  DC ..... 240 VDC
Maximum switching capacity ..... 200 mA
Commonmode isolation ..... 250 V_{rms} between banks, and bank to ground
On-resistance ..... 8 Ω
Output capacitance ..... 110 pF at 50 V, 1 MHz
Leakage current ..... 1 µA maximum
Transfer rate in serial mode[1]
  (1 word = 32 bits) ..... 750 words/s
Relay set time ..... 0.6 ms
Relay reset time ..... 0.1 ms
Power-on state ..... Relays open

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP