

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments PXI-5621* at our website: *Click HERE*

NI PXI-5621 Specifications

High-Speed Digitizer

The NI PXI-5621 is a DC-coupled 64 MS/s 14-bit high-speed digitizer. Except for its DC coupling, the PXI-5621 is functionally identical to the PXI-5620. Refer to the *NI PXI-562x User Manual* for instructions on installing and using your NI PXI-5621.

The NI PXI-5621 specifications are warranted at 0–50 °C ambient unless otherwise specified, and include a 10 minute warm-up time from ambient conditions.

General Specifications

Number of channels 1

Resolution ..... 14 bits

Sample rate range ..... 1 kS/s to 64 MS/s

Onboard memory

- Not using DDC ..... 32 MS
- Using DDC (complex data) ..... 16 MS

Input

Signal level

- Nominal ..... 0 dBm (±0.316 Vp)
- Full-scale ..... +10 dBm (±1.000 Vp)
- Max with dither enabled ..... +8 dBm (±0.794 Vp)
- Non-operating
  - Max input level ..... +20 dBm (±3.16 Vp)
  - Max DC input voltage ..... ±3.0 V

Input impedance ..... 50 Ω nominal

Coupling ..... DC

National Instruments™, NI™, and ni.com™ are trademarks of National Instruments Corporation. Product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your CD, or `ni.com/patents`.

August 2002
323398B-01

© 2002 National Instruments Corp. All rights reserved.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DC offset.....±1 mV

Analog bandwidth (–3 dB range) .....0 Hz to 36 MHz

Amplitude accuracy.....±0.5 dB

VSWR

0–25 MHz.....< 1.5:1

25–32 MHz.....< 3:1

Dither (can be disabled)

Frequency range .....150 Hz to 4 MHz

Frequency

Internal sample clock

Frequency .....64 MHz/n, where $1 < n < 2^{16}$

Accuracy.....< ±25 ppm

Phase noise

Offset	Density
100 Hz	< –100 dBc/Hz
1 kHz	< –120 dBc/Hz
10 kHz	< –130 dBc/Hz
100 kHz	< –130 dBc/Hz

Residual FM .....< 2 $Hz_{pk–pk}$ in 10 ms

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Amplitude

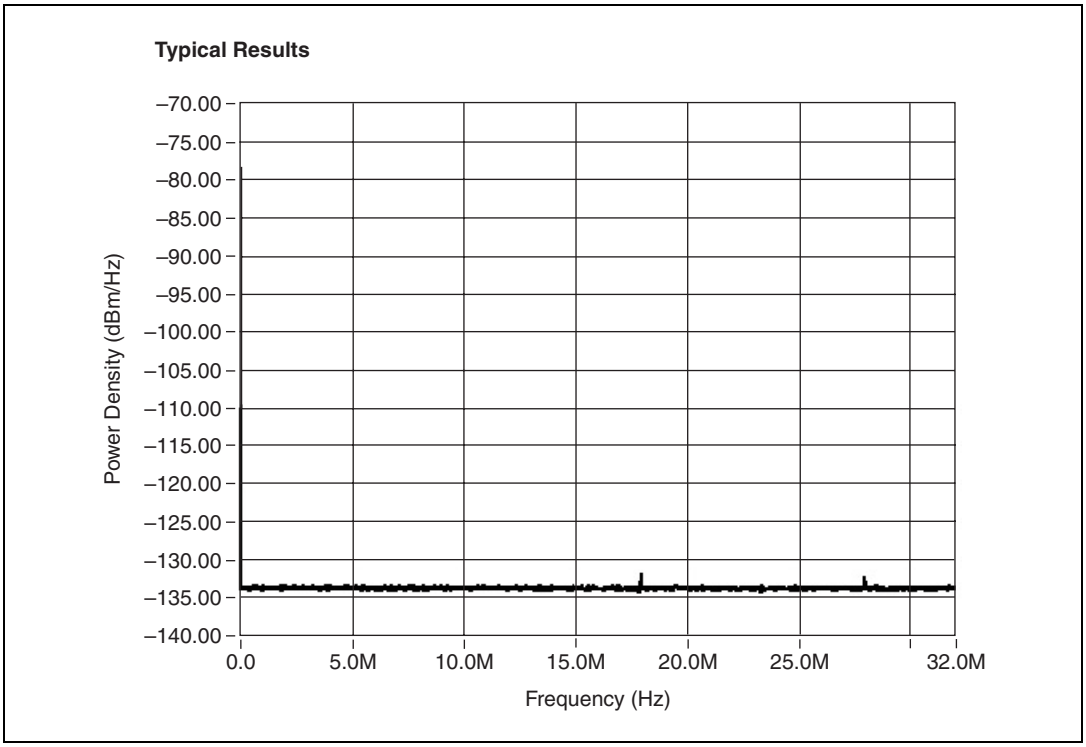


Figure 1. Noise Density (Dither Disabled, Input Terminated)

Average noise density
(dither off) ..... < –129 dBm/Hz

Signal-to-noise ratio

9 dBm signal, full bandwidth..... > 62 dB

Harmonic distortion (single tone, 0 dBm signal;
dither disabled, includes aliased harmonic distortion)

4–15 MHz, dither enabled ..... < –77 dBm

0–32 MHz, dither disabled..... < –71 dBm

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

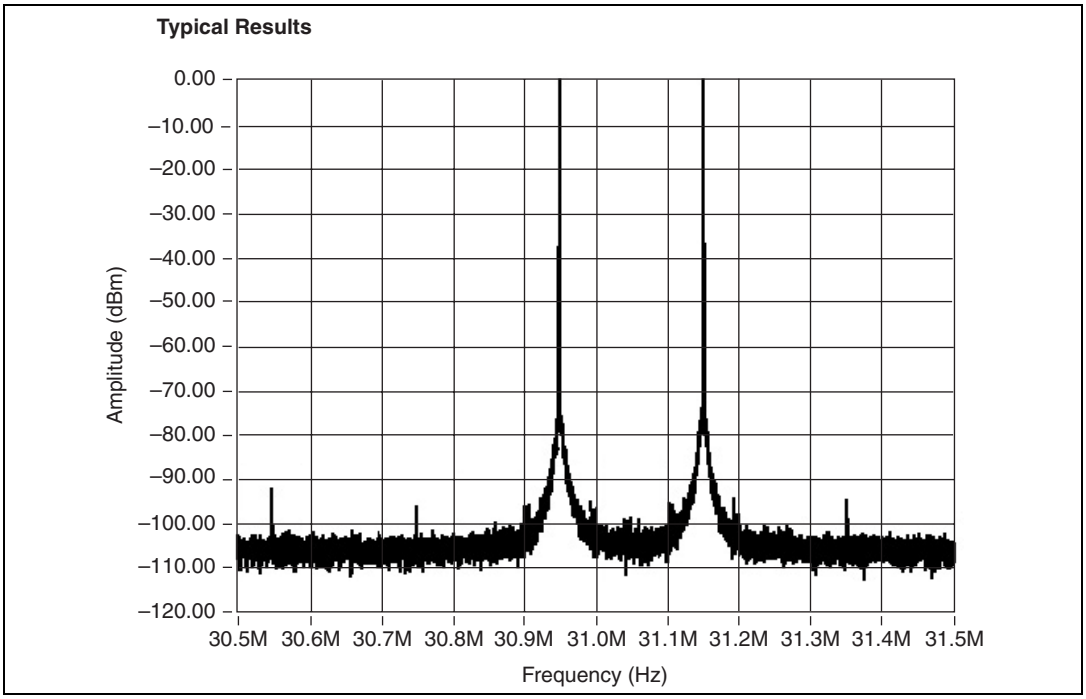


Figure 2. Intermodulation Distortion

Intermodulation distortion
(2-tone, 0 dBm signals, 200 kHz separation)

4–15 MHz, dither enabled .....< –86 dBm

0–32 MHz, dither disabled .....< –78 dBm

Residual responses (input terminated)....< –75 dBm

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

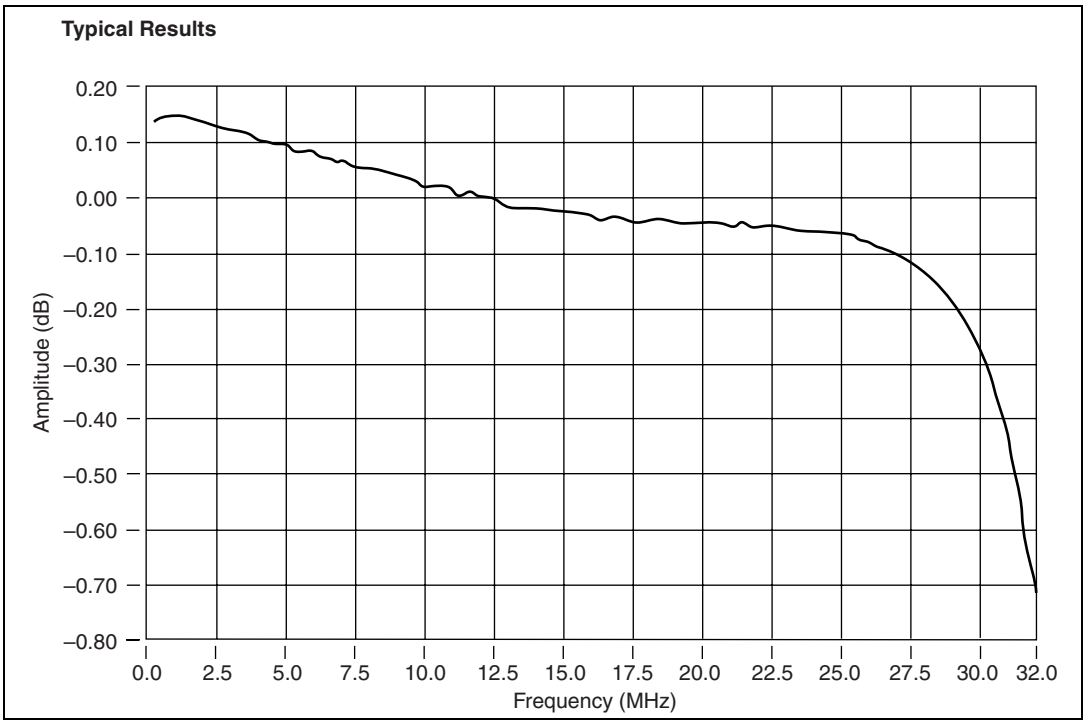


Figure 3. Frequency Response (0.1–32 MHz)

Frequency response (4–25 MHz)

Relative (to response at 15 MHz) ... < ±0.25 dB

Absolute ..... < ±0.6 dB

Absolute (using calibration table) ... < ±0.5 dB

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Phase

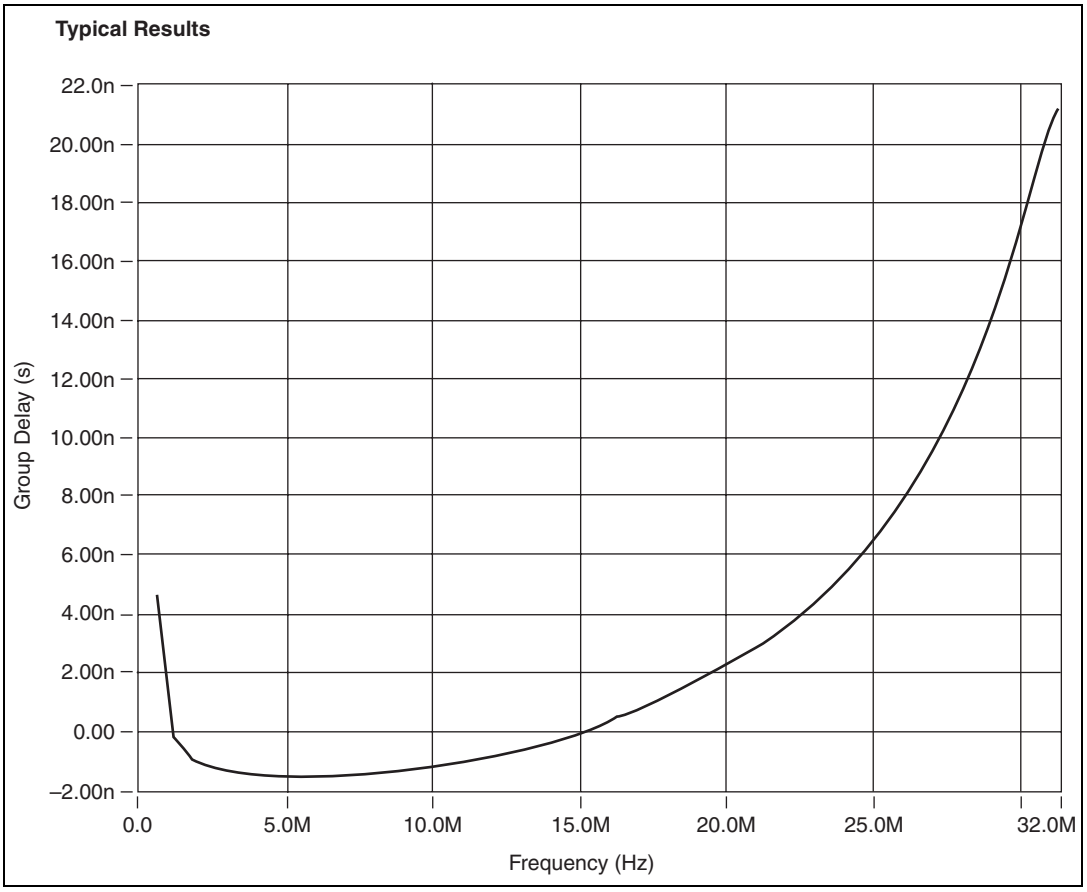


Figure 4. Group Delay versus Frequency

Group delay variation
(5–25 MHz) .....9 ns_{pk-pk}

Group delay variation
(0.5–30 MHz) .....26 ns_{pk-pk}

DDC

Decimation rate.....32–4,096

DDC tuning resolution.....0.014901 Hz

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Triggering

Modes ..... Immediate, software, digital

Sources ..... PFI 1, PXI<0..7>, PXI STAR

Export ..... PFI 1, PXI<0..7>

Slope ..... Rising, falling

Pretrigger depth ..... Up to 32 MS

Posttrigger depth ..... Up to 32 MS

Minimum pulse width ..... 100 ns

External Trigger (PFI 1)

PFI 1 connector ..... SMB male

Trigger level ..... TTL

Max input voltage ..... 5.5 V

External Frequency Reference Input

Connector (REF CLK IN) ..... SMA female

Impedance ..... 50 Ω nominal

Input amplitude ..... –5 to +15 dBm

Max non-operating input level ..... +20 dBm

Max DC input voltage ..... ±3.5 VDC

Frequency range ..... 10 MHz ±40 ppm

Crosstalk from reference input ..... < –85 dB

Calibration

Calibration interval ..... 1 year

Environmental Specifications

Warm-up time ..... 10 minutes

Operating environment

Ambient temperature ..... 0–50 °C

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Humidity.....10–90%, noncondensing

Storage environment

Storage temperature.....–20 to 70 °C

Humidity.....5–95%, noncondensing

Maximum altitude.....2,000 meters

Pollution degree 2

Indoor use only

Power Requirements

+3.3 VDC (±5%) .....< 650 mA

+5 VDC (±5%) .....< 1.5 A

+12 VDC (±5%) .....< 650 mA

–12 VDC (±5%).....< 75 mA

Maximum Working Voltage

Channel-to-earth .....2 V, Installation Category I

Safety

Meets the requirements of the following standards for safety for electrical equipment for measurement, control, and laboratory use:

EN 61010-1:1993/A2:1995, IEC 61010-1:1990/A2:1995,
UL 3101-1:1993, UL 3111-1:1994, UL 3121:1998,
CAN/CSA C22.2 no. 1010.1:1992/A2:1997 d.

Electromagnetic Compatibility

CE, C-Tick, and FCC Part 15 (Class A) compliant

Electrical emissions .....EN 55011 Class A at 10 m FCC Part 15A above 1 GHz

Electrical immunity .....Evaluated to EN 61326:1997/A1:1998, Table 1

Note For full EMC compliance, you must operate this device with shielded cabling. In addition, all covers and filler panels must be installed. See the Declaration of Conformity (DoC) for this product for any additional regulatory compliance information. To obtain the

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DoC for this product, click **Declaration of Conformity** at `ni.com/hardref.nsf`. This Web site lists the DoCs by product family. Select the appropriate product family, followed by your product, and a link to the DoC (in Adobe Acrobat format) appears. Click the Acrobat icon to download or read the DoC.

Dimensions

PXI-5621 (1 PXI slot) ..... 10 by 16 by 2.0 cm
(3.9 by 6.3 by 0.8 in.)

Certifications and Compliances

CE Mark Compliance

Conductive Immunity

When tested as specified in EN 61000-4-6 at 3 V_{rms}, the spurious response is within specifications except at the test frequency. A spurious signal of up to –45 dBm may appear at the test frequency.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

323398A-01
323398A-01 Jul02

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP