

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

SPECIFICATIONS

PXI-5695

RF Attenuator

Contents

Definitions....1
Conditions....2
Frequency Range....2
Channels....2
Channel 0 (CH 0) Performance, Main Path....2
Channel 0 (CH 0) Performance, Direct Path....4
Channel 1 (CH 1) Performance....5
Channel 0/Channel 1 Cascaded Path Performance....10
Power Requirements....10
Calibration....11
Physical Characteristics....11
- Front Panel Connectors....11
- Physical Dimensions....11

Environment....12
- Storage Environment....12
- Operating Environment....12
- Shock and Vibration....12

Compliance and Certifications....13
- Safety....13
- Electromagnetic Compatibility....13
- CE Compliance....13
- Online Product Certification....13
- Environmental Management....14

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

The following characteristic specifications describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the performance met by a majority of models.
- *Nominal* specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

NATIONAL INSTRUMENTS

Specifications are *Typical* unless otherwise noted.

Conditions

Specifications are valid under the following conditions unless otherwise noted.

- Over ambient temperature ranges of 0 °C to 55 °C
- 10 minutes warm-up time
- Calibration cycle maintained
- Chassis fan speed set to High

Frequency Range

Frequency range	50 MHz to 8.0 GHz

Channels

Number of channels	2
Gain	
Channel 0	Fixed
Channel 1	Programmable

Channel 0 (CH 0) Performance, Main Path

Table 1. Channel 0 (CH 0) Performance, Main Path

Main Path Specifications	Value
Level calibration accuracy[1]	±0.7 dB
Maximum input power (operation)	+33 dBm, maximum (10 Vrms, 14 Vpk)
Absolute maximum input power (no damage)	+33 dBm, maximum
Maximum reverse power (no damage)	+33 dBm, maximum
DC voltage at input[2]	±10 V, maximum
Gain variation by temperature[3]	$-(4.66 * 10^{-13}) * (\textit{Frequency in Hz})$ in dB/°C

[1] Valid for T_{ref} ±5 °C. For temperatures other than T_{ref}, the level calibration accuracy is valid after applying the gain correction factor for ΔT.

[2] DC-coupled from input to output, but calibrated only from 50 MHz to 8 GHz.

[3] Calculate the correction factor using the following equation:
ΔGain = (*Gain variation by temperature*) * ΔT

Figure 1. Average Measured Attenuation (Fixed Attenuator)


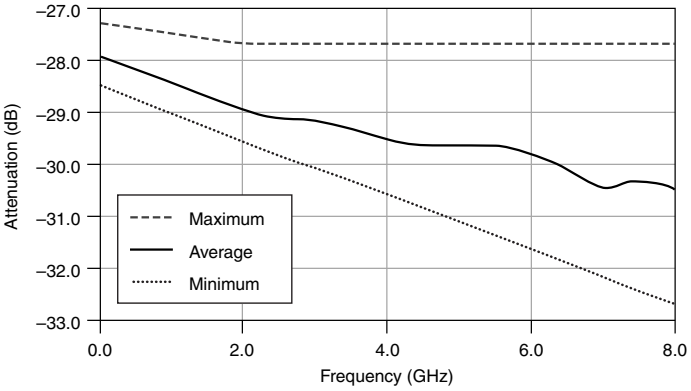


Figure 2. Average Measured Input and Output Voltage Standing Wave Ratio (VSWR)

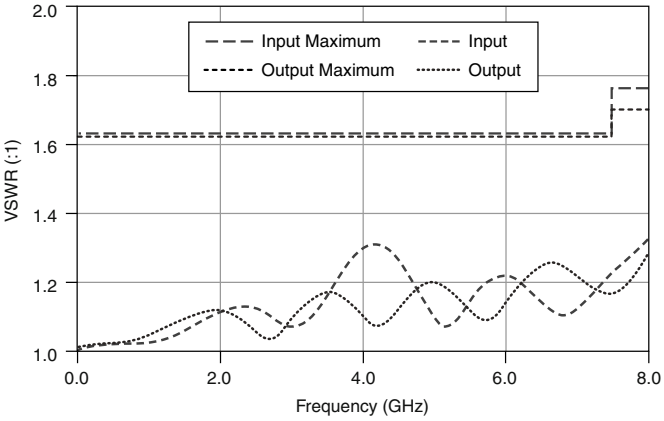


where

$\Delta T = T_{sensor} - T_{ref}$

T_{sensor} = the temperature reading of the onboard temperature sensor in °C, as reported by the ni5690 Get Temperature VI

T_{ref} = 26 °C

Figure 3. Measured Input to Output Leakage

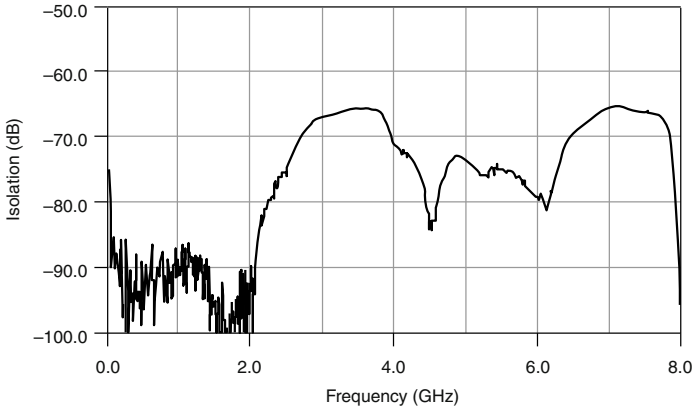

Channel 0 (CH 0) Performance, Direct Path

Table 2. Channel 0 (CH 0) Performance, Direct Path

Direct Path Specifications	Value
Level calibration accuracy[4]	±0.7 dB
Maximum input power (operation)	+33 dBm, maximum (10 Vrms, 14 Vpk)
Absolute maximum input power (no damage)	+33 dBm, maximum
DC voltage at input[5]	±10 V, maximum
Relay switch time	5 ms, maximum
Gain variation by temperature[6]	$-(3.09 * 10^{-13}) *$ (*Frequency in Hz*) in dB/°C

[4] Valid for T_{ref} ± 5 °C. For temperatures other than T_{ref}, the level calibration accuracy is valid after applying the gain correction factor for ΔT.

[5] DC-coupled from input to output, but only calibrated from 50 MHz to 8 GHz.

[6] Calculate the correction factor using the following equation:
ΔGain = (Gain variation by temperature) *ΔT
where

$\Delta T = T_{sensor} - T_{ref}$

T_{sensor} = the temperature reading of the onboard temperature sensor in °C, as reported by the ni5690 Get Temperature VI

T_{ref} = 26 °C

Figure 4. Average Measured Attenuation


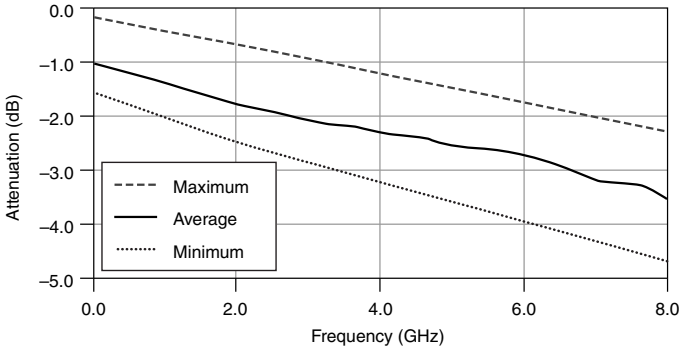


Figure 5. Average Measured Input and Output VSWR

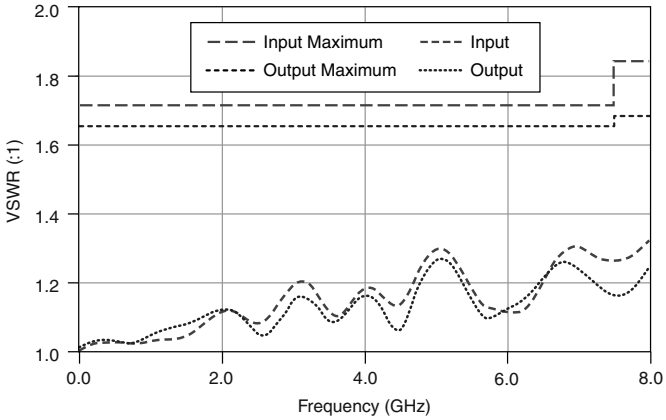

Channel 1 (CH 1) Performance

Table 3. Channel 1 (CH 1) Performance

Programmable Path Specifications	Value
Attenuation resolution	+0.5 dB, typical
Level calibration accuracy[7]	±0.7 dB

[7] Valid for T_{ref} ±5 °C. For temperatures other than T_{ref}, the level calibration accuracy is valid after applying the gain correction factor for ΔT.

Table 3. Channel 1 (CH 1) Performance (Continued)

Programmable Path Specifications	Value
Attenuation settling time[8]	+4 µs, maximum
Maximum input power (operation)	+27 dBm, maximum (5 Vrms, 7 Vpk)
Absolute maximum input power (no damage)	+27 dBm, maximum
Maximum reverse power (no damage)	+26 dBm, maximum
Gain variation by temperature[9]	$-(2.69 * 10^{-13}) *$ (*Frequency in Hz*) in dB/°C

Table 4. PXI-5695 Channel 1 Variable Attenuation Warranted Specification (dB)

	10 MHz[10]	8 GHz
Minimum Attenuation (Upper Bound)	10.7	13.6
Minimum Attenuation (Lower Bound)	12.3	16.5
Maximum Attenuation (Upper Bound)	41.6	44.3
Maximum Attenuation (Lower Bound)	44.0	47.4

[8] The attenuator settling time is measured to 0.5 dB of the final value when switching from minimum to maximum attenuation. Achieving settling times closer to the final attenuation value may take substantially longer.

[9] Calculate the correction factor using the following equation:
ΔGain = (Gain variation by temperature) * ΔT
where

$\Delta T = T_{sensor} - T_{ref}$

T_{sensor} = the temperature reading of the onboard temperature sensor in °C, as reported by the ni5690 Get Temperature VI

T_{ref} = 26 °C

[10] The warranted specification is valid only between 10 MHz and 8 GHz. Determine intermediate bounds by linearly interpolating the provided data.

Figure 6. Average Measured Programmable Attenuation Range

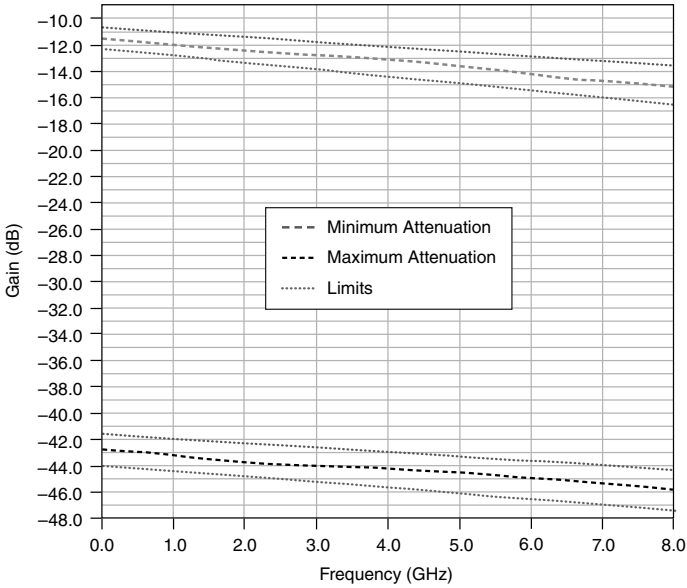


Figure 7. Average Measured Input and Output VSWR at 0 dB Attenuation Setting

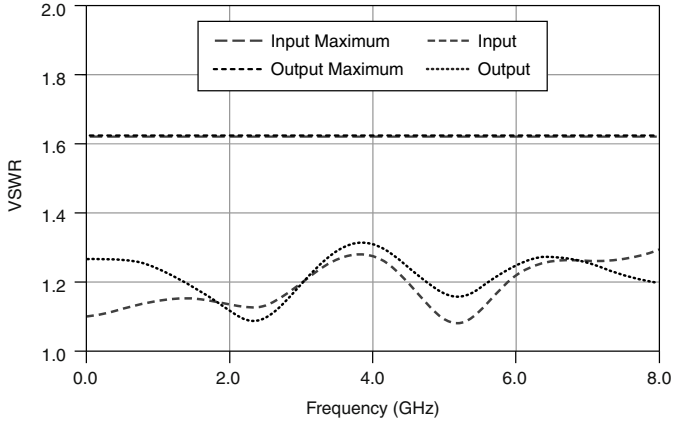


Figure 8. Measured Input and Output VSWR at 31.5 dB Attenuation Setting

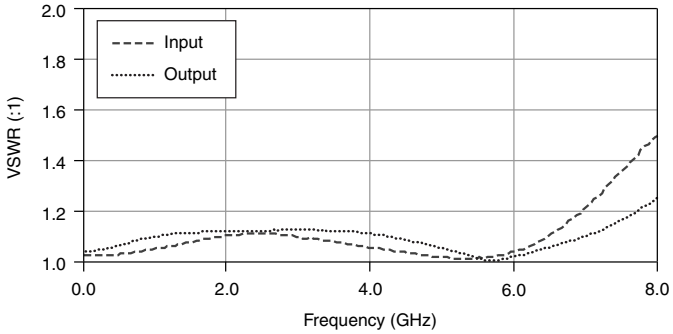


Figure 9. Measured Input Intercept Point (IIP3)

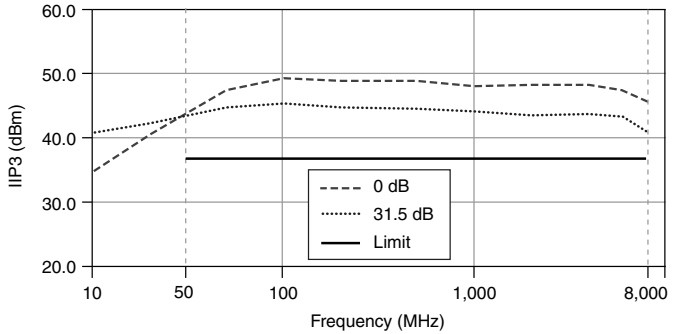


Figure 10. Measured Input/Output Leakage



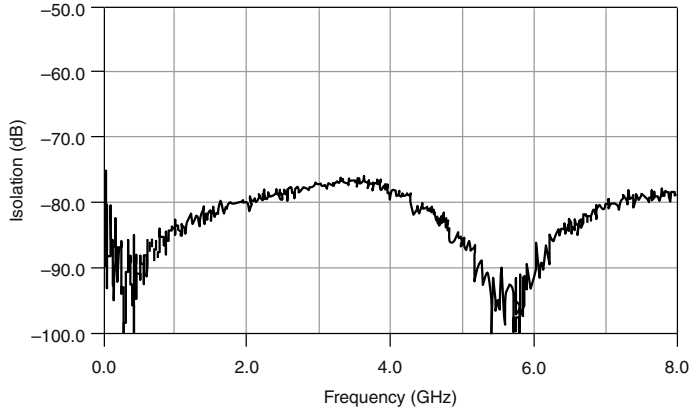


Figure 11. Measured Power (0.1 dB)

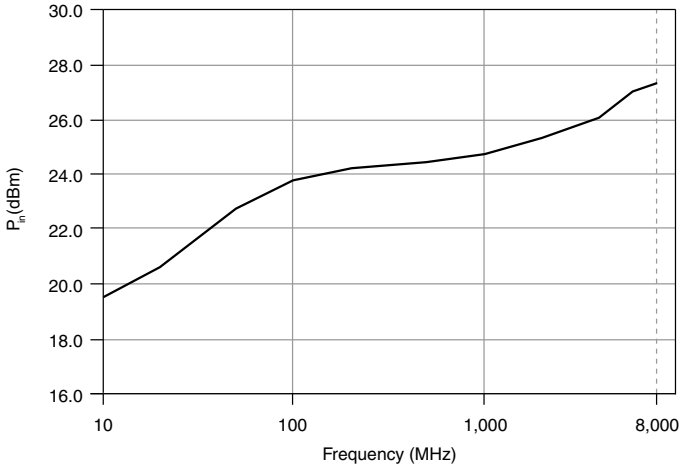

Channel 0/Channel 1 Cascaded Path Performance

Figure 12. Cascaded Response

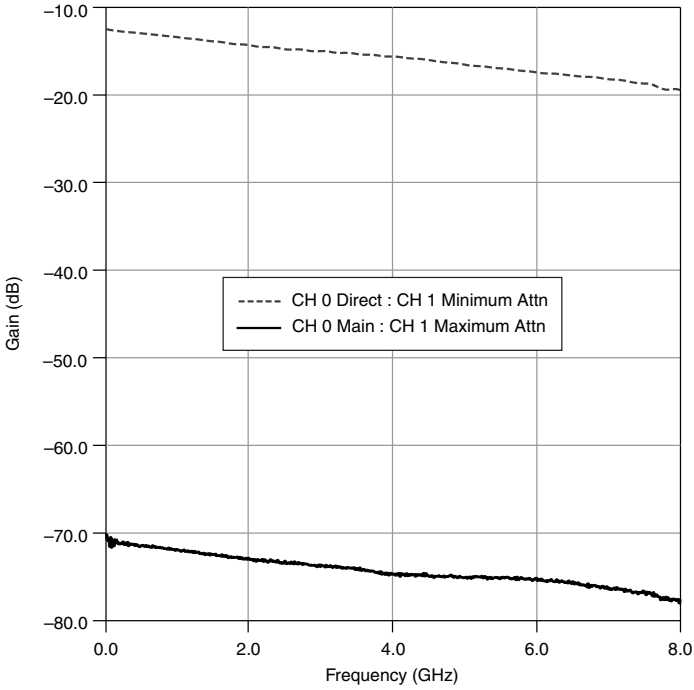

Note When cascading Channel 0 and Channel 1, each channel is calibrated individually.

Power Requirements

Table 5. Power Requirements

Power Rail (V_{DC})	Maximum Current (mA)	Typical Current (mA)	Maximum Power (W)
+3.3	660	250	2.2
+5	—	—	—

Table 5. Power Requirements (Continued)

Power Rail (V_{DC})	Maximum Current (mA)	Typical Current (mA)	Maximum Power (W)
+12	528	0	7.0
-12	508	12	6.1

Calibration

Interval	1 year

Physical Characteristics

Front Panel Connectors

CH 0 IN	
Connector	SMA female
Impedance	50 Ω
Coupling	DC[11]
CH 0 OUT	
Connector	SMA female
Impedance	50 Ω
CH 1 IN	
Connector	SMA female
Impedance	50 Ω
Main path coupling	AC
CH 1 OUT	
Connector	SMA female
Impedance	50 Ω

Physical Dimensions

Dimensions	3U, One Slot, PXI/cPCI Module 21.6 cm × 2.0 cm × 13.0 cm (8.5 in. × 0.8 in. × 5.1 in.)
Weight	263 g (9.2 oz)

[11] Direct path passes input DC level to output.

Environment

Maximum altitude	2,000 m (at 25 °C ambient temperature)
Pollution Degree	2

Indoor use only.

Storage Environment

Ambient temperature range	-40 to 71 °C (Tested in accordance with IEC-60068-2-1 and IEC-60068-2-2. Meets MIL-PRF-28800F Class 3 limits.)
Relative humidity range	5% to 95%, noncondensing (Tested in accordance with IEC-60068-2-56.)

Operating Environment

Ambient temperature range	0 to 55 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2.)
Relative humidity range	10% to 90%, noncondensing (Tested in accordance with IEC 60068-2-56.)

Shock and Vibration

Operating shock	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Meets MIL-PRF-28800F Class 2 limits.)
Random vibration	
Operating	5 Hz to 500 Hz, 0.3 g_{rms}
Nonoperating	5 Hz to 500 Hz, 2.4 g_{rms} (Tested in accordance with IEC 60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

Compliance and Certifications

Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1

Note For UL and other safety certifications, refer to the product label or the *Online Product Certification* section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions

Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.

Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treament of material or inspection/analysis purposes.

Note For EMC declarations and certifications, refer to the *Online Product Certification* section.

CE Compliance CE

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit *ni.com/*

certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at *ni.com/environment*. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit *ni.com/environment/weee*.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令(RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 `ni.com/environment/rohs_china`。(For information about China RoHS compliance, go to `ni.com/environment/rohs_china`.)

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at `ni.com/trademarks` for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help**»**Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at `ni.com/patents`. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at `ni.com/legal/export-compliance` for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2009—2018 National Instruments. All rights reserved.

375125E-01 February 27, 2018

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP