

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments PXIe-4138* at our website: ***Click HERE***

SPECIFICATIONS

PXIe-4145

4-Channel, ±6 V, 500 mA Precision PXI Source Measure Unit

These specifications apply to the PXIe-4145.

Contents

Definitions....1
Conditions....2
Device Capabilities....2
SMU Specifications....4
- Voltage Programming and Measurement Accuracy/Resolution....4
- Current Programming and Measurement Accuracy/Resolution....4
- Output Resistance Programming Accuracy/Resolution, Typical....5
- Calculating SMU Resolution....5
- Example of Calculating SMU Resolution....6

Sinking Power vs. Ambient Temperature Derating....6
Additional Specifications....7
Supplemental Specifications....9
- Measurement and Update Timing....9
- Triggers....10

Calibration Interval....10
Physical Characteristics....11
Power Requirement....11
Environment....11
- Operating Environment....11
- Storage Environment....11

Shock and Vibration....12
Compliance and Certifications....12
- Safety....12
- Electromagnetic Compatibility....12
- CE Compliance....13
- Online Product Certification....13
- Environmental Management....13

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the expected performance met by a majority of the models.
- *Nominal* specifications describe parameters and attributes that may be useful in operation.

Specifications are *Warranted* unless otherwise noted.

Conditions

Specifications are valid under the following conditions unless otherwise noted.

- Ambient temperature[1] of 23 °C ± 5 ºC
- Calibration interval of 1 year
- 30 minutes warm-up time
- Self-calibration performed within the last 24 hours
- **niDCPower Aperture Time** property or `NIDCPOWER_ATTR_APERTURE_TIME` attribute set to 2 power-line cycles (PLC)

Device Capabilities

The following table and figure illustrate the voltage and the current source and sink ranges of the PXIe-4145.

Table 1. PXIe-4145 Current Source and Sink Ranges


Channels	DC Voltage Ranges	DC Current Source and Sink Ranges
0 through 3[2]	±6 V	10 µA 100 µA 1 mA 10 mA 100 mA 500 mA

[1] The ambient temperature of a PXI system is defined as the temperature at the chassis fan inlet (air intake).

[2] Channels are isolated from earth ground but share a common LO.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 1. PXIe-4145 Quadrant Diagram, All Channels

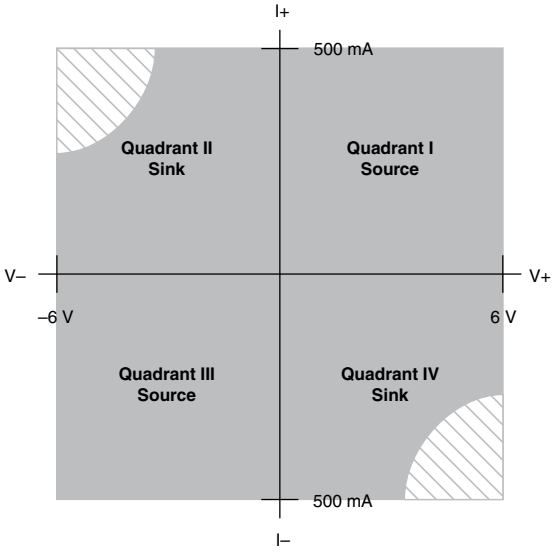

Limit power sinking to 7 W per module. Additional derating applies to module sinking power when operating at an ambient temperature of >45 °C.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

SMU Specifications

Voltage Programming and Measurement Accuracy/ Resolution

Table 2. Voltage Programming and Measurement Accuracy/Resolution

Range	Resolution and noise (0.1 Hz to 10 Hz)	1 Year Accuracy (23 °C ± 5 °C) ± (% of voltage + offset)[3]		Tempco ± (% of voltage + offset)/°C, 0 °C to 55 °C
		T_{cal} ± 5 °C	T_{cal} ± 1 °C	
6 V	6 µV	0.015% + 600 µV	0.013% + 200 µV	0.0005% + 1 µV

Related Information

Additional Specifications on page 7
Calculating SMU Resolution on page 5

Current Programming and Measurement Accuracy/ Resolution

Table 3. Current Programming and Measurement Accuracy/Resolution

Range	Resolution and noise (0.1 Hz to 10 Hz)	1 Year Accuracy (23 °C ± 5 °C) ± (% of current + offset)		Tempco ± (% of current + offset)/°C, 0 °C to 55 °C
		T_{cal} ± 5 °C	T_{cal} ± 1 °C	
10 µA	15 pA	0.03% + 3 nA	0.03% + 1.2 nA	0.002% + 20 pA
100 µA	100 pA	0.03% + 25 nA	0.03% + 6.0 nA	0.002% + 200 pA
1 mA	1 nA	0.03% + 250 nA	0.03% + 60 nA	0.002% + 2.0 nA
10 mA	10 nA	0.03% + 2.5 µA	0.03% + 600 nA	0.002% + 20 nA

[3] Accuracy is specified for no load output configurations. Refer to Load Regulation and Remote Sense in the *Additional Specifications* section for additional accuracy derating and conditions.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 3. Current Programming and Measurement Accuracy/Resolution (Continued)

Range	Resolution and noise (0.1 Hz to 10 Hz)	1 Year Accuracy (23 °C ± 5 °C) ± (% of current + offset)		Tempco ± (% of current + offset)/°C, 0 °C to 55 °C
		T_{cal} ± 5 °C	T_{cal} ± 1 °C	
100 mA	100 nA	0.03% + 25 µA	0.03% + 6.0 µA	0.002% + 200 nA
500 mA	500 nA	0.1% + 125 µA	0.1% + 30 µA	0.008% + 1 µA

Related Information

Additional Specifications on page 7
Calculating SMU Resolution on page 5

Output Resistance Programming Accuracy/Resolution, Typical

Table 4. Output Resistance Programming Accuracy/Resolution, Typical


Current limit range	Programmable resistance range	Resolution	Accuracy ± (% of resistance setting), T_{cal} ± 5 °C
10 µA	± 50 kΩ	1.0 Ω	0.04% + 260 mΩ
100 µA	± 5 kΩ	100 mΩ	0.04% + 35 mΩ
1 mA	± 500 Ω	10 mΩ	0.04% + 13 mΩ
10 mA	± 50 Ω	1.0 mΩ	0.04% + 10 mΩ
100 mA	± 5 Ω	100 µΩ	0.04% + 10 mΩ
500 mA	± 1 Ω	20 µΩ	0.12% + 10 mΩ

Calculating SMU Resolution

Refer to the following figure as you complete the following steps to derive a resolution in absolute units:

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 2. Noise and Resolution versus Measurement Aperture, Typical

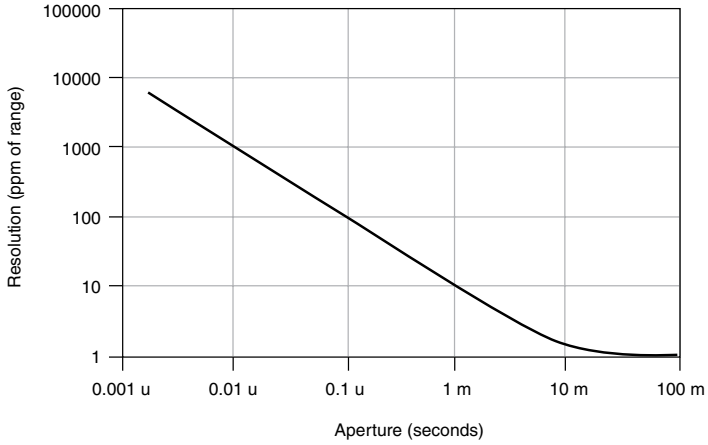

1. Select a voltage or current range.
2. For a given aperture time, find the corresponding resolution.
3. To convert resolution from ppm of range to absolute units, multiply resolution in ppm of range by the selected range.

Example of Calculating SMU Resolution

The PXIe-4145 has a resolution of 100 ppm when set to a 100 µs aperture time. In the 6 V range, resolution can be calculated by multiplying 6 V by 100 ppm, as shown in the following equation:

$6\ V * 100\ ppm = 6\ V * 100 * 1 \times 10^{-6} = 600\ \mu V$

Likewise, in the 10 mA range, resolution can be calculated by multiplying 10 mA by 100 ppm, as shown in the following equation:


$10\ mA * 100\ ppm = 10\ mA * 100 * 1 \times 10^{-6} = 1\ \mu A$

Sinking Power vs. Ambient Temperature Derating

The following figure illustrates sinking power derating as a function of ambient temperature for the PXIe-4145.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 3. Sinking Power vs Ambient Temperature Derating

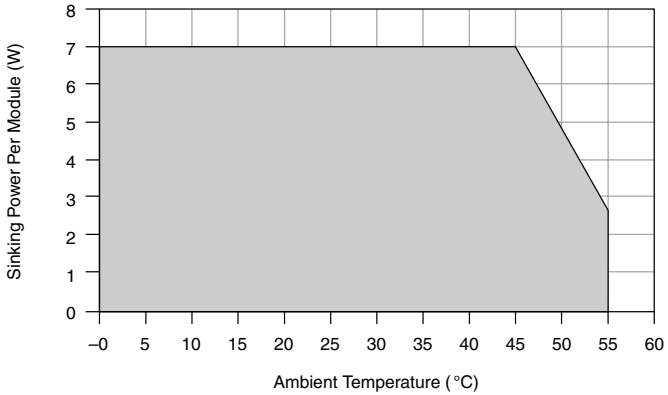

Additional Specifications

Settling time[4]	<100 µs to settle to 0.1% of voltage step, device configured for fast transient response, typical
Transient response	<100 µs to recover within ±20 mV after a load current change from 10% to 90% of range, device configured for fast transient response, typical
Wideband source noise	1.5 mV RMS (20 Hz to 20 MHz bandwidth), device configured for normal transient response, typical
Cable guard output impedance	10 kΩ, typical
Remote sense	
Voltage	Add 0.1% of LO lead drop to voltage accuracy specification
Current	No additional error due to lead drop
Maximum lead drop	Up to 1 V drop per lead for $\|V_{out}\| \leq 5$ V. For $\|V_{out}\| > 5$ V, keep sum of $\|V_{out}\|$ and total lead drop below 7 V


[4] Current limit set to ≥1 mA and ≥10% of the selected current limit range.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Load regulation	
Voltage	10 µV at connector pins per mA of output load when using local sense, typical
Current	20 pA + (1 ppm of range per volt of output change) when using local sense, typical
Isolation voltage, Channel-to-earth ground[5]	60 VDC, CAT I, verified by dielectric withstand test, 5 s, continuous, characteristic
Absolute maximum voltage between any terminal and LO	20 VDC, continuous

The following figures illustrate the effect of the transient response setting on the step response of the PXIe-4145 for different loads.


Figure 4. 1 mA Range No Load Step Response, Typical

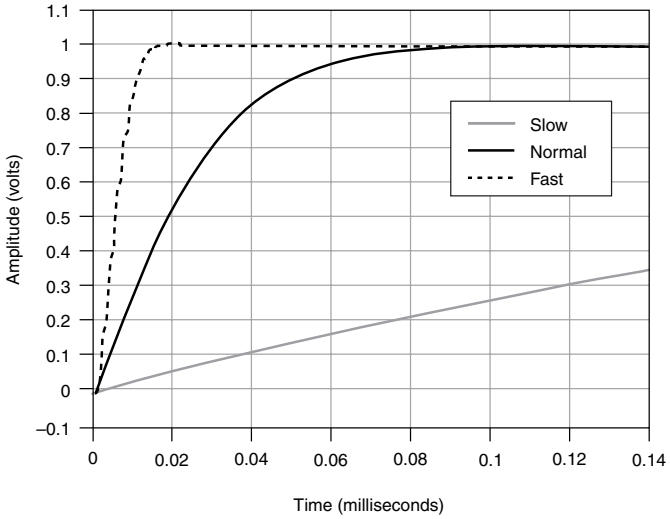

[5] Channels are isolated from earth ground but share a common LO.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 5. 1 mA Range, 100 nF Load Step Response, Typical

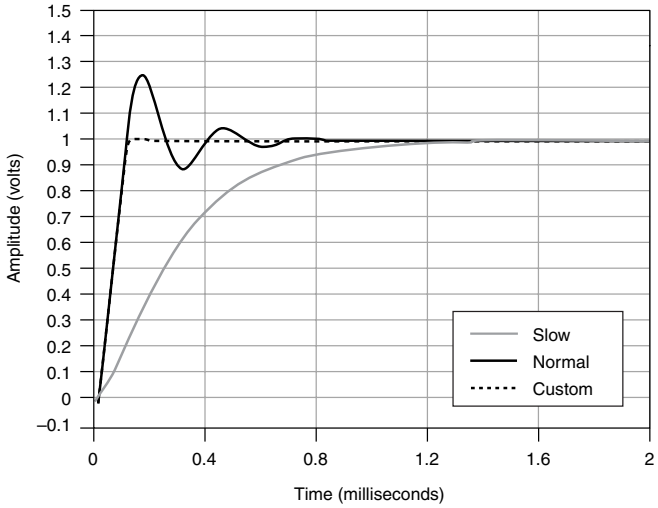

Related Information

Voltage Programming and Measurement Accuracy/Resolution on page 4

Current Programming and Measurement Accuracy/Resolution on page 4

Supplemental Specifications

Measurement and Update Timing

Available sample rates[6]	(600 kS/s)/*N* where *N*= 1, 2, 3, … 2^{20} and S is samples, nominal
Sample rate accuracy	±50 ppm
Maximum measure rate to host[7]	600,000 S/s per channel, continuous
Maximum source update rate[8]	100,000 updates/s

[6] When source-measuring, both the **niDCPower Source Delay** and **niDCPower Aperture Time** properties affect the sampling rate. When taking a measure record, only the **niDCPower Aperture Time** property affects the sampling rate.

[7] Load dependent settling time is not included. Normal DC noise rejection is used.

[8] As the source delay is adjusted, maximum source rates vary.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Input trigger to	
Source event delay	5 µs
Source event jitter	1.7 µs
Measure event jitter	1.7 µs

Triggers

Input triggers	
Types	Start, Source, Sequence Advance, Measure
Sources (PXI trigger lines 0 to 7)[9]	
Polarity	Configurable
Minimum pulse width	100 ns, nominal
Destinations[10] (PXI trigger lines 0 to 7)[9]	
Polarity	Active high (not configurable)
Minimum pulse width	>200 ns, nominal
Output triggers (events)	
Types	Source Complete, Sequence Iteration Complete, Sequence Engine Done, Measure Complete
Destinations (PXI trigger lines 0 to 7)[9]	
Polarity	Configurable
Pulse width	Configurable between 250 ns and 1.6 µs, nominal

Calibration Interval

Recommended calibration interval	1 year

[9] Pulse widths and logic levels are compliant with *PXI Express Hardware Specification Revision 1.0 ECN 1*.

[10] Input triggers can come from any source (PXI trigger or software trigger) and be exported to any PXI trigger line. This allows for easier multi-board synchronization regardless of the trigger source.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Physical Characteristics

Dimensions	3U, one-slot, PXI Express/CompactPCI Express module; 2.0 cm × 13.0 cm × 21.6 cm (0.8 in. × 5.1 in. × 8.5 in.), nominal
Weight	408 g (14.39 oz), nominal
Front panel connectors	25-position D-SUB, male

Power Requirement

PXI Express power requirement	2.1 A from the 12 V rail and 2.9 A from the 3.3 V rail

Environment

Maximum altitude	2,000 m (800 mbar) (at 25 °C ambient temperature)
Pollution Degree	2

Indoor use only.

Operating Environment

Ambient temperature range	0 °C to 55 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 low temperature limit and MIL-PRF-28800F Class 2 high temperature limit.)
Relative humidity range	10% to 70%, noncondensing; derate 1.3% per °C above 40 °C (Tested in accordance with IEC 60068-2-56.) (Tested in accordance with IEC 60068-2-56.)

Storage Environment

Ambient temperature range	-40 °C to 70 ºC (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 limits.)
Relative humidity range	5% to 95%, noncondensing (Tested in accordance with IEC 60068-2-56.)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Shock and Vibration

Operating shock	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Meets MIL-PRF-28800F Class 2 limits.)
Random vibration	
Operating	5 Hz to 500 Hz, 0.3 g_{rms} (Tested in accordance with IEC 60068-2-64.)
Nonoperating	5 Hz to 500 Hz, 2.4 g_{rms} (Tested in accordance with IEC 60068-2-64. Test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

Compliance and Certifications

Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1

Note For UL and other safety certifications, refer to the product label or the *Online Product Certification* section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions

Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.

Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Note For EMC declarations, certifications, and additional information, refer to the *Online Product Certification* section.

CE Compliance CE

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit *ni.com/certification*, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at *ni.com/environment*. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)

EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit *ni.com/environment/weee*.

电子信息产品污染控制管理办法（中国 RoHS）

中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令(RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 `ni.com/environment/rohs_china`。(For information about China RoHS compliance, go to `ni.com/environment/rohs_china`.)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help**»**Patents** in your software, the patents.txt file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2013—2017 National Instruments. All rights reserved.

376100B-01 Jan17

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP