

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments cFP-1808* at our website: *Click HERE*

Ethernet/Serial Interfaces for Compact FieldPoint

NI cFP-180x

- Distributed I/O interfaces for Ethernet and RS232 networks
- 4 or 8-slot Compact FieldPoint distributed Ethernet/serial network interfaces
- FieldPoint software for rapid distributed I/O access
- Modbus Support
- OPC server included
- Intelligent diagnostics and maintenance
- Industrial specifications for harsh environments
  - 50 g shock
  - 5 g vibration
  - -40 to 70 °C

Operating Systems

- Windows 2000/XP

Recommended Software

- LabVIEW
- LabVIEW Datalogging and Supervisory Control Module

Other Compatible Software

- LabWindows/CVI
- Measurement Studio
- Lookout
- VI Logger

Driver Software (included)

- Measurement & Automation Explorer
- OPC server (2.0 compliant)



Overview and Distributed Applications

National Instruments cFP-180x interfaces connect four or eight Compact FieldPoint I/O modules to a high-speed Ethernet network or to an RS232 serial port. With up to 100 Mb/s data communication rates and event-driven communications, an NI cFP-180x delivers a high-performance network connection for Compact FieldPoint that is easy to interface with a PC or PAC-like Compact FieldPoint embedded controller. One or more cFP-180x interfaces, connected by standard networking equipment, provide expanded I/O that you can control with a single Compact FieldPoint controller, see Figure 1. You can also build a PC-based distributed I/O and control system by connecting two or more cFP-180x devices to your PC.

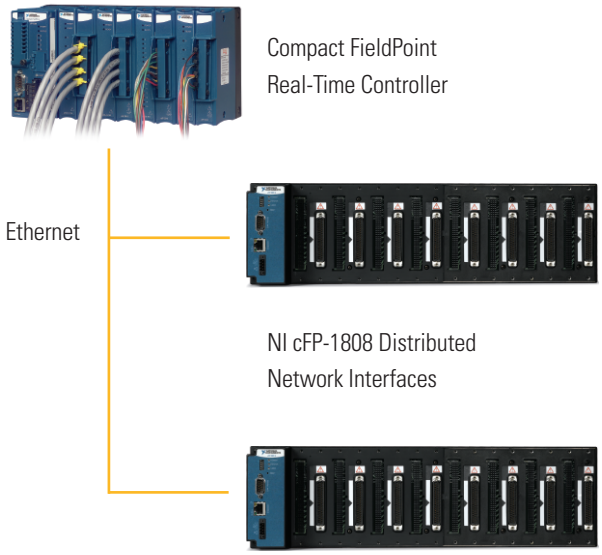


Figure 1. Expansion I/O for Compact FieldPoint Embedded Controller with cFP-1808 Network Interfaces

Hardware Architecture

A cFP-180x provides an integrated network interface (Ethernet or serial) and a 4 or 8-slot backplane, and it works with the same modules and connector blocks used in other Compact FieldPoint systems.

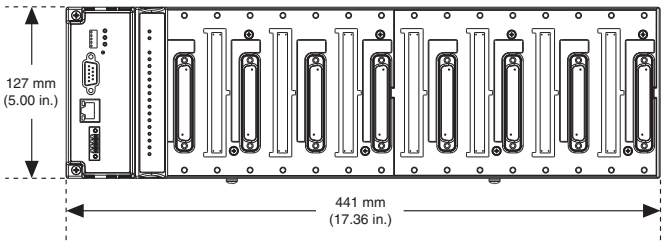


Figure 2. cFP-1808 Mechanical Dimensions

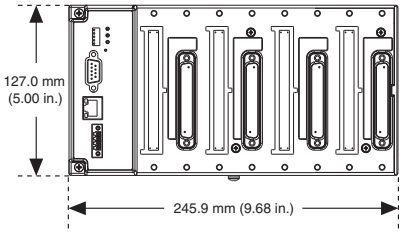


Figure 3. cFP-1804 Mechanical Dimensions

Building Ethernet-Based Distributed I/O Systems

A cFP-180x can communicate with Compact FieldPoint real-time embedded controllers; any Ethernet-based programmable automation controller (PAC); and a Windows computer running LabVIEW, LabWindows/CVI, Measurement Studio, Lookout, or your choice of OPC client application software. Using a cFP-180x, you can rapidly build flexible, modular distributed measurement and automation systems.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



Figure 4. Ethernet-based distributed systems work with Compact FieldPoint embedded controllers, PACs, human-machine interfaces, and Enterprise/SCADA systems.

Network Communications Interface

A cFP-180x connects directly to Ethernet networks, autonegotiating on the network for 10 Mb/s or 100 Mb/s communication rates. It includes an RJ-45 connector for connection to 10BaseT and 100BaseTX networks, using a protocol based on standard TCP/IP to maintain full compatibility with existing networks. FieldPoint builds on standard TCP/IP network protocols and adds a number of key enhancements, including event-driven communications and publisher-subscriber networking. In a publisher-subscriber architecture, one or more client PCs subscribe to I/O data from Compact FieldPoint banks. The network interface monitors connected I/O modules and publishes I/O data only when the value changes. Analog signals can change value within selectable ranges, called deadbands, without causing the system to report data. This event-driven method, along with data compression, helps you avoid unnecessary Ethernet traffic and maximizes communication efficiency. A cFP-180x also includes a standard DB-9 connector for RS232 serial communication. Through direct connectivity, you can read and write data directly from a program running on your PC or embedded controller. You access I/O through the serial interface using a serial protocol called Optomux, in the same way you would access data through classic FieldPoint network interfaces such as the FP-1000.

Configuring and Accessing Tags on a Compact FieldPoint System with LabVIEW 8

National Instruments LabVIEW 8 and Compact FieldPoint create a flexible PAC system that offers easy-to-access I/O through the FieldPoint programming environment. Accessing data from multiple cFP-180x distributed nodes with LabVIEW is as easy as three simple steps:

1. Configure IP address using NI Measurement & Automation Explorer (MAX)
2. Import a FieldPoint configuration file or add a new Compact FieldPoint system
3. Expand I/O in the LabVIEW Project and drag and drop I/O tags to VIs

After configuring the IP address for a FieldPoint bank in MAX, either import the configuration file created from MAX, or simply add a new target to a LabVIEW Project as shown in Figure 5.

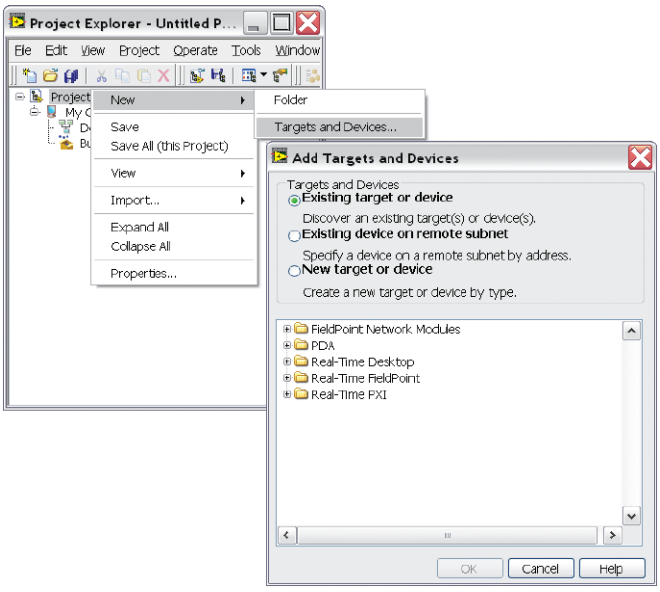


Figure 5. Add a new FieldPoint target to your LabVIEW 8 Project.

After adding all FieldPoint networks available on the network, you can expand each FieldPoint bank and see the I/O modules and tags available from the LabVIEW Project Explorer. Using these tags in an application is as easy as dragging the tag from the Project Explorer to the VI where the data is needed. LabVIEW automatically creates the correct FieldPoint read/write VI and associated tag.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

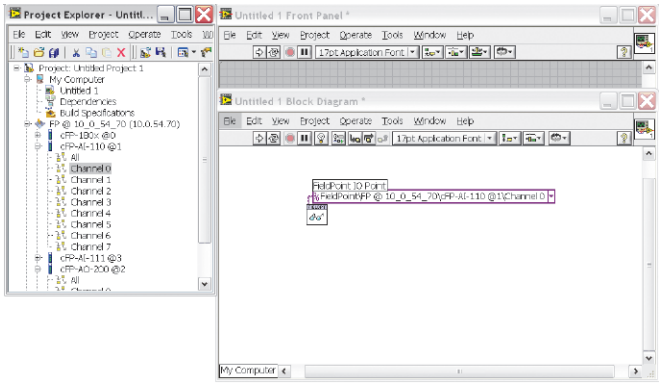


Figure 6. Drag and drop an I/O tag from a LabVIEW Project to any VI.

Accessing Network I/O Data on a cFP-180x Using Shared Variables

You can create a shared variable for any tag that is available on a cFP-180x bank connected to the network. You then can use this shared variable in multiple LabVIEW applications either targeted to Windows OS or running embedded on a Compact FieldPoint real-time controller such as the NI cFP-2120. To create a shared variable to be hosted on a Windows system, simply right-click on My Computer in the LabVIEW Project and select New Variable; select the option to bind this shared variable to a source, and then you can either select IO from your local LabVIEW Project or any I/O available on the network, as shown in Figure 7.

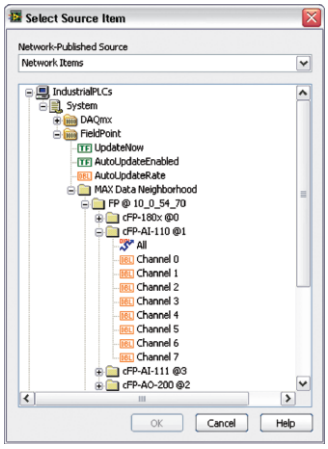


Figure 7. Compact FieldPoint distributed I/O channels are accessible as network items from LabVIEW.

After you create a shared variable, it appears in LabVIEW Project Manager and is available for use in your LabVIEW applications simply by dragging the variable from the Project Explorer to an existing VI (see Figure 8). From a PC, PAC, or embedded Compact FieldPoint controller, you can use MAX with LabVIEW 8 to configure I/O settings for the cFP-180x to access data on distributed Compact FieldPoint banks. Accessing distributed I/O is now easier than ever with LabVIEW 8 and a cFP-180x.

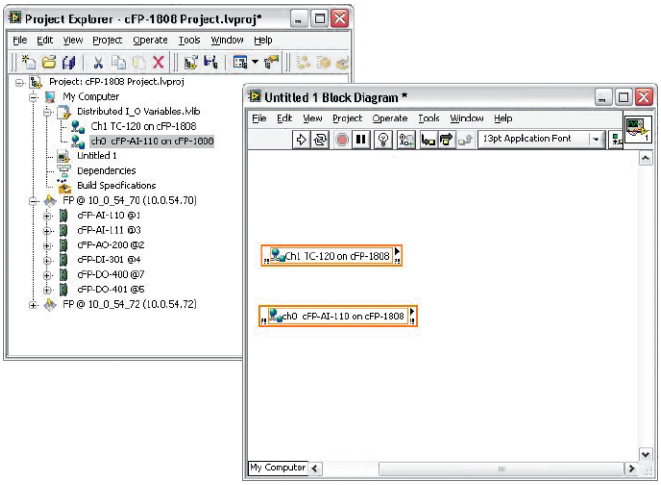


Figure 8. Use a shared variable to access distributed I/O for all channels.

Ordering Information

NI cFP-1808 779463-01
NI cFP-1804 779490-01
PS-5 (power supply 24 VDC, 5 A, universal power input) 778805-90

BUY NOW!

For complete product specifications, pricing, and accessory information, call (800) 813 3693 (U.S.) or go to **ni.com/fieldpoint**.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

Network

Network interface	10BaseT and 100BaseTX Ethernet
Compatibility	IEEE802.3
Communication rates	10 or 100 Mb/s, autonegotiated
Maximum cabling distance	100 m/segment
Maximum power to I/O modules	9 W
Maximum number of banks	Determined by network topology

Serial Port

One RS232 (DCE) serial port

Baud rate	300 to 115,200 b/s
Data bits	8
Stop bits	1
Parity	None
Flow control	None

Power Requirement

Power supply range	11 to 30 VDC
Recommended power supply	20 W
Power consumption	6.1 W + 1.1 (I/O module)

Safety Isolation Voltage

Isolation voltage is verified by a dielectric withstand test between module and backplane.

Continuous	250 V_{rms}, Measurement Category II
Withstand	2,300 V_{rms}, 5 s max

Physical Characteristics

Screw-terminal wiring	14 to 22 AWG copper wire with 7 mm (0.28 in.) of insulation stripped from the end
Torque for screw terminals	0.5 to 0.6 N • m (4.4 to 5.3 lb • in.)

Weight

cFP-1804	935 g (2 lb 1 oz)
cFP-1808	1,595 g (3 lb 8 oz)

Environmental

FieldPoint modules are intended for indoor use only. For outdoor use, they must be installed in a suitable sealed enclosure.

Operating temperature	-40 to 70 °C
Storage temperature	-55 to 85 °C
Relative humidity	10 to 90%, noncondensing
Maximum altitude	2,000 m; at higher altitudes the isolation voltage ratings must be lowered
Pollution Degree	2

Shock and Vibration

Operating vibration

Random (IEC 60068-2-64)	10 to 500 Hz, 5 g_{rms}
Sinusoidal (IEC 60068-2-6)	10 to 500 Hz, 5 g

Operating shock

(IEC 60068-2-27)	50 g, 3 ms half sine, 18 shocks at 6 orientations; 30 g, 11 ms half sine, 18 shocks at 6 orientations

Safety

This product is designed to meet the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1
- CAN/CSA-C22.2 No. 61010-1

Note: *For UL, hazardous location, and other safety certifications, refer to the product label or visit* **ni.com/certification**, *search by model number or product line, and click the appropriate link in the Certification column.*

Electromagnetic Compatibility

Emissions	EN 55011 Class A at 10 m FCC Part 15A above 1 GHz
Immunity	EN 61326:1997 + A2:2002, Table 1 CE, C-Tick, and FCC Part 15 (Class A) Compliant

Note: *For EMC compliance, operate this device with shielded cabling.*

CE Compliance

This product meets the essential requirements of applicable European directives, as amended for CE marking, as follows:

Low-voltage directive (safety)	73/23/EEC
Electromagnetic compatibility directive (EMC)	89/336/EEC

Note: *Refer to the Declaration of Conformity (DoC) for this product for any additional regulatory compliance information. To obtain the DoC for this product, visit* **ni.com/certification**, *search by model number or product line, and click the appropriate link in the Certification column.*

BUY ONLINE at **ni.com** or **CALL (800) 813 3693 (U.S.)**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

NI Services and Support



NI has the services and support to meet your needs around the globe and through the application life cycle – from planning and development through deployment and ongoing maintenance. We offer services and service levels to meet customer requirements in research, design, validation, and manufacturing. Visit **ni.com/services**.

Training and Certification

NI training is the fastest, most certain route to productivity with our products. NI training can shorten your learning curve, save development time, and reduce maintenance costs over the application life cycle. We schedule instructor-led courses in cities worldwide, or we can hold a course at your facility. We also offer a professional certification program that identifies individuals who have high levels of skill and knowledge on using NI products. Visit **ni.com/training**.

Professional Services

Our Professional Services Team is comprised of NI applications engineers, NI Consulting Services, and a worldwide National Instruments Alliance Partner program of more than 600 independent consultants and integrators. Services range from start-up assistance to turnkey system integration. Visit **ni.com/alliance**.

NATIONAL INSTRUMENTS™
Certified Alliance Partner

OEM Support

We offer design-in consulting and product integration assistance if you want to use our products for OEM applications. For information about special pricing and services for OEM customers, visit **ni.com/oem**.

Local Sales and Technical Support

In offices worldwide, our staff is local to the country, giving you access to engineers who speak your language. NI delivers industry-leading technical support through online knowledge bases, our applications engineers, and access to 14,000 measurement and automation professionals within NI Developer Exchange forums. Find immediate answers to your questions at **ni.com/support**.

We also offer service programs that provide automatic upgrades to your application development environment and higher levels of technical support. Visit **ni.com/ssp**.

Hardware Services

NI Factory Installation Services

NI Factory Installation Services (FIS) is the fastest and easiest way to use your PXI or PXI/SCXI combination systems right out of the box. Trained NI technicians install the software and hardware and configure the system to your specifications. NI extends the standard warranty by one year on hardware components (controllers, chassis, modules) purchased with FIS. To use FIS, simply configure your system online with **ni.com/pxiadvisor**.

Calibration Services

NI recognizes the need to maintain properly calibrated devices for high-accuracy measurements. We provide manual calibration procedures, services to recalibrate your products, and automated calibration software specifically designed for use by metrology laboratories. Visit **ni.com/calibration**.

Repair and Extended Warranty

NI provides complete repair services for our products. Express repair and advance replacement services are also available. We offer extended warranties to help you meet project life-cycle requirements. Visit **ni.com/services**.

NATIONAL INSTRUMENTS™

ni.com • (800) 813 3693
National Instruments • info@ni.com

342572A-01 2006-6507-161-101-D

© 2006 National Instruments Corporation. All rights reserved. CVI, FieldPoint, LabVIEW, Lookout, Measurement Studio, National Instruments, National Instruments Alliance Partner, NI, ni.com, and SCXI are trademarks of National Instruments. Other product and company names listed are trademarks or trade names of their respective companies.
A National Instruments Alliance Partner is a business entity independent from NI and has no agency, partnership, or joint-venture relationship with NI.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP