

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Newport CMA-25CC* at our website: *Click HERE*

CMA Series

Compact Motorized Actuators

Key Features


- *Up to 25 mm motorized travel in a light, very compact, and space saving design*
- *Replaces manual micrometer drives with very similar dimensions*
- *Stepper, open-loop DC, and closed-loop DC servo motor versions*
- *Integrated limit sensors/switches prevent component and motor damages*



460P stage with CMA actuators.



U200-G with CMA actuators.

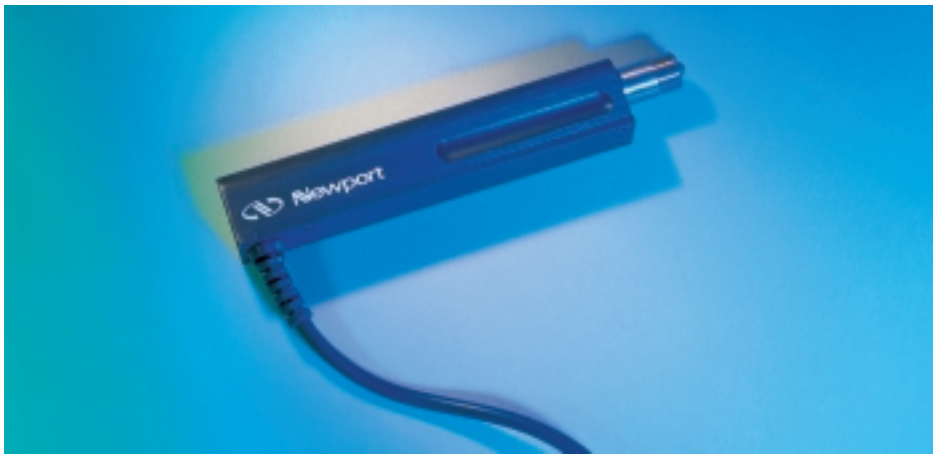



CMA Series actuators provide reliable motorized motion in a lightweight and very compact package. The CMA incorporates an excellent space saving design (only 19.7 mm height x 15.2 mm width) that allows it to be used with a wide variety of linear stages, mirror mounts, and OEM applications. The CMA is designed to fit your existing manual stages and other opto-mechanical components as a direct replacement for manual micrometers.

To provide the best fit for your application's requirements, the CMA Series actuators are available in stepper, open-loop DC, and closed-loop DC servo motor versions in 12.5 or 25 mm travel. The CMA provides sub-micron minimum incremental motion and can be used for loads up to 90 N.

To protect your investment, the CMA Series actuators include fixed integrated limit switches. Fail-safe limits cut motor power, preventing accidental over travel on DC open loop versions (CC), while limit-sensing switches provide feedback to your controller indicating that a limit switch has been reached on stepper motor (PP) and DC Servo motor (CCCL) versions.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

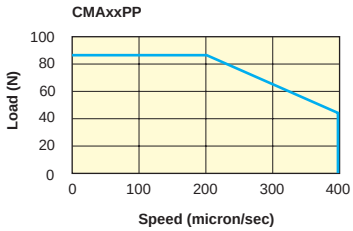

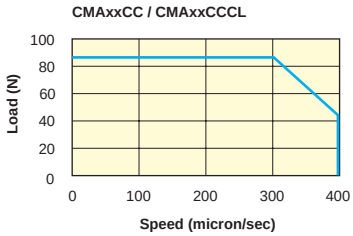

Design Details

Base Material	Aluminum
Drive Mechanism	Rolled lead screw
Drive Screw Pitch (mm)	0.5
Reduction Gear	256:1
Feedback	CCCL: Motor mounted rotary encoder, 40 pts/rev CC, PP: Open Loop (no encoder)
Limit Switches[1]	CC: Mechanical switches CCCL, PP: Limit sensors
Motor	CC, CCCL: DC servo motor UE10CC PP: 2-phase stepper motor UE10PP, 20 steps/rev
	PP, CCCL: 4.6 m with 25 pin Sub-D connector CC: 3 m with "phone jack" connector
Weight [lb (kg)]	0.2 (0.1)

1) Fail safe limit switches cut power to the motor when limit switch is activated. To move actuator, power must be reversed. Limit sensors send a signal to the controller, when the limit switch is activated. The controller should then cut power to the motor. Not using feedback from the limit sensors will result in damage to the CMA actuator.

Controller Compatibility

The compatible Newport controllers are matched to the CMA actuator Model number in the following matrix:

	CMA-12CC CMA-25CC	CMA-12PP CMA-25PP	CMA-12CCCL CMA-25CCCL
861	X		
ESP100 and ESP300	X	X	X
ESP6000 with DCIB			X
ESP6000 with UNIDRIV6000		X	X
XPS	X	X	X

Specifications

	CMA-12CC CMA-25CC	CMA-12PP CMA-25PP	CMA-12CCCL CMA-25CCCL
Travel Range (mm)		12.5 or 25	
Resolution (µm)		0.097656	0.048828
Minimum Incremental Motion (µm)	<0.5 typical	0.3	0.2
Bi-directional Repeatability[1] (µm)		4	3
Backlash		<15 µm before controller compensation	
Speed Range[2] (µm/s)	50–400	0–400	50–400
Axial Load Capacity[3] (N)		90	

1) Assumes controller backlash compensation.
2) Maximum speed depends on axial load. For CMA-xxCC when used with the 861 controller, the maximum speed is less than 400 µm/sec and is dependent on the strength of the battery supplying power.
3) Maximum axial load capacity listed. At higher speeds, load capacity will decrease according to graphs shown below.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Related Products



861 Hand-held Controller (see page 1055)

Motion Controller Options

For optimum performance and seamless compatibility, we recommend using one of the following Motion Controllers/Drivers:



XPS (page 1024)



ESP6000 with UNIDRIV6000 (page 1034)



ESP300 (page 1039)

Note: For CMACC operation, adaptor P/N ESP300-CMACC is needed to connect to the controller. To initiate jog motion via the ESP300 front panel, please see support.newport.com.




ESP100 (page 1045)

Ordering Information

Model	Description
CMA-12CC	12.5 mm Travel Open-loop DC CMA Actuator
CMA-25CC	25 mm Travel Open-loop DC CMA Actuator
CMA-12PP	12.5 mm Travel Open-loop Stepper CMA Actuator
CMA-25PP	25 mm Travel Open-loop Stepper CMA Actuator
CMA-12CCCL	12.5 mm Travel Closed-loop DC Servo CMA Actuator
CMA-25CCCL	25 mm Travel Closed-loop DC Servo CMA Actuator

Dimensions

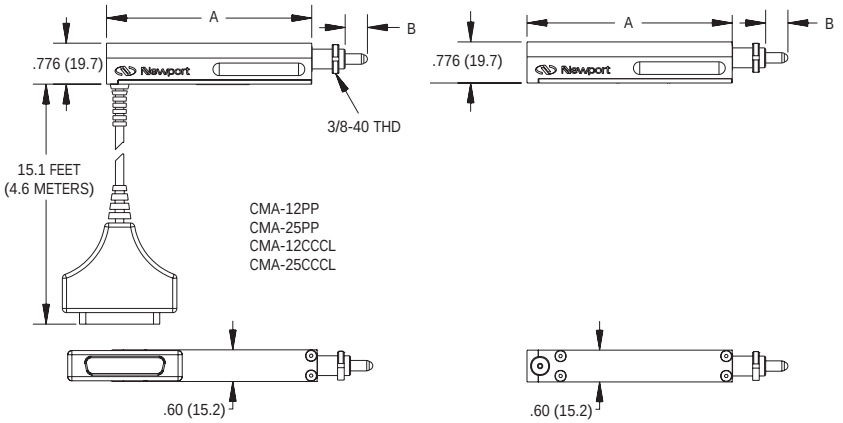

	Dimension [in. (mm)]	
Model	A	B
CMA-12CC	3.88 (98.6)	0.04–0.58 (0.9–14.7)
CMA-12PP	3.88 (98.6)	0.04–0.58 (0.9–14.7)
CMA-25CC	4.38 (111.3)	0.24–1.28 (6.0–32.5)
CMA-25PP	4.38 (111.3)	0.24–1.28 (6.0–32.5)
CMA-12CCCL	4.38 (111.3)	0.04–0.58 (0.9–14.7)
CMA-25CCCL	4.88 (124.0)	0.24–1.28 (6.0–32.5)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP