



# Artisan Scientific

QUALITY INSTRUMENTATION ... GUARANTEED

## Looking for more information?

Visit us on the web at <http://www.artisan-scientific.com> for more information:

- Price Quotations
- Drivers
- Technical Specifications, Manuals and Documentation

## Artisan Scientific is Your Source for Quality New and Certified-Used/Pre-owned Equipment

- Tens of Thousands of In-Stock Items
- Hundreds of Manufacturers Supported
- Fast Shipping and Delivery
- Leasing / Monthly Rentals
- Equipment Demos
- Consignment

### Service Center Repairs

Experienced Engineers and Technicians on staff in our State-of-the-art Full-Service In-House Service Center Facility

### InstraView™ Remote Inspection

Remotely inspect equipment before purchasing with our Innovative InstraView™ website at <http://www.instraview.com>

### We buy used equipment! We also offer credit for Buy-Backs and Trade-Ins

Sell your excess, underutilized, and idle used equipment. Contact one of our Customer Service Representatives today!

Talk to a live person: 888-88-SOURCE (888-887-6872) | Contact us by email: [sales@artisan-scientific.com](mailto:sales@artisan-scientific.com) | Visit our website: <http://www.artisan-scientific.com>



**Technical Sales**  
 United States  
 (866) 531-6285  
 info@ni.com

[Print](#) | [E-mail this Page](#)

[Requirements and Compatibility](#) | [Ordering Information](#) | [Detailed Specifications](#) | [Pinouts/Front Panel Connections](#)  
 For user manuals and dimensional drawings, visit the product page resources tab on ni.com.

Last Revised: 2010-03-02 11:34:58.0

[Back to Top](#)

## NI 9472

### 8 Ch, 24 V Logic, 100 $\mu$ s Sourcing C Series Digital Output Module



8-channel, 100  $\mu$ s digital output  
 6 to 30 V range, sourcing digital output  
 D-Sub or screw-terminal connector options

Hot-swappable operation  
 -40 to 70 °C operating range

#### Overview

The NI 9472 is an eight-channel, 100  $\mu$ s sourcing digital output module for any NI CompactDAQ or CompactRIO chassis. Each channel is compatible with 6 to 30 V signals and features 2,300 Vrms of transient overvoltage protection between the output channels and the backplane. Each channel also has an LED that indicates the state of that channel. With the NI 9472, you can connect directly to a variety of industrial devices such as motors, actuators, and relays. There are two connector options for the NI 9472 - a 10-position screw-terminal connector and a 25-position D-Sub connector. This industry-standard 25-position D-Sub connector provides for low-cost cabling to a wide variety of accessories from NI or other vendors. Many vendors with custom D-Sub cable fabrication services can deliver cables with a pinout that matches your exact application needs.

[Back to Top](#)

#### Requirements and Compatibility

##### OS Information

Real-Time OS  
 Windows

##### Driver Information

NI-DAQmx  
 NI-RIO

##### Software Compatibility

LabVIEW  
 LabVIEW SignalExpress  
 LabWindows/CVI  
 Visual Studio  
 Visual Studio .NET

[Back to Top](#)

#### Comparison Tables

Product Name	Signal Levels	Number of Channels	Current Rating	Speed	Connectivity	Special Features
NI 9472	6 to 30 V	8	750 mA/ch	100 $\mu$ s	Screw-terminal, D-Sub	Sourcing digital output
NI 9474	6 to 30 V	8	1 A/ch	1 $\mu$ s	Screw terminal	Sourcing digital output
NI 9475	Up to 60 V	8	1 A/ch	1 $\mu$ s	27-pin D-Sub	Sourcing digital output

Product Name	Signal Levels	Number of Channels	Current Rating	Speed	Connectivity	Special Features
NI 9476	6 to 36 V	32	250 mA/ch	500 $\mu$ s	37-pin D-Sub	Sourcing digital output
NI 9477	5 to 60 V	32	1 A/ch	8 $\mu$ s	37-pin D-Sub	Sinking digital output
NI 9478	5 to 50 V	16	1.2 A/ch	7 $\mu$ s	37-pin D-Sub	Solenoid and valve drive module

### Application and Technology

High-performance digital output and switching modules for NI CompactDAQ systems, CompactRIO embedded systems, and R Series expansion chassis provide extended voltage ranges and high-current-switching capacity for direct control of a wide array of industrial and automotive actuators. Each module features an integrated connector junction box with screw-terminal or cable options for flexible, low-cost signal wiring. All modules feature CompactRIO extreme industrial certifications and ratings including -40 to 70 °C operating temperatures and 50 g shock.

When used in CompactRIO, C Series digital output modules connect directly to reconfigurable I/O (RIO) field-programmable gate array (FPGA) hardware to create high-performance embedded systems. The reconfigurable FPGA hardware within CompactRIO provides a variety of options for timing, triggering, synchronization, digital waveform generation, or digital communication. For instance, with CompactRIO you can implement a circuit to generate pulse-width modulation (PWM) outputs for controlling motors, heaters, or fans as well as to perform pulse code modulation encoding (PCME) for wireless telemetry applications.

### C Series Compatibility

The C Series hardware family features more than 50 measurement modules and several chassis and carriers for deployment. With this variety of modules, you can mix and match measurements such as temperature, acceleration, flow, pressure, strain, acoustic, voltage, current, digital, and more to create a custom system. Install the modules in one of several carriers to create a single module USB, Ethernet, or Wi-Fi system, or combine them in chassis such as NI CompactDAQ and CompactRIO to create a mixed-measurement system with synchronized measurements. You can install up to eight modules in a simple, complete NI CompactDAQ USB data acquisition system to synchronize all of the analog output, analog input, and digital I/O from the modules. For a system without a PC, CompactRIO holds up to eight modules and features a built-in processor, RAM, and storage for an embedded data logger or control unit. For higher-speed control, CompactRIO chassis incorporate an FPGA that you can program with NI LabVIEW software to achieve silicon-speed processing on I/O data from C Series modules.

### Ordering Information

For a complete list of accessories, visit the product page on ni.com.

Products	Part Number	Recommended Accessories	Part Number
<b>NI 9472</b>			
<b>NI 9472</b> Each NI 9472 requires: 1 Connectivity Accessory	779004-01	<b>Connectivity Accessory:</b> Screw Terminals - NI 9932 Backshell with 10-pos connector block (qty 1)	779017-01
<b>NI 9472</b>			
<b>NI 9472 with DSub</b> Each NI 9472 with DSub requires: 1 Connectivity Accessory	779137-01	<b>Connectivity Accessory:</b> Screw Terminals - NI 9934 25pin D-Sub connector kit	779104-01


### Software Recommendations

#### NI LabVIEW Professional Development System for Windows



- Easy-to-use graphical development environment
- Tight integration with a wide range of measurement hardware
- Rapid user interface development for displaying live data
- Extensive signal processing, analysis, and math functionality
- Source code control integration and code complexity metrics
- Support for Windows XP/Vista/7 (32-bit) and Windows Vista/7 (64-bit)


#### NI LabVIEW FPGA Module



- Define your own control algorithms with loop rates up to 40 MHz
- Execute multiple tasks simultaneously and deterministically
- Create your own I/O hardware without VHDL coding or board design
- Implement custom timing and triggering logic with 25 ns resolution
- Graphically configure FPGAs on NI reconfigurable I/O (RIO) hardware targets

#### LabVIEW Real-Time Module

Design real-time applications with graphical



#### programming

Download to a dedicated target for reliable, deterministic performance

Deploy as a distributed, stand-alone, or embedded system

Use built-in PID control functions or create your own control algorithms

Purchase individually or as part of the NI Developer Suite

## Support and Services

### System Assurance Programs

NI system assurance programs are designed to make it even easier for you to own an NI system. These programs include configuration and deployment services for your NI PXI, CompactRIO, or Compact FieldPoint system. The NI Basic System Assurance Program provides a simple integration test and ensures that your system is delivered completely assembled in one box. When you configure your system with the NI Standard System Assurance Program, you can select from available NI system driver sets and application development environments to create customized, reorderable software configurations. Your system arrives fully assembled and tested in one box with your software preinstalled. When you order your system with the standard program, you also receive system-specific documentation including a bill of materials, an integration test report, a recommended maintenance plan, and frequently asked question documents. Finally, the standard program reduces the total cost of owning an NI system by providing three years of warranty coverage and calibration service. Use the online product advisors at [ni.com/advisor](http://ni.com/advisor) to find a system assurance program to meet your needs.

### Calibration

NI measurement hardware is calibrated to ensure measurement accuracy and verify that the device meets its published specifications. NI offers a number of calibration services to help maintain the ongoing accuracy of your measurement hardware. These services allow you to be completely confident in your measurements, and help you maintain compliance to standards like ISO 9001, ANSI/NCSL Z540-1 and ISO/IEC 17025. To learn more about NI calibration services or to locate a qualified service center near you, contact your local sales office or visit [ni.com/calibration](http://ni.com/calibration).

### Technical Support

Get answers to your technical questions using the following National Instruments resources.

**Support** - Visit [ni.com/support](http://ni.com/support) to access the NI KnowledgeBase, example programs, and tutorials or to contact our applications engineers who are located in NI sales offices around the world and speak the local language.

**Discussion Forums** - Visit [forums.ni.com](http://forums.ni.com) for a diverse set of discussion boards on topics you care about.

**Online Community** - Visit [community.ni.com](http://community.ni.com) to find, contribute, or collaborate on customer-contributed technical content with users like you.

### Repair

While you may never need your hardware repaired, NI understands that unexpected events may lead to necessary repairs. NI offers repair services performed by highly trained technicians who quickly return your device with the guarantee that it will perform to factory specifications. For more information, visit [ni.com/repair](http://ni.com/repair).

### Training and Certifications

The NI training and certification program delivers the fastest, most certain route to increased proficiency and productivity using NI software and hardware. Training builds the skills to more efficiently develop robust, maintainable applications, while certification validates your knowledge and ability.

**Classroom training in cities worldwide** - the most comprehensive hands-on training taught by engineers.

**On-site training at your facility** - an excellent option to train multiple employees at the same time.

**Online instructor-led training** - lower-cost, remote training if classroom or on-site courses are not possible.

**Course kits** - lowest-cost, self-paced training that you can use as reference guides.

**Training memberships and training credits** - to buy now and schedule training later.

Visit [ni.com/training](http://ni.com/training) for more information.

### Extended Warranty

NI offers options for extending the standard product warranty to meet the life-cycle requirements of your project. In addition, because NI understands that your requirements may change, the extended warranty is flexible in length and easily renewed. For more information, visit [ni.com/warranty](http://ni.com/warranty).

### OEM

NI offers design-in consulting and product integration assistance if you need NI products for OEM applications. For information about special pricing and services for OEM customers, visit [ni.com/oem](http://ni.com/oem).

### Alliance

Our Professional Services Team is comprised of NI applications engineers, NI Consulting Services, and a worldwide National Instruments Alliance Partner program of more than 600 independent consultants and integrators. Services range from start-up assistance to turnkey system integration. Visit [ni.com/alliance](http://ni.com/alliance).

## Detailed Specifications

[View Detailed Specifications](#) [Table of Contents](#)

The following specifications are typical for the range –40 to 70 °C unless otherwise noted. All voltages are relative to COM unless otherwise noted. The specifications are the same for the NI 9472 and the NI 9474 unless otherwise noted.

### Output Characteristics

Number of channels	8 digital output channels
Output type	Sourcing
Power-on output state	Channels off
External power supply voltage range ( $V_{sup}$ )	
NI 9472	6–30 VDC
NI 9474	5–30 VDC
Output impedance ( $R_0$ )	
Typical	0.07 $\Omega$
Maximum	0.13 $\Omega$
Continuous output current ( $I_0$ ), per channel	
NI 9472	0.75 A max
NI 9474	1 A max
Output voltage ( $V_0$ )	$V_{sup} - (I_0 \cdot R_0)$
I/O protection	
Voltage	30 VDC max
Reversed voltage	None

Short-circuit behavior		
Current	Channel Behavior	Module Protection
0 to 1 A	Channel does not trip	Module is not damaged
1 to 6 A	Channel does not trip	Module may be damaged
6 to 13 A	Channel may trip	Module may be damaged
>13 A	Channel trips	Module is not damaged

Short-circuit trip time	10 $\mu$ s at 13 A
Output delay time (full load)	
NI 9472	100 $\mu$ s max
NI 9474	1 $\mu$ s max
MTBF	
NI 9472	1,113,301 hours at 25 °C; Bellcore Issue 2, Method 1, Case 3, Limited Part Stress Method
NI 9474	479,889 hours at 25 °C; Bellcore Issue 2, Method 1, Case 3, Limited Part Stress Method

**Note** Contact NI for Bellcore MTBF specifications at other temperatures or for MIL-HDBK-217F specifications.

### NI 9472 Power Requirements

[Back to Detailed Specs](#)

Power consumption from chassis	
Active mode	230 mW max
Sleep mode	0.4 mW max

## Thermal dissipation (at 70 °C)

Active mode	1.5 W max
Sleep mode	55 mW max

**NI 9474 Power Requirements**[Back to Detailed Specs](#)

## Power consumption from chassis

Active mode	660 mW max
Sleep mode	0.6 mW max

## Thermal dissipation (at 70 °C)

Active mode	1.5 W max
Sleep mode	0.6 mW max

**Physical Characteristics**[Back to Detailed Specs](#)

If you need to clean the module, wipe it with a dry towel.

Screw-terminal wiring	12 to 24 AWG copper conductor wire with 10 mm (0.39 in.) of insulation stripped from the end
Torque for screw terminals	0.5 to 0.6 N · m (4.4 to 5.3 lb · in.)
Ferrules	0.25 mm <sup>2</sup> to 2.5 mm <sup>2</sup>
Weight	
NI 9472/9474 with screw terminal	150 g (5.3 oz)
NI 9472 with DSUB	145 g (5.1 oz)

**Safety**[Back to Detailed Specs](#)**NI 9472/9474 with Screw Terminal Safety Voltages**

Connect only voltages that are within the following limits.

Channel-to-COM	30 VDC max
----------------	------------

## Isolation

Channel-to-channel	None
Channel-to-earth ground	
Continuous	250 V <sub>rms</sub> , Measurement Category II
Withstand	2,300 V <sub>rms</sub> , verified by a 5 s dielectric withstand test

Measurement Category II is for measurements performed on circuits directly connected to the electrical distribution system. This category refers to local-level electrical distribution, such as that provided by a standard wall outlet (e.g., 115 V for U.S. or 230 V for Europe). Examples of Measurement Category II are measurements performed on household appliances, portable tools, and similar products.

**Caution** Do *not* connect the NI 9472/9474 with screw terminal to signals or use for measurements within Measurement Categories III or IV.

**NI 9472 with DSUB Safety Voltages**

Connect only voltages that are within the following limits.

Channel-to-COM	30 VDC max
----------------	------------

## Isolation

Channel-to-channel	None
Channel-to-earth ground	
Continuous	60 VDC, Measurement Category I
Withstand	1,000 V <sub>rms</sub> , verified by a 5 s dielectric withstand test

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as MAINS <sup>1</sup> voltage. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.

**Caution** Do *not* connect the NI 9472 with DSUB to signals or use for measurements within Measurement Categories II, III, or IV.

**Safety Standards**

This product is designed to meet the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

IEC 61010-1, EN 61010-1  
UL 61010-1, CSA 61010-1

**Note** For UL and other safety certifications, refer to the product label or the *Online Product Certification* section.

#### Hazardous Locations

U.S. (UL)	Class I, Division 2, Groups A, B, C, D, T4; Class I, Zone 2, AEx nC IIC T4
Canada (C-UL)	Class I, Division 2, Groups A, B, C, D, T4; Class I, Zone 2, Ex nC IIC T4
Europe (DEMKO)	EEx nC IIC T4

#### Environmental

[Back to Detailed Specs](#)

National Instruments C Series modules are intended for indoor use only but may be used outdoors if installed in a suitable enclosure. Refer to the manual for the chassis you are using for more information about meeting these specifications.

Operating temperature (IEC 60068-2-1, IEC 60068-2-2)	−40 to 70 °C
Storage temperature (IEC 60068-2-1, IEC 60068-2-2)	−40 to 85 °C
Ingress protection	IP 40
Operating humidity (IEC 60068-2-56)	10 to 90% RH, noncondensing
Storage humidity (IEC 60068-2-56)	5 to 95% RH, noncondensing
Maximum altitude	2,000 m
Pollution Degree (IEC 60664)	2

#### Shock and Vibration

[Back to Detailed Specs](#)

To meet these specifications, you must panel mount the system. If you are using the NI 9472/9474 with screw terminal, you also must either affix ferrules to the ends of the terminal wires or use the NI 9932 backshell kit to protect the connections.

Operating vibration	
Random (IEC 60068-2-64)	5 grms, 10 to 500 Hz
Sinusoidal (IEC 60068-2-6)	5 g, 10 to 500 Hz
Operating shock (IEC 60068-2-27)	30 g, 11 ms half sine, 50 g, 3 ms half sine, 18 shocks at 6 orientations

#### Electromagnetic Compatibility

[Back to Detailed Specs](#)

This product is designed to meet the requirements of the following standards of EMC for electrical equipment for measurement, control, and laboratory use:

EN 61326 EMC requirements; Industrial Immunity  
EN 55011 Emissions; Group 1, Class A  
CE, C-Tick, ICES, and FCC Part 15 Emissions; Class A

**Note** For EMC compliance, operate this device with double-shielded cables.

#### CE Compliance

[Back to Detailed Specs](#)

This product meets the essential requirements of applicable European Directives, as amended for CE marking, as follows:

2006/95/EC; Low-Voltage Directive (safety)  
2004/108/EC; Electromagnetic Compatibility Directive (EMC)

**Note** For the standards applied to assess the EMC of this product, refer to the *Online Product Certification* section.

#### Online Product Certification

[Back to Detailed Specs](#)

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit [ni.com/certification](http://ni.com/certification), search by module number or product line, and click the appropriate link in the Certification column.

#### Environmental Management

[Back to Detailed Specs](#)

National Instruments is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial not only to the environment but also to NI customers.

For additional environmental information, refer to the *NI and the Environment* Web page at [ni.com/environment](http://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

#### Waste Electrical and Electronic Equipment (WEEE)

[Back to Detailed Specs](#)

---

**EU Customers** At the end of their life cycle, all products *must* be sent to a WEEE recycling center. For more information about WEEE recycling centers and National Instruments WEEE initiatives, visit [ni.com/environment/wEEE.htm](http://ni.com/environment/wEEE.htm).

#### 电子信息产品污染控制管理办法（中国 RoHS）




中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。  
关于 National Instruments 中国 RoHS 合规性信息, 请登录 [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china)。  
(For Information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china).)

<sup>1</sup> MAINS is defined as the (hazardous live) electrical supply system to which equipment is designed to be connected for the purpose of powering the equipment. Suitably rated measuring circuits may be connected to the MAINS for measuring purposes.


---



**Pinouts/Front Panel Connections**

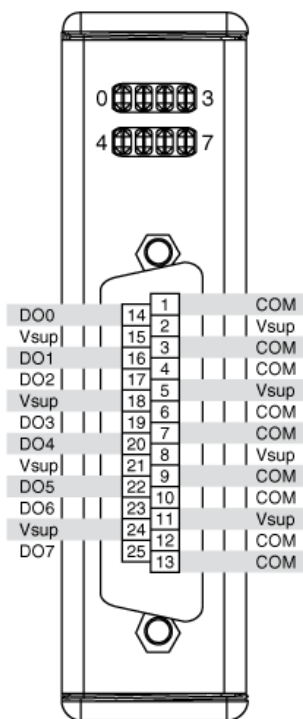

NI 9472/9474 with Screw Terminal

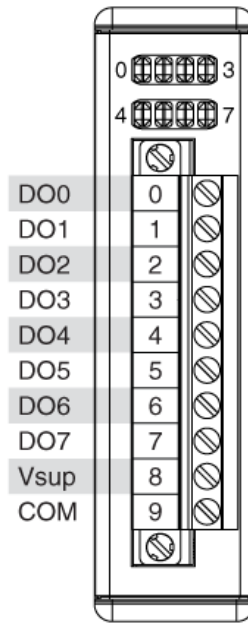

NI 9472 with DSUB

©2010 National Instruments. All rights reserved. CompactRIO, CVI, FieldPoint, LabVIEW, National Instruments, National Instruments Alliance Partner, NI, ni.com, NI CompactDAQ, and SignalExpress are trademarks of National Instruments. The mark LabWindows is used under a license from Microsoft Corporation. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other product and company names listed are trademarks or trade names of their respective companies. A National Instruments Alliance Partner is a business entity independent from National Instruments and has no agency, partnership, or joint-venture relationship with National Instruments.

[My Profile](#) | [RSS](#) | [Privacy](#) | [Legal](#) | [Contact NI](#) © 2010 National Instruments Corporation. All rights reserved.



# Artisan Scientific

QUALITY INSTRUMENTATION ... GUARANTEED

## Looking for more information?

Visit us on the web at <http://www.artisan-scientific.com> for more information:

- Price Quotations
- Drivers
- Technical Specifications, Manuals and Documentation

## Artisan Scientific is Your Source for Quality New and Certified-Used/Pre-owned Equipment

- Tens of Thousands of In-Stock Items
- Hundreds of Manufacturers Supported
- Fast Shipping and Delivery
- Leasing / Monthly Rentals
- Equipment Demos
- Consignment

### Service Center Repairs

Experienced Engineers and Technicians on staff in our State-of-the-art Full-Service In-House Service Center Facility

### InstraView™ Remote Inspection

Remotely inspect equipment before purchasing with our Innovative InstraView™ website at <http://www.instraview.com>

### We buy used equipment! We also offer credit for Buy-Backs and Trade-Ins

Sell your excess, underutilized, and idle used equipment. Contact one of our Customer Service Representatives today!

Talk to a live person: 888-88-SOURCE (888-887-6872) | Contact us by email: [sales@artisan-scientific.com](mailto:sales@artisan-scientific.com) | Visit our website: <http://www.artisan-scientific.com>