



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

High-Speed Counter Modules for Compact FieldPoint

NI [c]FP-CTR-500, NI [c]FP-CTR-502

- 8 inputs
 - 5 to 30 VDC inputs
 - 16-bit counter registers
 - 50 kHz, maximum
 - Gate inputs and digital outputs
 - Cascadable counters for higher counts
- 2,300 V_{rms} bank isolation for transient overvoltage protection
- Hot-swappable with autoconfiguration
- -40 to 70 °C operating range



Module	Counter Inputs	Input Ranges	Input Type	Counter Resolution	Gate Inputs	Configurable Outputs	Internal Reference Clock for Frequency Measurements	Maximum Input Frequency
[c]FP-CTR-500	8	10 to 30 VDC	Sinking	16-bit, cascadable to 128-bit	4	4	1 and 32 kHz	50 kHz
[c]FP-CTR-502	8	5 to 30 VDC	Sourcing	16-bit, cascadable to 128-bit	4	4	1 and 32 kHz	50 kHz

Overview

The NI cFP-CTR-50x devices are versatile, high-speed digital counter input modules for Compact FieldPoint that you can use to count digital signals ranging from 5 to 30 VDC and to measure frequency. These modules are fast enough to handle input signals up to 50 kHz for high-speed applications and flexible enough to measure frequency using the internal frequency reference or the external gate inputs. These powerful and versatile counter modules feature configurable lowpass filters to eliminate high-frequency noise and cascadable counter channels that you can use to create counters up to 128 bits wide to store trillions of counts. For discrete control applications such as packaging, you can configure the digital output channels to automatically energize external devices.

All the modules include onboard diagnostics to ensure trouble-free installation and maintenance.

Digital I/O Modules

The CTR-500 and CTR-502 counter modules include eight 16-bit, 50 kHz counters with dedicated clock inputs. For higher-resolution counting, you can combine counter channels to provide cascaded counters of up to 128 bits. In addition, for each counter, you can set a terminal count at which the counter automatically rolls over or resets. For frequency measurement, you can configure each channel to use any one of the four gate inputs provided. In this mode, you can enable counting only when the state of the specified gate input is logic high. By sending the digital pulse

train to the gate input and using the internal reference clock of 1 or 32 kHz, you can measure the frequency of the incoming pulse train. Because you can read the state of the gate input, you can also use the four gate inputs as general-purpose digital input channels.

You can configure each of the four counter outputs to either pulse or toggle states when you reach the terminal count for a counter input. This is useful when you need to energize external equipment upon reaching a particular count for applications such as packaging. You can also use each of the outputs as general-purpose digital outputs.

The CTR-500 modules work with 10 to 30 VDC sourcing devices and provide sourcing outputs. A sourcing device connects and disconnects a voltage to and from the counter module. The CTR-500 uses a common ground plane for all the digital input channels.

The CTR-502 works with 5 to 30 VDC sinking devices and provides sinking outputs. A sinking device connects and disconnects a common terminal to and from the counter module. The CTR-502 uses a common ground plane for all the digital input channels.

All the channels on the digital input modules feature LEDs that indicate the input state of each channel.

Isolation

CTR-50x modules feature optical bank isolation with 2,300 V_{rms} of breakdown isolation. These Compact FieldPoint and FieldPoint modules do not have channel-to-channel isolation.

High-Speed Counter Modules for Compact FieldPoint

Field I/O Connections

Compact FieldPoint and FieldPoint modules include a built-in power distribution bus that provides multiple power connections on the module. A field-wired power supply connected to the voltage (V) and common (C) terminals is internally connected to a power distribution bus that offers additional breakout terminals for voltage supply (V_{SUP}) and common (COM). These terminals deliver a convenient way to distribute power to field devices that require external power.

The CTR-500 and CTR-502 have:

- 8 high-speed digital counter input terminals (V_{IN})
- 4 digital gate input terminals (V_{IN})
- 4 digital output terminals (V_{OUT})
- 8 common terminals (COM)
- 8 power connections to power field devices (V_{SUP})

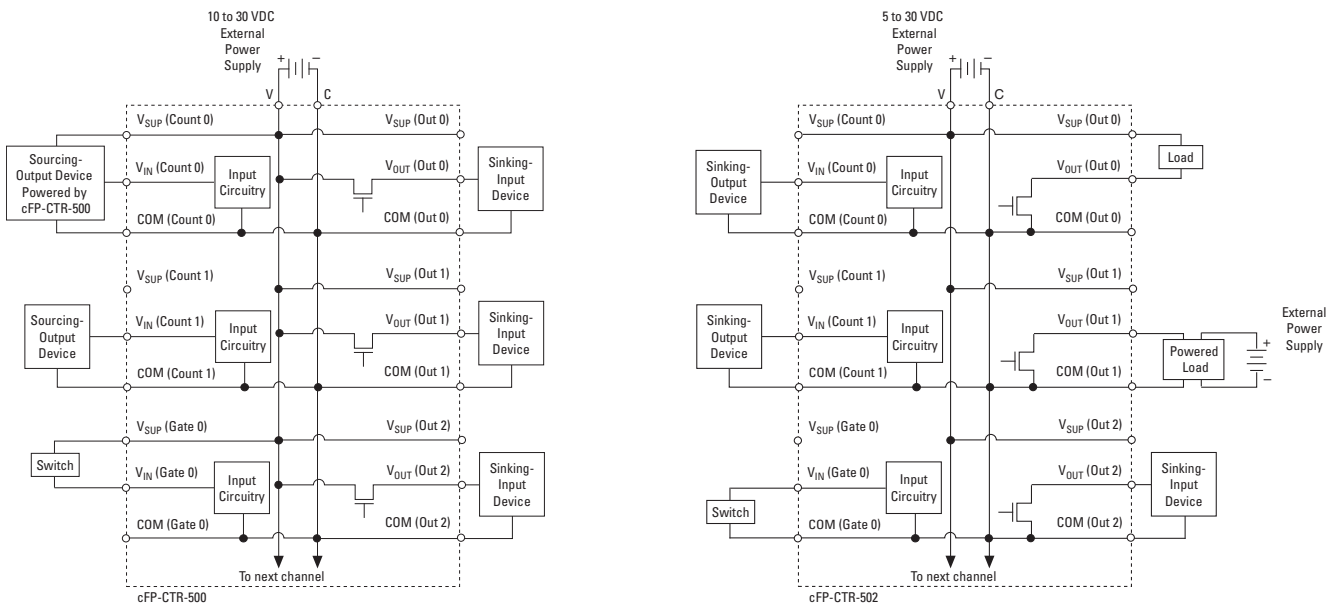


Figure 1. Wiring Schematics for CTR Modules

Ordering Information

NI cFP-CTR-500.....	777318-500
NI cFP-CTR-502.....	777318-502

Recommended Compact FieldPoint System Products

NI cFP-2020	777317-2020
NI cFP-BP-4.....	778617-04
NI cFP-CB-1.....	778618-01
NI PS-5 power supply.....	778805-90
NI Developer Suite Professional Control Edition.....	777906-03

FieldPoint

NI FP-CTR-500	777518-500
NI FP-CTR-502	777518-502

Recommended FieldPoint System Products

NI FP-1601	777792-01
NI FP-TB-1.....	777519-01
NI PS-4 power supply.....	778586-90
NI Developer Suite Standard Control Edition	777905-03

BUY NOW!

For complete product specifications, pricing, and accessory information, call 800 813 3693 (U.S.) or go to ni.com/compactfieldpoint.

BUY ONLINE at ni.com or CALL 800 813 3693 (U.S.)

High-Speed Counter Modules for Compact FieldPoint

Specifications

Typical for -40 to 60 °C unless otherwise noted.

Input Characteristics

Input channels.....	12 (8 count, 4 gate)
Input type	
cFP-CTR-500.....	10 to 30 VDC, sinking
cFP-CTR-502.....	5 to 30 VDC, sourcing
Maximum input voltage.....	30 VDC
Input threshold level	
cFP-CTR-500.....	8 V typ 6 V min 10 V max
cFP-CTR-502.....	V _{SUP} – 2.5 V typ V _{SUP} – 3.0 V min V _{SUP} – 2.0 V max (V _{SUP} is the external supply voltage)
Input current limiting	
cFP-CTR-500.....	5 mA
cFP-CTR-502.....	6 mA
Input bandwidth	
Count inputs.....	50 kHz or software-enabled 200 kHz lowpass filter
Gate inputs.....	50 kHz
Maximum off-state leakage current for external devices	
cFP-CTR-500.....	0.2 mA
cFP-CTR-502.....	0.3 mA

Output Characteristics

Output channels.....	4
Output type	
cFP-CTR-500.....	10 to 30 VDC sourcing, compatible with most 12 and 24 VDC devices
cFP-CTR-502.....	5 to 30 VDC sinking, compatible with TTL and other 5, 12, and 24 VDC devices
Supply voltage	
cFP-CTR-500.....	10 to 30 VDC, user-provided
cFP-CTR-502.....	5 to 30 VDC, user-provided
Maximum output current	
FP-CTR-500/502.....	1 A per channel
cFP-CTR-500/502.....	1 A per channel at -40 to 50 °C; 0.75 A per channel at 50 to 60 °C
Maximum output current on all channels.....	4 A
Output impedance	
cFP-CTR-500.....	0.3 Ω
cFP-CTR-502.....	0.12 Ω
Output bandwidth.....	16 kHz for a current flow ≥3.2 mA
Maximum off-state leakage current...	25 μA

Power Requirement

Power from network module.....	800 mW
--------------------------------	--------

Physical Characteristics

LED indicators	
POWER (green).....	Power on and self-test passed
READY (green).....	Module configured and ready
Count inputs <0..7> (green).....	On/off state of counter input
Gate inputs <0..3> (green).....	On/off state of gate input
Outputs <0..3> (green).....	On/off state of output
Dimensions (including terminal base)	10.7 by 10.9 by 9.1 cm (4.2 by 4.3 by 3.6 in.)
Weight	
FP-CTR-500/502.....	130 g (4.6 oz)
cFP-CTR-500/502.....	100 g (3.5 oz)

Isolation Voltage

Maximum isolation voltage.....	250 V _{rms} , Installation Category II
Channel-to-channel isolation.....	No isolation between channels
Transient overvoltage.....	2,300 V _{rms}

Environment

Operating temperature	
FP-CTR-500/502.....	-40 to 70 °C
cFP-CTR-500/502.....	-40 to 60 °C
Storage temperature.....	-55 to 85 °C
Relative humidity.....	10 to 90%, noncondensing

Shock and Vibration

Operating vibration, random (IEC 60068-2-64).....	10 to 500 Hz, 5 g _{rms}
Operating vibration, sinusoidal (IEC 60068-2-6).....	10 to 500 Hz, 5 g
Operating shock (IEC 60068-2-27).....	50 g, 3 ms half sine, 18 shocks at 6 orientations; 30 g, 11 ms half sine, 18 shocks at 6 orientations

High-Speed Counter Modules for Compact FieldPoint

Safety and Compliance

Safety

This product is designed to meet the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1

Note: For UL and other safety certifications, refer to the product label or visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Electromagnetic Compatibility

This product is designed to meet the requirements of the following standards of EMC for electrical equipment for measurement, control, and laboratory use:

- EN 61326 EMC requirements; Minimum Immunity
- EN 55011 Emissions; Group 1, Class A
- CE, C-Tick, ICES, and FCC Part 15 Emissions; Class A

Note: For EMC compliance, operate this device according to product documentation.

CE Compliance

This product meets the essential requirements of applicable European Directives, as amended for CE marking, as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2004/108/EC; Electromagnetic Compatibility Directive (EMC)

Note: Refer to the Declaration of Conformity (DoC) for this product for any additional regulatory compliance information. To obtain the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Waste Electrical and Electronic Equipment (WEEE)

EU Customers: At the end of their life cycle, all products must be sent to a WEEE recycling center. For more information about WEEE recycling centers and National Instruments WEEE initiatives, visit ni.com/environment/weee.htm.

NI Services and Support



NI has the services and support to meet your needs around the globe and through the application life cycle – from planning and development through deployment and ongoing maintenance. We offer services and service levels to meet customer requirements in research, design, validation, and manufacturing. Visit ni.com/services.

Training and Certification

NI training is the fastest, most certain route to productivity with our products. NI training can shorten your learning curve, save development time, and reduce maintenance costs over the application life cycle. We schedule instructor-led courses in cities worldwide, or we can hold a course at your facility. We also offer a professional certification program that identifies individuals who have high levels of skill and knowledge on using NI products. Visit ni.com/training.

Professional Services

Our NI Professional Services team is composed of NI applications and systems engineers and a worldwide National Instruments Alliance Partner program of more than 600 independent consultants and

integrators. Services range from start-up assistance to turnkey system integration. Visit ni.com/alliance.



OEM Support

We offer design-in consulting and product integration assistance if you want to use our products for OEM applications. For information about special pricing and services for OEM customers, visit ni.com/oem.

Local Sales and Technical Support

In offices worldwide, our staff is local to the country, giving you access to engineers who speak your language. NI delivers industry-leading technical support through online knowledge bases, our applications engineers, and access to 14,000 measurement and automation professionals within NI Developer Exchange forums. Find immediate answers to your questions at ni.com/support.

We also offer service programs that provide automatic upgrades to your application development environment and higher levels of technical support. Visit ni.com/ssp.

Hardware Services

NI Factory Installation Services

NI Factory Installation Services (FIS) is the fastest and easiest way to use your PXI or PXI/SCXI combination systems right out of the box. Trained NI technicians install the software and hardware and configure the system to your specifications. NI extends the standard warranty by one year on hardware components (controllers, chassis, modules) purchased with FIS. To use FIS, simply configure your system online with ni.com/pxiadvisor.

Calibration Services

NI recognizes the need to maintain properly calibrated devices for high-accuracy measurements. We provide manual calibration procedures, services to recalibrate your products, and automated calibration software specifically designed for use by metrology laboratories. Visit ni.com/calibration.

Repair and Extended Warranty

NI provides complete repair services for our products. Express repair and advance replacement services are also available. We offer extended warranties to help you meet project life-cycle requirements. Visit ni.com/services.



ni.com • 800 813 3693

National Instruments • info@ni.com



© 2008 National Instruments. All rights reserved. FieldPoint, National Instruments, National Instruments Alliance Partner, NI, ni.com, NI Developer Suite, and SCXI are trademarks of National Instruments. Other product and company names listed are trademarks or trade names of their respective companies. A National Instruments Alliance Partner is a business entity independent from NI and has no agency, partnership, or joint-venture relationship with NI.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisanTG.com



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com