



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

32-Channel (2-Wire), 300 V Multiplexer Switches

NI PXI-2527, NI PXIe-2527 **NEW!**

- 64x1 1-wire, 32x1 2-wire, or 16x1 4-wire multiplexer
- Maximum switch capacity
 - Up to 300 VDC/300 VAC, CAT I
 - Up to 2 A switching/2 A carry
 - Up to 60 W or 62.5 VA
- Onboard relay counting
- 140 cycles/s
- Fully software programmable
- Deterministic operation with hardware triggers
- 32,000-step scan list
- Available in both PXI and PXI Express versions for optimal slot placement

Operating Systems

- Windows XP/2000/NT

Recommended Software

- LabVIEW
- LabWindows™/CVI
- Measurement Studio for Visual C++
- NI Switch Executive

Other Compatible Software

- Visual Basic
- ANSI C/C++

Driver/Measurement Services Software (included)

- NI-SWITCH
- NI-DAQmx

Compliance

- UL
- CE



Overview and Applications

The NI PXI-2527 and PXIe-2527 are high-voltage multiplexer switch modules designed for medium- to high-density automated test systems. With a switching capacity of up to 300 VDC/300 VAC and up to 2 A, an NI 2527 acts as an effective front end for NI 4070 and NI 4072 digital multimeters (DMMs), offering simple channel expansion for voltage, current, resistance, capacitance, or inductance measurements. NI provides multiple-channel configurations including 64x1 one-wire, 32x1 two-wire, and 16x1 four-wire. Each channel, using robust electromechanical relays, is capable of scanning up to 140 channels/s. A cold-junction compensation (CJC) sensor is also included in the front-mounting terminal block to assist in thermocouple scanning applications.

Automatic Scanning

NI 2527 switches are able to maximize throughput in automated test applications with the use of scanning. Scanning improves throughput by downloading a list of up to 32,000 connections to the switches and cycling through the list using an event (trigger) without any interruption from the host processor. You can most efficiently implement scanning by mating an NI 2527 with an instrument such as an NI 407x FlexDMM, which issues a trigger after each measurement.

Relay Count Tracking

These switch modules count relay closures on each of their relays. Relay counts are incremented each time a relay is actuated. You can retrieve the counts, stored on board the modules, programmatically and use them for predictive maintenance to reduce unexpected system downtime.

Simplified Signal Connectivity

Make signal connections for the NI 2527 modules in the TB-2627 front-mounting screw-terminal block. Additionally, to simplify connectivity with a DMM, use the HV6-BAN4 cable, which connects the banana jack inputs of a DMM to the COMs of each multiplexer bank.

Software

All National Instruments PXI switch modules are shipped with NI-SWITCH, an IVI-compliant driver that offers complete functionality for all switch modules. For additional assistance in configuring, programming, and managing higher-channel-count switching systems, NI Switch Executive software provides an easy-to-use, intelligent switch management and visual routing environment. Use the NI-SWITCH soft front panel for simple relay operations or debugging switch code/execution.



32-Channel (2-Wire), 300 V Multiplexer Switches

Ordering Information

NI PXI-2527 778572-27

NI PXIe-2527 780587-27

Includes NI-SWITCH driver software.

Accessories

TB-2627 terminal block 779358-01

HV6-BAN4 DMM connectivity cable 192795-0R2

NI Switch Executive

Development system..... 778546-01

Deployment engine 778548-00

BUY NOW

For complete product specifications, pricing, and accessory information, call 800 813 3693 (U.S.) or go to ni.com/switches.

Safety Compliance

- IEC 61010-1, EN 61010-1
- UL 61010-01, CSA 61010-1

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326 (IEC 61326): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions

Note: For EMC compliance, operate this product according to the documentation.

CE Compliance

This product meets the essential requirements of applicable European Directives as follows:

- 2006/95/EC; Low-Voltage Directive (safety)

2004/108/EC; Electromagnetic Compatibility Directive (EMC)

32-Channel (2-Wire), 300 V Multiplexer Switches

Specifications

Specifications subject to change without notice. Visit ni.com/manuals for the latest full specifications.

Input Characteristics

Maximum switching voltage

Channel-to-ground	300 V, CAT I
Channel-to-channel	300 V
Maximum switching/carry current ...	2 A

Maximum switching power

AC systems	60 W, 62.5 VA
DC systems	Refer to Figure 1

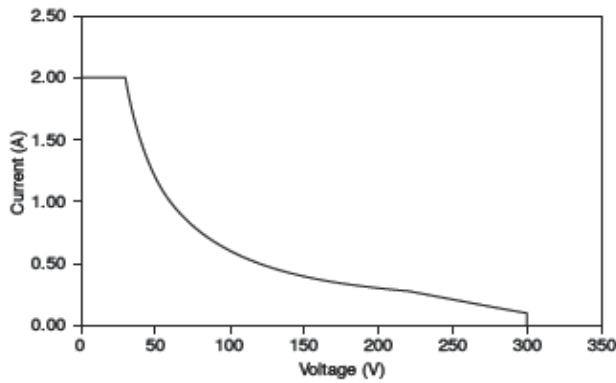


Figure 1. Maximum Switching Power for DC Loads (per channel).

Typical DC path resistance

Initial	<1½
End of life	>2½

Differential thermal EMF

Typical	2.5 µV
Maximum	<12 µV

Bandwidth (-3 dB)

1-wire	>30 MHz
2-wire	>25 MHz

Dynamic Characteristics

Maximum speed	140 cycles/s
Relay operate time	
Typical	1 ms
Maximum	3.4 ms
Expected relay life	
Mechanical	1x10 ⁸ cycles
Electrical	
<30 mV, <10 mA, resistive	2.5x10 ⁶ cycles
30 VDC, 2 ADC, resistive	1x10 ⁵ cycles
300 VDC, 60 mADC, resistive	5x10 ⁵ cycles

Physical

Relay types	Electromechanical, latching
Contact material	Palladium-ruthenium, gold-covered
I/O connectors	100 POS HDI right-angle, male
Dimensions	2 by 10 by 17.4 cm (0.8 by 3.9 by 6.9 in.) single-slot, 3U

Environment

Operating temperature	0 to 55 °C
Note: If you are using an NI 2527 with an NI PXI-101x or the NI PXI-1000B chassis, operating temperature for the NI 2527 modules is 0 to 45 °C.	
Storage temperature	-20 to 70 °C
Relative humidity	5 to 85% noncondensing
Pollution degree	2
Indoor use only.	

NI Services and Support



NI has the services and support to meet your needs around the globe and through the application life cycle – from planning and development through deployment and ongoing maintenance. We offer services and service levels to meet customer requirements in research, design, validation, and manufacturing.

Visit ni.com/services.

Training and Certification

NI training is the fastest, most certain route to productivity with our products. NI training can shorten your learning curve, save development time, and reduce maintenance costs over the application life cycle. We schedule instructor-led courses in cities worldwide, or we can hold a course at your facility. We also offer a professional certification program that identifies individuals who have high levels of skill and knowledge on using NI products.

Visit ni.com/training.

Professional Services

Our NI Professional Services team is composed of NI applications and systems engineers and a worldwide National Instruments Alliance Partner program of more than 600 independent consultants and integrators. Services range from



start-up assistance to turnkey system integration. Visit ni.com/alliance.

OEM Support

We offer design-in consulting and product integration assistance if you want to use our products for OEM applications. For information about special pricing and services for OEM customers, visit ni.com/oem.



ni.com ■ 800 813 3693

National Instruments ■ info@ni.com

Local Sales and Technical Support

In offices worldwide, our staff is local to the country, giving you access to engineers who speak your language. NI delivers industry-leading technical support through online knowledge bases, our applications engineers, and access to 14,000 measurement and automation professionals within NI Developer Exchange forums. Find immediate answers to your questions at ni.com/support.

We also offer service programs that provide automatic upgrades to your application development environment and higher levels of technical support. Visit ni.com/ssp.

Hardware Services

System Assurance Programs

NI system assurance programs are designed to make it even easier for you to own an NI system. These programs include configuration and deployment services for your NI PXI, CompactRIO, or Compact FieldPoint system. The NI Basic System Assurance Program provides a simple integration test and ensures that your system is delivered completely assembled in one box. When you configure your system with the NI Standard System Assurance Program, you can select from available NI system driver sets and application development environments to create customized, reorderable software configurations. Your system arrives fully assembled and tested in one box with your software preinstalled. When you order your system with the standard program, you also receive system-specific documentation including a bill of materials, an integration test report, a recommended maintenance plan, and frequently asked question documents. Finally, the standard program reduces the total cost of owning an NI system by providing three years of warranty coverage and calibration service. Use the online product advisors at ni.com/advisor to find a system assurance program to meet your needs.

Calibration Services

NI recognizes the need to maintain properly calibrated devices for high-accuracy measurements. We provide manual calibration procedures, services to recalibrate your products, and automated calibration software specifically designed for use by metrology laboratories. Visit ni.com/calibration.

Repair and Extended Warranty

NI provides complete repair services for our products. Express repair and advance replacement services are also available. We offer extended warranties to help you meet project life-cycle requirements. Visit ni.com/services.

©2009 National Instruments. All rights reserved. CompactRIO, CVI, FieldPoint, FlexDMM, LabVIEW, Measurement Studio, National Instruments, National Instruments Alliance Partner, NI, and ni.com are trademarks of National Instruments. The mark LabWindows is used under a license from Microsoft Corporation. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other product and company names listed are trademarks or trade names of their respective companies. A National Instruments Alliance Partner is a business entity independent from National Instruments and has no agency, partnership, or joint-venture relationship with National Instruments. 2009-11120-101-D



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com