ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments PXI-4070* at our website: *Click HERE*

6½-Digit Digital Multimeters and 1.8 MS/s Isolated Digitizers

NI 4070

- 12 built-in measurement functions
- 1.8 MS/s isolated waveform acquisition
- 10- to 23-bit flexible resolution
- Built-in self-calibration
- ±300 VDC/V_{rms} isolation
- 425 V_p AC measurements

Calibration

- Gain, temperature, and offset self-calibration
- 2-year external calibration cycle

Operating Systems

- Windows Vista/XP/2000
- Linux®

Recommended Software

- LabVIEW
- LabVIEW Real-Time Module
- LabWindows™/CVI
- LabVIEW SignalExpress

Driver Software (included)

- NI-DMM
- DMM Express VI for LabVIEW
- DMM Soft Front Panel



Overview

NI 4070 FlexDMM 6½-digit digital multimeters achieve remarkable throughput rates while maintaining precision and stable measurement accuracy. With National Instruments proprietary FlexDMM technology, these DMMs provide a fully isolated, high-voltage digitizer capable of acquiring waveforms at sampling rates up to 1.8 MS/s at all voltage and current values. Using the analysis functions in NI LabVIEW software, you can analyze these waveforms in both the time and frequency domains. NI 4070 DMMs have superior speed, accuracy, and functionality, making them an excellent fit for use in automated tests on both the production floor and in an R&D environment.

Digits	Resolution (Bits)	Max Sampling Rate DC Voltage and Current[1]	Reading Rate[2]
7	23	5 S/s	5 S/s
6½	22	100 S/s	100 S/s
5½	18	5 kS/s	3 kS/s
4½	15	20 kS/s	10 kS/s
3	10	1.8 MS/s	–

[1]Maximum sample rate refers to waveform acquisition.
[2]Auto Zero disabled, except 7 digits, measured on a 10 V and 10 kΩ range.

Table 1. NI 4070 Key Specifications

High-Speed Digital Multimeter

1.8 MS/s Flexible-Resolution Isolated Digitizer

- You can vary the resolution of the FlexDMM from 10 to 23 bits by simply changing the sampling rate, as reflected in Figure 1.
- The unique multi-instrument functionality minimizes overall system cost by eliminating the need to purchase a separate data acquisition device, signal conditioning, fixturing, and so on.

Built-In Self-Calibration and 2-Year Calibration Cycle

- Self-calibration (Self-Cal) improves accuracy by removing errors due to temperature variation and long-term drift.
- Self-Cal ensures accuracy over entire 0 to 55 °C operating range.
- 2-year external calibration cycle reduces downtime and maintenance costs.

Software

- NI-DMM is an IVI-compliant driver that accesses the complete functionality of the DMM through an easy-to-use application programming interface (API).
- Compatible languages include ANSI C/C++, .NET, Visual Basic, LabVIEW, and LabWindows/CVI.

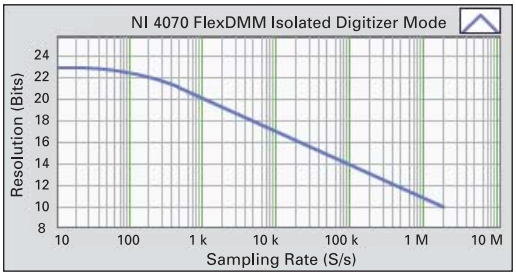


Figure 1. NI 4070 FlexDMM Resolution versus Sample Rate

Ordering Information

NI PCI-4070 778275-01
NI PXI-4070 778274-01
Includes the P-1 Probe Set, NI-DMM, DMM Express VI, and DMM Soft Front Panel.

Recommended Switching and Accessories

NI PXI-2527
300 V multiplexer switch 778572-27
NI PXI-2530
128x1 multiplexer switch 778660-01
P-1 Probe Set (standard probe) 761000-01
P-2 Probe Set (additional probe) 184698-01
P-3 Probe Set (banana plug to bare wire) 185692-01
10 A current shunt, CSM-10A 777488-02

BUY NOW!

For complete product specifications, pricing, and accessory information, call 800 813 3693 (U.S.) or go to **ni.com/dmm.**

NATIONAL INSTRUMENTS™

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

Specifications subject to change without notice.
For the most current and complete specifications, visit **ni.com/modularinstruments**.

DC Functions

DC Voltage ±(ppm of reading + ppm of range)

Range	Resolution	Input Resistance	24-Hour T_{cal} ±1 °C	90-Day T_{cal} ±5 °C	2-Year T_{cal} ±5 °C	Tempco/°C Without Self-Cal	Tempco/°C With Self-Cal
100 mV	100 nV	>10 GΩ,10 MΩ	10 + 10	30 + 20	40 + 20	4 + 5	0.3 + 0.3
1 V	1 µV	>10 GΩ,10 MΩ	6 + 2	20 + 6	25 + 6	2 + 1	0.3 + 0.3
10 V	10 µV	>10 GΩ,10 MΩ	4 + 2	20 + 6	25 + 6	1 + 1	0.3 + 0.3
100 V	100 µV	10 MΩ	6 + 2	30 + 6	35 + 6	4 + 1	0.3 + 0.3
300 V	1 mV	10 MΩ	6 + 6	30 + 20	35 + 20	4 + 3	0.3 + 0.3

DC Current ±(ppm of reading + ppm of range)

Range	Resolution	Burden Voltage (typical)	Noise (ppm of range rms)	2-Year	Tempco/°C
20 mA	10 nA	<20 mV	20	400 + 150	8 + 1
200 mA	100 nA	<200 mV	3	400 + 20	8 + 0.2
1 A	1 µA	<800 mV	3	500 + 50	8 + 0.4

Resistance (4- and 2-wire) ±(ppm of reading + ppm of range)

Range	Resolution	Test Current	Max Test Voltage	24-Hour T_{cal} ±1 °C	90-Day T_{cal} ±5 °C	2-Year T_{cal} ±5 °C	Tempco/°C Without Self-Cal	Tempco/°C With Self-Cal
100 Ω	100 µΩ	1 mA	100 mV	15 + 10	50 + 10	80 + 10	8 + 1	0.8 + 1
1 kΩ	1 mΩ	1 mA	1 V	12 + 2	50 + 3	80 + 3	8 + 0.1	0.8 + 0.1
10 kΩ	10 mΩ	100 µA	1 V	12 + 2	50 + 3	80 + 3	8 + 0.1	0.8 + 0.1
100 kΩ	100 mΩ	10 µA	1 V	15 + 2	50 + 6	80 + 6	8 + 0.5	0.8 + 0.5
1 MΩ	1 Ω	10 µA	10 V	20 + 2	60 + 10	90 + 10	8 + 1	0.8 + 1
10 MΩ	10 Ω	1 µA	10 V	100 + 2	200 + 10	400 + 10	30 + 3	30 + 3
100 MΩ	100 Ω	1 µA II 10 M Ω	10 V	900 + 20	1,800 + 40	2,000 + 40	200 + 10	200 + 10

Diode Test

Range	Resolution	Test Current	Accuracy
10 V	10 µV	1 µA, 10 µA, 100 µA, 1 mA	Add 20 ppm of reading to 10 VDC voltage specifications.

AC Functions

Digits	Reading Rate	Bandwidth
6½	0.25 S/s	1 Hz to 300 kHz
6½	2.5 S/s	10 Hz to 300 kHz
6½	25 S/s	100 Hz to 300 kHz
6½	100 S/s	400 Hz to 300 kHz
5½	1.0 kS/s	20 to 300 kHz

AC Voltage 2-Year ±(% of reading + % of range), 23 °C ±5 °C

Range (rms)	Peak Voltage	Resolution	1 to 40 Hz	40 Hz to 20 kHz	20 to 50 kHz	50 to 100 kHz	100 to 300 kHz
50 mV	±105 mV	100 nV	0.1 + 0.04	0.05 + 0.04	0.09 + 0.04	0.5 + 0.08	3 + 0.1
500 mV	±1.05 V	1 µV	0.1 + 0.01	0.05 + 0.02	0. 09 + 0.02	0.5 ± 0.02	3 + 0.05
5 V	±10.5 V	10 µV					
50 V	±105 V	100 µV					
300 V	±450 V	1 mV					
Tempco/°C			0.001 + 0.001	0.001 + 0.001	0.001 + 0.001	0.001 + 0.001	0.01 + 0.01

BUY ONLINE at **ni.com** or **CALL 800 813 3693 (U.S.)**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

AC Current 2-Year ±(% of reading + % of range)

Range (rms)	Peak Current	Resolution	Burden Voltage (rms)	1 Hz to 20 kHz	Tempco/°C
10 mA	±20 mA	10 nA	<10 mV	0.04 + 0.02	0.001 + 0.0001
100 mA	±200 mA	100 nA	<100 mV	0.04 + 0.02	0.001 + 0.0001
1 A	±2 A	1 µA	<800 mV	0.1 + 0.02	0.001 + 0.0001

Frequency and Period

Input Range	Frequency Range	Period Range	Resolution	2-Year Accuracy % of Reading
50 mV to 300 V	1 Hz to 500 kHz	1 s to 2 µs	6½ digits	0.01

Isolated Digitizer Mode

Acquisition System

Available sample rates ..... $\frac{1.8\ \text{MS/s}}{n}$, where n = 1, 2, 3,…1.8 x 10^5
Variable resolution ..... 10 to 23 bits
Available functions ..... Voltage and current
Voltage ranges ..... ±100 mV to ±300 V (DC or AC coupled)
Current ranges ..... 20 mA to 1 A

DC Voltage ±(ppm of reading + ppm of range)

Range	Input Impedance	Flatness Error (20 kHz)	Bandwidth (-3 dB)	THD 1 kHz Signal (-1 dBFS)	THD 1 kHz Signal (-1 dBFS)
100 mV	>10 GΩ,1 MΩ	-0.03 dB	300 kHz	-104 dB	-78 dB
1 V	>10 GΩ,1 MΩ	-0.03 dB	300 kHz	-109 dB	-83 dB
10 V	>10 GΩ,1 MΩ	-0.03 dB	300 kHz	-96 dB	-70 dB
100 V	1 MΩ	-0.03 dB	300 kHz	-96 dB	-70 dB
300 V	1 MΩ	-0.03 dB	300 kHz	-98 dB	-72 dB

DC Current ±(ppm of reading + ppm of range)

Range	Resolution	Burden Voltage (typical)	Flatness Error (20 kHz)	Bandwidth (-3 dB)
20 mA	10 nA	<20 mV	±0.01 dB	430 kHz
200 mA	100 nA	<200 mV	±0.01 dB	430 kHz
1 A	1 µA	<800 mV	±0.01 dB	400 kHz

Certifications and Compliance

Safety

IEC 61010-1; EN 61010-1; UL 61010-1; CSA 61010-1
Installation category II
Pollution degree 2

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326 (IEC 61326): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

NI Services and Support



NI has the services and support to meet your needs around the globe and through the application life cycle – from planning and development through deployment and ongoing maintenance. We offer services and service levels to meet customer requirements in research, design, validation, and manufacturing. Visit **ni.com/services**.

Training and Certification

NI training is the fastest, most certain route to productivity with our products. NI training can shorten your learning curve, save development time, and reduce maintenance costs over the application life cycle. We schedule instructor-led courses in cities worldwide, or we can hold a course at your facility. We also offer a professional certification program that identifies individuals who have high levels of skill and knowledge on using NI products. Visit **ni.com/training**.

Professional Services

Our NI Professional Services team is composed of NI applications and systems engineers and a worldwide National Instruments Alliance Partner program of more than 600 independent consultants and integrators. Services range from start-up assistance to turnkey system integration. Visit **ni.com/alliance**.

NATIONAL INSTRUMENTS™
Certified Alliance Partner

OEM Support

We offer design-in consulting and product integration assistance if you want to use our products for OEM applications. For information about special pricing and services for OEM customers, visit **ni.com/oem**.

Local Sales and Technical Support

In offices worldwide, our staff is local to the country, giving you access to engineers who speak your language. NI delivers industry-leading technical support through online knowledge bases, our applications engineers, and access to 14,000 measurement and automation professionals within NI Developer Exchange forums. Find immediate answers to your questions at **ni.com/support**.

We also offer service programs that provide automatic upgrades to your application development environment and higher levels of technical support. Visit **ni.com/ssp**.

Hardware Services

System Assurance Programs

NI system assurance programs are designed to make it even easier for you to own an NI system. These programs include configuration and deployment services for your NI PXI, CompactRIO, or Compact FieldPoint system. The NI Basic System Assurance Program provides a simple integration test and ensures that your system is delivered completely assembled in one box. When you configure your system with the NI Standard System Assurance Program, you can select from available NI system driver sets and application development environments to create customized, reorderable software configurations. Your system arrives fully assembled and tested in one box with your software preinstalled. When you order your system with the standard program, you also receive system-specific documentation including a bill of materials, an integration test report, a recommended maintenance plan, and frequently asked question documents. Finally, the standard program reduces the total cost of owning an NI system by providing three years of warranty coverage and calibration service. Use the online product advisors at **ni.com/advisor** to find a system assurance program to meet your needs.

Calibration Services

NI recognizes the need to maintain properly calibrated devices for high-accuracy measurements. We provide manual calibration procedures, services to recalibrate your products, and automated calibration software specifically designed for use by metrology laboratories. Visit **ni.com/calibration**.

Repair and Extended Warranty

NI provides complete repair services for our products. Express repair and advance replacement services are also available. We offer extended warranties to help you meet project life-cycle requirements. Visit **ni.com/services**.

NATIONAL INSTRUMENTS™

ni.com • 800 813 3693
National Instruments • info@ni.com

©2009 National Instruments. All rights reserved. CompactRIO, CVI, FieldPoint, FlexDMM, LabVIEW, National Instruments, National Instruments Alliance Partner, NI, ni.com, and SignalExpress are trademarks of National Instruments. The mark LabWindows is used under a license from Microsoft Corporation. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries. Other product and company names listed are trademarks or trade names of their respective companies. A National Instruments Alliance Partner is a business entity independent from National Instruments and has no agency, partnership, or joint-venture relationship with National Instruments.
2009-10828-101-D

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP