

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments PXI-6070 / PXI-6070E* at our website: ***Click HERE***

Full-Featured E Series Multifunction DAQ
12 or 16-Bit, up to 1.25 MS/s, up to 64 Analog Inputs

E Series – Full-Featured

- 16 or 64 analog inputs at up to 1.25 MS/s, 12 or 16-bit resolution
- 2 analog outputs at up to 1 MS/s, 12 or 16-bit resolution
- 8 digital I/O lines (TTL/CMOS); two 24-bit counter/timers
- Analog and digital triggering
- 14 or 15 analog input signal ranges
- NI-DAQ driver simplifies configuration and measurements

Families
- NI 6071E
- NI 6070E
- NI 6062E
- NI 6052E
- NI 6040E
- NI 6033E
- NI 6032E
- NI 6031E
- NI 6030E
- NI 6020E (only digital triggering)

Operating Systems
- Windows 2000/NT/XP
- Real-time performance with LabVIEW (page 134)
- Others such as Linux and Mac OS X (page 187)

Recommended Software
- LabVIEW
- LabWindows/CVI
- Measurement Studio
- VI Logger

Other Compatible Software
- Visual Basic, C/C++, and C#

Driver Software (included)
- NI-DAQ 7

Calibration Certificate Included
See page 21.



Family	Bus	Analog Inputs	Input Resolution	Max Sampling Rate	Input Range	Analog Outputs	Output Resolution	Output Rate	Output Range	Digital I/O	Counter/Timers	Triggers
NI 6071E	PCI, PXI	64 SE/32 DI	12 bits	1.25 MS/s	±0.05 to ±10 V	2	12 bits	1 MS/s	±10 V	8	2, 24-bit	Analog, digital
NI 6070E	PCI, PXI, FireWire	16 SE/8 DI	12 bits	1.25 MS/s	±0.05 to ±10 V	2	12 bits	1 MS/s	±10 V	8	2, 24-bit	Analog, digital
NI 6062E	PCMCIA	16 SE/8 DI	12 bits	500 kS/s	±0.05 to ±10 V	2	12 bits	850 kS/s	±10 V	8	2, 24-bit	Analog, digital
NI 6052E	PCI, PXI, FireWire	16 SE/8 DI	16 bits	333 kS/s	±0.05 to ±10 V	2	16 bits	333 kS/s	±10 V	8	2, 24-bit	Analog, digital
NI 6040E	PCI, PXI	16 SE/8 DI	12 bits	500 kS/s	±0.05 to ±10 V	2	12 bits	1 MS/s	±10 V	8	2, 24-bit	Analog, digital
NI 6033E	PCI	64 SE/32 DI	16 bits	100 kS/s	±0.1 to ±10 V	0	-	-	-	8	2, 24-bit	Analog, digital
NI 6032E	PCI	16 SE/8 DI	16 bits	100 kS/s	±0.1 to ±10 V	0	-	-	-	8	2, 24-bit	Analog, digital
NI 6031E	PCI, PXI	64 SE/32 DI	16 bits	100 kS/s	±0.1 to ±10 V	2	16 bits	100 kS/s	±10 V	8	2, 24-bit	Analog, digital
NI 6030E	PCI, PXI	16 SE/8 DI	16 bits	100 kS/s	±0.1 to ±10 V	2	16 bits	100 kS/s	±10 V	8	2, 24-bit	Analog, digital
NI 6020E	NI USB	16 SE/8 DI	12 bits	100 kS/s	±0.05 to ±10 V	2	12 bits	20 S/s	±10 V	8	2, 24-bit	Digital

Table 1. NI Full-Featured E Series Model Guide (See page 228 for detailed specifications.)

Overview and Applications

NI Full-Featured E Series devices are the fastest and the most accurate multiplexed data acquisition devices available. They are ideal for applications ranging from continuous high-speed data logging to control applications to high voltage signal or sensor measurements when used with NI signal conditioning. Synchronize the operations of multiple devices using the RTSI bus or PXI trigger bus and easily integrate other hardware such as motion control and machine vision to create an entire measurement and control system.

Visit ni.com/oem for information on our quantity discounts for OEM customers.

Highly Accurate Hardware Design

NI Full-Featured E Series DAQ devices includethe following features and technologies:

Temperature Drift Protection Circuitry – Designed with components that minimize the effect of temperature changes on measurements to less than 0.0006% of reading per °C.

Resolution-Improvement Technologies – Carefully designed noise floor maximizes resolution.

Onboard Self-Calibration – Precise voltage reference included for calibration and measurement accuracy. Self-calibration is completely software controlled, with no potentiometers to adjust.

NI DAQ-STC – Timing and control ASIC designed to provide more flexibility, lower power consumption, and a higher immunity to noise and jitter than off-the-shelf counter/timer chips.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Full-Featured E Series Multifunction DAQ 12 or 16-Bit, up to 1.25 MS/s, up to 64 Analog Inputs

NI MITE – ASIC designed to optimize data transfer for multiple simultaneous operations using bus mastering with three scatter-gather DMA channels for maximum performance of concurrent I/O operations.

NI PGIA – Measurement and instrument class amplifier that guarantees settling times at all gains. Typical commercial off-the-shelf amplifier components do not meet the settling time requirements for high-gain measurement applications.

PFI Lines – Eight programmable function input (PFI) lines that can be used for software-controlled routing of interboard and intraboard digital and timing signals.

RTSI or PXI Trigger Bus – Used to share timing and control signals between devices and synchronize operations.

RSE Mode – In addition to differential and nonreferenced single-ended modes, NI full-featured E Series devices offer referenced single-ended (RSE) mode for use with floating signal sources in applications with channel counts higher than eight.

Onboard Temperature Sensor – Included for monitoring the operating temperature of the device to ensure that it is operating within the specified range.

Analog and Digital Triggering – Only full-featured E Series devices provide the ability to set a trigger based on the level of an analog signal, in addition to the ability to trigger off an edge of a digital signal.

More Input Ranges – Up to 15 input ranges for optimal resolution, even for signals smaller than 50 mV.

High-Performance, Easy-to-Use Driver Software

NI-DAQ is the robust driver software that makes it easy to access the functionality of your data acquisition hardware, whether you are a beginning or advanced user. Helpful features include:

Automatic Code Generation – DAQ Assistant is an interactive guide that steps you through configuring, testing, and programming measurement tasks, and generating the necessary code automatically for use in LabVIEW, LabWindows/CVI, or Measurement Studio.

Cleaner Code Development – Basic and advanced software functions have been combined into one easy-to-use yet powerful set to help you build cleaner code and move from basic to advanced applications without replacing functions.

High-Performance Driver Engine – Software-timed single-point input (typically used in control loops) with NI-DAQ achieves rates of up to 50 kHz. NI-DAQ also delivers maximum I/O system throughput with a multithreaded driver.

Test Panels – With NI-DAQ, you can test all of your device functionality before you begin development.

Scaled Channels – Easily scale your voltage data into the proper engineering units using the NI-DAQ Measurement Ready virtual channels by choosing from a list of common sensors and signals or creating your own custom scale.

LabVIEW Integration – All NI-DAQ functions use the waveform data type, which carries acquired data and timing information directly into more than 400 LabVIEW built-in analysis routines for display of results in engineering units on a graph.

Worldwide Support and Services

NI provides you with a wealth of resources to help you get your application up and running more quickly, including:

Technical Support – Purchase of NI hardware or software gives you access to application engineers all over the world as well as Web resources with more than 3,000 measurement examples and more than 9,000 KnowledgeBase entries. – ***ni.com/support***

NI Factory Installation Services (FIS) – Software and hardware installed in PXI and PXI/SCXI systems, tested and ready to use – ***ni.com/advisor***

Calibration – Includes NIST-traceable basic calibration certificates, services for ANSI/NCSL-Z540 and periodic calibration – ***ni.com/calibration***

Extended Warranty – Meet project life-cycle requirements and maintain optimal performance in a cost-effective way – ***ni.com/services***

Data Acquisition Training – Instructor-led courses – ***ni.com/training***

Professional Services – Feasibility, consulting, and integration through our Alliance Partners – ***ni.com/alliance***

For more information on NI services and support, please visit ni.com/services

For information on device support in NI-DAQ 7, visit ni.com/dataacquisition

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Full-Featured E Series Multifunction DAQ
12 or 16-Bit, up to 1.25 MS/s, up to 64 Analog Inputs

		Full-Featured E Series				Low-Cost E Series		Basic
Models		NI 6030E, NI 6031E, NI 6032E, NI 6033E	NI 6052E	NI 6070E, NI 6071E	NI 6040E	NI 6034E, NI 6036E	NI 6023E, NI 6024E, NI 6025E	PCI-6013, PCI-6014
Measurement Sensitivity* (mV)		0.0023	0.0025	0.009	0.008	0.0036	0.008	0.004
Nominal Range (V)								
Positive FS	**Negative FS**	**Absolute Accuracy (mV)**						
10	-10	1.147	4.747	14.369	15.373	7.56	16.504	8.984
5	-5	2.077	0.876	5.193	5.697	1.79	5.263	2.003
2.5	-2.5	–	1.190	3.605	3.859	–	–	–
2	-2	0.836	–	–	–	–	–	–
1	-1	0.422	0.479	1.452	1.556	–	–	–
0.5	-0.5	0.215	0.243	0.735	0.789	0.399	0.846	0.471
0.25	-0.25	–	0.137	0.379	0.405	–	–	–
0.2	-0.2	0.102	–	–	–	–	–	–
0.1	-0.1	0.061	0.064	0.163	0.176	–	–	–
0.05	-0.05	–	0.035	0.091	0.100	0.0611	0.106	0.069
10	0	0.976	1.232	6.765	7.269	–	–	–
5	0	1.992	2.119	5.391	5.645	–	–	–
2	0	0.802	0.850	2.167	2.271	–	–	–
1	0	0.405	0.428	1.092	1.146	–	–	–
0.5	0	0.207	0.242	0.558	0.583	–	–	–
0.2	0	0.098	0.111	0.235	0.247	–	–	–
0.1	0	0.059	0.059	0.127	0.135	–	–	–

Note: Accuracies are valid for measurements following an internal calibration. Measurement accuracies are listed for operational temperatures within ±1 °C of internal calibration temperature and ±10 °C of external or factory-calibration temperature. One-year calibration interval recommended. The Absolute Accuracy at Full Scale calculations were performed for a maximum range input voltage (for example, 10 V for the ±10 V range) after one year, assuming 100 pt averaging of data.*Smallest detectable voltage change in the input signal at the smallest input range.

Table 2. E Series Analog Input Absolute Accuracy Specifications

		Full-Featured E Series				Low-Cost E Series		Basic
Models		NI 6030E, NI 6031E, NI 6032E, NI 6033E	NI 6052E	NI 6070E, NI 6071E	NI 6040E	PCI-6036E	PCI-6024E, NI 6025E,	NI 6013, NI 6014
Nominal Range (V)								
Positive FS	**Negative FS**	**Absolute Accuracy (mV)**						
10	-10	1.43	1.405	8.127	8.127	2.417	8.127	3.835
10	0	1.201	1.176	5.685	5.685	–	–	–

Table 3. E Series Analog Output Absolute Accuracy Specifications

Recommended Accessories

Signal conditioning is required for sensor measurements or voltage inputs greater than 10 V. National Instruments SCXI is a versatile, high-performance signal conditioning platform, intended for high-channel-count applications. NI SCC products provide portable, flexible signal conditioning options on a per-channel basis. Both signal conditioning platforms are designed to increase the performance and reliability of your DAQ System, and are up to 10X more accurate than terminal blocks (please visit ***ni.com/sigcon*** for more details). Refer to the table below for more information:

Sensor/Signals (>10 V)

System Description	DAQ Device	Signal Conditioning	Page
High performance	PCI-60xxE, PXI-60xxE, DAQPad-60xxE	SCXI	270
Low-cost, portable	PCI-60xxE, PXI-60xxE, DAQPad-60xxE	SCC	251

Signals (<10 V)[1]

System Description	DAQ Device	Terminal Block	Cable	Page
Shielded	PCI-60xxE/DAQPad-60xxE	SCB-68	SH6868-EP	214
Shielded	PXI-60xxE	TB-2705	SH6868-EP	214
Shielded	PCI-6071E/PCI-6033E/PCI-6031E	SCB-100	SH100100	214
Shielded	PXI-6071E/PXI-6031E	Two TBX-68s	SH1006868	214
Shielded	DAQPad-60xxE	SCB-68	SHC6868-EP	214
Low-Cost	PCI-60xxE/PXI-60xxE/DAQPad-60xxE	CB-68LP	R6868	214
Low-Cost	DAQCard-60xxE	CB-68LP	RC6868	214

1Terminal Blocks do not provide signal conditioning (ie. filtering, amplification, isolation, etc.), which may be necessary to increase the accuracy of your measurements.

Table 4. Recommended Accessories

Ordering Information

NI PXI-6071E 777676-01
NI PCI-6071E 777515-01
NI PXI-6070E 777060-01
NI PCI-6070E 777305-01
NI DAQPad-6070E for FireWire .....(See page 207)
NI DAQCard-6062E .....(See page 207)
NI PXI-6052E 777962-01
NI PCI-6052E 777745-01
NI DAQPad-6052E for FireWire .....(See page 207)
NI PXI-6040E 777484-01
NI PCI-6040E 777383-01
NI PCI-6033E 777516-01
NI PCI-6032E 777422-01
NI PXI-6031E 777636-01
NI PCI-6031E 777514-01
NI PXI-6030E 777555-01
NI PCI-6030E 777384-01
NI DAQPad-6020E for USB .....(See page 207)

Includes NI-DAQ driver software and calibration certificate.

For more information on warranty and value-added services, see page 20.

BUY ONLINE!
Visit ***ni.com/dataacquisition***

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Multifunction DAQ Overview

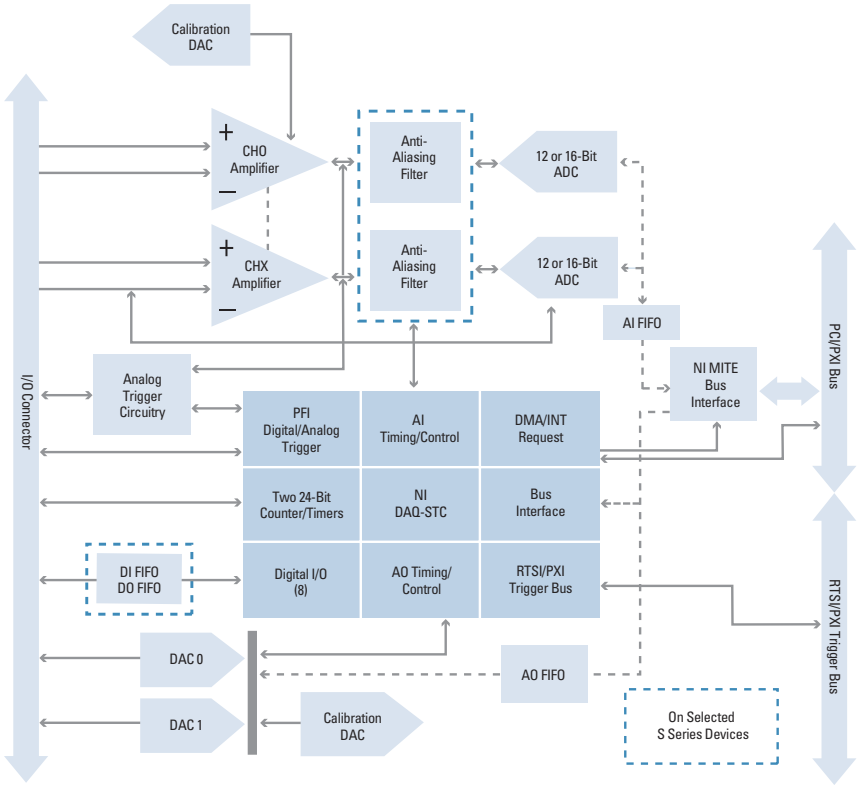


Figure 1. S Series Hardware Block Diagram

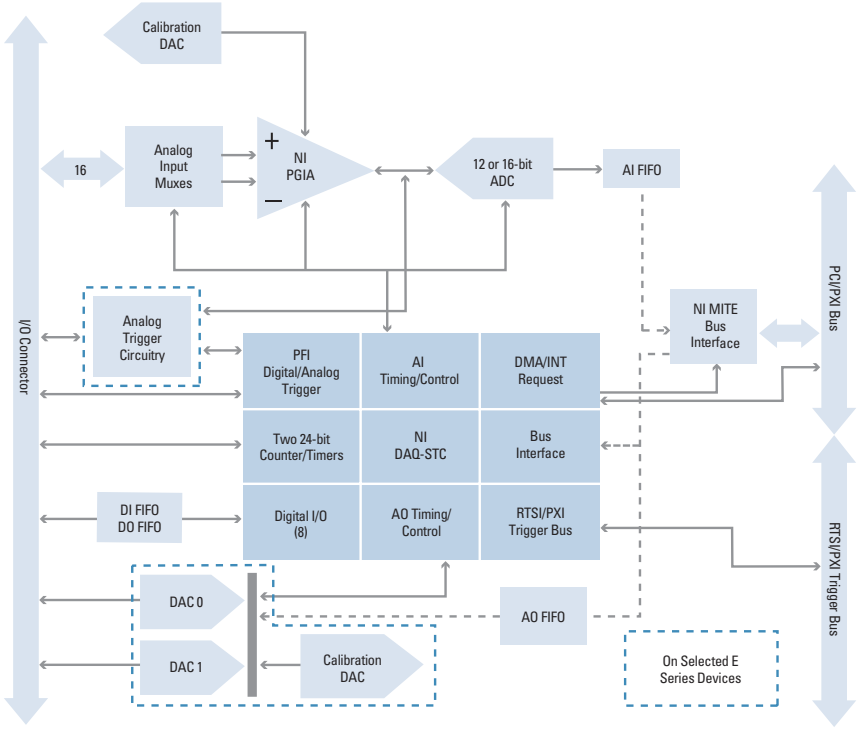


Figure 2. E Series Hardware Block Diagram

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

12-Bit E Series Multifunction DAQ Specifications

Specifications – NI 607xE, NI 6062E, NI 6040E, NI 602xE

These specifications are typical for 25 °C unless otherwise noted.

Analog Input

Accuracy specifications ..... See page 228.

Input Characteristics

	Number of Channels
6070E 6062E 6040E 602xE	16 single-ended or 8 differential (software selectable per channel)
6071E	64 single-ended or 32 differential (software selectable per channel)

Resolution..... 12 bits, 1 in 4,096

	Maximum Sampling Rate
607xE	1.25 MS/s
6062E	500 kS/s
6040E	500 kS/s single-channel scanning 250 kS/s multichannel scanning
6023E 6024E 6025E	200 kS/s
6020E	100 kS/s

Input Signal Ranges

Device	Range (Software Selectable)	Bipolar Input Range	Unipolar Input Range
607xE	20 V	±10 V	–
6062E	10 V	±5 V	0 to 10 V
6040E	5 V	±2.5 V	0 to 5 V
6020E	2 V	±1 V	0 to 2 V
	1 V	±500 mV	0 to 1 V
	500 mV	±250 mV	0 to 500 mV
	200 mV	±100 mV	0 to 200 mV
	100 mV	±50 mV	0 to 100 mV
6023E	20 V	±10 V	–
6024E	10 V	±5 V	–
6025E	1 V	±500 mV	–
	100 mV	±50 mV	–

Input coupling..... DC

Maximum working voltage
(signal + common mode)..... Input should remain within ±11 V of ground

Overvoltage Protection

Device	Powered On	Powered Off
607xE 6062E 6040E	±25 V	±15 V
6023E 6024E 6025E	±40 V	±25 V
6020E	±35 V	±25 V

Inputs Protected

6070E 6062E, 6040E 602xE	AI <0..15>, AI SENSE
6071E	AI <0..63>, AI SENSE, AI SENSE2

FIFO Buffer Size

DAQCard-6062E	8,192 samples
DAQPad-6020E	4,096 samples
DAQPad-6070E DAQCard-6024E	2,048 samples
PCI/PXI-6070E 6071E, 6040E PCI-6023E, NI 6025E, PCI-6024E	512 samples

Data transfers
- PCI, PXI, DAQPad for FireWire..... DMA, interrupts, programmed I/O
- DAQCard, DAQPad for USB..... Interrupts, programmed I/O

DMA modes
- PCI, PXI, DAQPad for FireWire..... Scatter-gather (single-transfer, demand transfer)

Configuration memory size..... 512 words

Transfer Characteristics

Relative Accuracy

Device	Typical Dithered	Maximum Undithered
607xE 6062E 6040E 6023E 6024E 6025E	±0.5 LSB	±1.5 LSB
6020E	±0.2 LSB	±1.5 LSB

DNL

Device	Typical	Maximum
607xE 6040E 6023E PCI-6024E 6025E	±0.5 LSB	±1.0 LSB
6020E	±0.2 LSB	±1.0 LSB
6062E DAQCard-6024E	±0.75 LSB	-0.9, +1.5 LSB

No missing codes..... 12 bits, guaranteed

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

12-Bit E Series Multifunction DAQ Specifications

Specifications – NI 607xE, NI 606xE, NI 6040E, NI 602xE (continued)

Amplifier Characteristics

Input Impedance

Device	Normal Powered On	Powered Off	Overload
6070E 6062E 6040E PCI-6071E PXI-6071E	100 GΩ in parallel with 100 pF	820 Ω	820 Ω
6023E, 6024E, 6025E	100 GΩ in parallel with 100 pF	4.7 kΩ	4.7 kΩ
6020E	100 GΩ in parallel with 50 pF	3 kΩ	3 kΩ

Input bias current ..... ±200 pA
Input offset current ..... ±100 pA

CMRR, DC to 60 Hz

Device	Range	CMRR (dB)
607xE	20 V	95
	10 V	100
	100 mV to 5 V	106
6040E	10 to 20 V	85
6062E	5 V	95
	100 mV to 2 V	100
6023E	10 to 20 V	85
6024E	100 mV to 1 V	90
6025E		
6020E	100 mV to 20 V	90

Dynamic Characteristics

Bandwidth

Device	Small Signal (-3 dB)	Large Signal (1% THD)
607xE	1.6 MHz	1 MHz
6062E	1.3 MHz	250 kHz
6040E	600 kHz	350 kHz
6023E	500 kHz	225 kHz
PCI-6024E		
6025E		
DAQCard-6024E	500 kHz	265 kHz
DAQPad-6020E	150 kHz	200 kHz

Settling Time to Full-Scale Step

Device	Range	Accuracy ±0.012% (±0.5 LSB)	±0.024% (±1 LSB)	±0.098% (±4 LSB)
6070E	20 V	2 µs typical	1.5 µs typical	1.5 µs typical
		3 µs maximum	2 µs maximum	2 µs maximum
	10 V	2 µs typical	1.5 µs typical	1.3 µs typical
		3 µs maximum	2 µs maximum	1.5 µs maximum
	200 mV to 5 V	2 µs typical	1.5 µs typical	0.9 µs typical
		3 µs maximum	2 µs maximum	1 µs maximum
	100 mV	2 µs typical	1.5 µs typical	1 µs typical
		3 µs maximum	2 µs maximum	1.5 µs maximum
6071E	20 V	3 µs typical	1.9 µs typical	1.9 µs typical
		5 µs max	2.5 µs maximum	2 µs maximum
	10 V	3 µs typical	1.9 µs typical	1.2 µs typical
		5 µs maximum	2.5 µs maximum	1.5 µs maximum
	200 mV to 5 V	3 µs typical	1.9 µs typical	1.2 µs typical
		5 µs maximum	2.5 µs maximum	1.3 µs maximum
	100 mV	3 µs typical	1.9 µs typical	1.2 µs typical
		5 µs maximum	2.5 µs maximum	1.5 µs maximum
6062E	All	2.5 µs typical	2.5 µs typical	2 µs typical
		4 µs maximum	3 µs maximum	2.5 µs maximum
	All	4 µs typical	4 µs maximum	4 µs maximum
		8 µs maximum		
	All	5 µs typical	5 µs maximum	5 µs maximum
	All	10 µs maximum	10 µs maximum	10 µs maximum

System Noise (LSB_{rms}, Not Including Quantization)

Device	Range	Dither Off	Dither On
6070E	1 to 20 V	0.25	0.5
6071E	500 mV	0.4	0.6
	200 mV	0.5	0.7
	100 mV	0.8	0.9
6062E	1 to 20 V	0.25	0.6
	500 mV	0.4	0.75
	200 mV	0.5	0.8
	100 mV	0.8	1.0
6040E	1 to 20 V	0.2	0.5
	500 mV	0.25	0.5
	200 mV	0.5	0.7
	100 mV	0.9	1.0
6023E	1 to 20 V	0.1	0.6
PCI-6024E, 6025E	100 mV	0.7	0.8
DAQCard-6024E	10 to 20 V	0.1	0.65
	1 V	0.45	0.65
	100 mV	0.70	0.90
6020E	1 to 20 V	0.07	0.5
	500 mV	0.12	0.5
	200 mV	0.25	0.6
	100 mV	0.5	0.7

Crosstalk, DC to 100 KHz

Device	Adjacent Channels	All Other Channels
607xE, 6062E, 6040E	-75 dB	-90 dB
602xE	-60 dB	-80 dB

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

12-Bit E Series Multifunction DAQ Specifications

Specifications – NI 607xE, NI 606xE, NI 6040E, NI 602xE (continued)

Analog Output

Output Characteristics

Number of Channels	
607xE 6062E 6040E 6020E 6024E 6025E	2 voltage outputs
6023E	None

Resolution ..... 12 bits, 1 in 4,096

Maximum update rate

Waveform Generation

	FIFO Mode		Non-FIFO Mode	
Device	Internally Timed	Externally Timed	1 Channel	2 Channels
607xE 6040E	1 MS/s	950 kS/s	800 kS/s, system dependent	400 kS/s, system dependent
6062E	850 kS/s	850 kS/s	800 kS/s, system dependent	400 kS/s, system dependent
6023E PCI-6024E 6025E	N/A	N/A	10 kS/s with DMA 1 kS/s with interrupts system dependent	10 kS/s with DMA 1 kS/s with interrupts system dependent
DAQCard-6024E	N/A	N/A	1 kS/s with interrupts system dependent	1 kS/s with interrupts system dependent
DAQPad-6020E	N/A	N/A	20 S/s, system dependent	20 S/s, system dependent

FIFO Buffer Size	
607xE, 6062E	2,048 samples
6040E	512 samples
602xE	None

Data transfers

- PCI, PXI, DAQPad for IEEE 1394 ..... DMA, interrupts, programmed I/O
- DAQCard, DAQPad for USB ..... Interrupts, programmed I/O

DMA modes

- PCI, PXI, DAQPad ..... Scatter-gather (single transfer, demand transfer)

Transfer Characteristics

Relative accuracy

- After calibration
  - 6062E, DAQCard-6024E ..... ±0.5 LSB typical, ±1.0 LSB maximum
  - All others ..... ±0.3 LSB typical, ±0.5 LSB maximum
- Before calibration ..... ±4 LSB maximum

DNL

- After calibration
  - 6062E, DAQCard-6024E ..... ±0.5 LSB typical, ±1.0 LSB maximum
  - All others ..... ±0.3 LSB typical, ±1.0 LSB maximum
- Before calibration ..... ±3 LSB maximum

Monotonicity ..... 12 bits, guaranteed after calibration

Gain error (relative to external reference)

- 6062E, 6020E ..... ±0.5% of output maximum, not adjustable
- 607xE, 6040E ..... 0 to 0.67% of output maximum, not adjustable

Voltage Output

Output coupling ..... DC

Output impedance ..... 0.1 Ω maximum

Ranges	
607xE, 6040E, 6020E	±10 V, 0 to 10 V, ±EXT REF, 0 to EXT REF; software selectable
6062E	±10 V, ±EXT REF, software selectable
6024E, 6025E	±10 V

Current drive ..... ±5 mA maximum

Protection ..... Short-circuit to ground

Power-on state ..... 0 V (±200 mV)

External Reference Input

Range ..... 11 V

Overvoltage protection

- 607xE, 6062E, 6040E ..... ±25 V powered on, ±15 V powered off
- 6020E ..... ±35 V powered on, ±25 V powered off

Input impedance ..... 10 kΩ

Bandwidth (-3 dB)

- 607xE, 6040E ..... 1 MHz
- 6062E ..... 50 kHz
- 6020E ..... 300 kHz

Dynamic Characteristics

Device	Settling Time for Full-Scale Step	Slew Rate
607xE 6062E 6040E	3 µs to ±0.5 LSB accuracy	20 V/µs
602xE	10 µs to ±0.5 LSB accuracy	10 V/µs

Device	Reglitching Disabled	Reglitching Enabled
607xE, 604xE	±20 mV	±4 mV
PCI-6024E 6025E	±42 mV	N/A
DAQCard-6024E	±13 mV	N/A
6020E	±100 mV	N/A
6062E	±80 mV	±30 mV

Glitch Duration (At Mid-Scale Transition)	
607xE 6040E	1.5 µs
6024E 6025E	2 µs
6020E 6062E	3 µs

Noise ..... 200 μV_{rms}, DC to 1 MHz

Glitch energy magnitude (at mid-scale transition)

Stability

Gain temperature coefficient (except 6024E, 6025E)

- External reference ..... ±25 ppm/°C

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

12-Bit E Series Multifunction DAQ Specifications

Specifications – NI 607xE, NI 606xE, NI 6040E, NI 602xE (continued)

Digital I/O

Number of Channels	
6025E	32 input/output
All others	8 input/output

Compatibility ..... 5 V TTL
Power-on state ..... Input; (high-impedance)
Digital logic levels
P0.<0..7>

Level	Minimum (V)	Maximum (V)
Input low voltage	0	0.8
Input high voltage	2.0	5.0
Output low voltage (I_{out} = 24 mA)	–	0.4
Output high voltage (I_{out} = -13 mA)	4.35	–

P1.<0..7>, P2.<0..7>, P3.<0..7>

Level	Minimum (V)	Maximum (V)
Input low voltage	0	0.8
Input high voltage	2.2	5.0
Output low voltage (Iout = 2.5 mA)	–	0.4
Output high voltage (Iout = -2.5 mA)	3.7	–

Data Transfers	
6025E	Interrupts, programmed I/O
All others	Programmed I/O

Transfer rate (1 word = 8 bits)
Maximum with NI-DAQ, system dependent

Transfer Rate	
DAQPad-6070E	5 kwords/s
All others	50 kwords/s

Constant sustainable rate ..... 1 to 10 kwords/s, system dependent

Timing I/O

Number of channels
Up/down counter/timers 2
Frequency scaler 1
Resolution
Up/down counter/timers ..... 24 bits
Frequency scaler ..... 4 bits
Compatibility ..... 5 V/TTL
Base clocks available
Up/down counter/timers ..... 20 MHz and 100 kHz
Frequency scaler ..... 10 MHz and 100 kHz
Base clock accuracy ..... ±0.01%
Maximum source frequency
Up/down counter/timers ..... 20 MHz
Minimum source pulse duration ..... 10 ns, edge-detect mode
Minimum gate pulse duration ..... 10 ns, edge-detect mode
Data transfers ..... DMA*, interrupts, programmed I/O

*Except DAQCard and USB DAQPad

Triggers

Analog Triggers

Number of Triggers	
607xE 6062E 6040E	1
602xE	None

Purpose
Analog input ..... Start and stop trigger, gate, clock
Analog output ..... Start trigger, gate, clock
General-purpose counter/timers ..... Source, gate
Source ..... All analog input channels, PFI 0/AI START TRIG
Level
Internal source, AI<0..15/63> ..... ±Full-scale
External source, PFI 0/AI START TRIG ..... ±10 V
Slope ..... Positive or negative; software selectable
Resolution ..... 8 bits, 1 in 256
Bandwidth (-3 dB)

Device	Internal Source	External Source
607xE	2 MHz	7 MHz
6062E	500 kHz	2.5 MHz
6040E	650 kHz	3 MHz

Hysteresis ..... Programmable

Digital Triggers (All Devices)

Purpose
Analog input ..... Start and stop trigger, gate, clock
Analog output ..... Start trigger, gate, clock
General-purpose counter/timers ..... Source, gate
Source ..... PFI <0..9>, RTSI <0..6>
Compatibility ..... 5 V/TTL
Response ..... Rising or falling edge
Pulse width ..... 10 ns minimum

External Input For Digital Or Analog Trigger (PFI0/TRIG1)

Impedance
6062E ..... 12 kΩ
607xE, 6040E ..... 10 kΩ
Coupling ..... DC
Protection
Digital trigger ..... -0.5 to V_{cc} + 0.5 V

Calibration

Recommended warm-up time ..... 15 minutes; 30 minutes for DAQCard and DAQPad
Calibration interval ..... 1 year
Onboard calibration reference
DC level ..... 5.000 V (±3.5 mV) over full operating temperature, actual value stored in EEPROM
Temperature coefficient ..... ±5 ppm/°C maximum
Long-term stability ..... ±15 ppm/$\sqrt{1000\ h}$

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

12-Bit E Series Multifunction DAQ Specifications

Specifications – NI 607xE, NI 606xE, NI 6040E, NI 602xE (continued)

RTSI Bus (PCI and FireWire only)

Trigger lines[1]
- PCI 7
- FireWire (DAQPad) 4

PXI Trigger Bus (PXI only)

Trigger lines 6
Star trigger 1

Bus Interface

PCI, PXI, FireWire (DAQPad) ..... Master, slave
USB (DAQPad) ..... Slave
PCMCIA (DAQCard) ..... Slave

Power Requirements[2]

Device	+5 VDC (±5%)*	Power Available at I/O Connector
PCI-607xE, PXI-607xE	1.1 A	+4.65 to +5.25 VDC, 1 A
6040E	1.0 A	+4.65 to +5.25 VDC, 1 A
DAQCard-6062E	340 mA typical 750 mA maximum	+4.65 to +5.25 VDC, 250 mA
DAQCard-6024E	270 mA typical 750 mA maximum	+4.65 to +5.25 VDC, 250 mA
6023E, 6025E, PCI-6024E	0.7 A	+4.65 to +5.25 VDC, 1 A

Device	Power*	Power Available at I/O Connector
DAQPad-6020E	15 W, +9 to +30 VDC	+4.65 to +5.25 VDC, 1 A
DAQPad-6070E	17 W, +9 to +25 VDC	+4.65 to +5.25 VDC, 1 A

*Excludes power consumed through I/O connector

Discharge time with BP-1 battery pack
FireWire (DAQPad) ..... 2.5 hours, typical
USB (DAQPad) ..... 3 hours, typical

Physical[2]

Dimensions (Not Including Connectors)

PCI ..... 17.5 by 10.7 cm (6.9 by 4.2 in.)
PXI ..... 16.0 by 10.0 cm (6.3 by 3.9 in.)
DAQPad (30 cm enclosure) ..... 25.4 by 30.7 by 4.3 cm (10 by 12.1 by 1.7 in.)
DAQPad (15 cm enclosure) ..... 14.6 by 21.3 by 3.8 cm (5.8 by 8.4 by 1.5 in.)
DAQCard ..... Type II PC Card

I/O Connector	
6070E 6040E 6020E 6023E PCI-6024E	68-pin male 0.050 D-type
DAQCard-6062E, DAQCard-6024E	68-pin female VHDCI
6071E 6025E	100-pin female 0.050 D-type

Environment

Operating temperature ..... 0 to 55 °C
0 to 40 °C for DAQCard-6062E and DAQCard-6024E with a maximum internal temperature of 70 °C as measured by onboard temperature sensor; case temperature should not exceed 55 °C for any DAQCard
Storage temperature ..... -20 to 70 °C
Relative humidity ..... 10 to 90%, noncondensing

Certifications and Compliances

CE Mark Compliance CE

[1]Refer to RTSI specifications for available RTSI trigger lines. RTSI not available on DAQCards.
[2]See page 134 for RT Series devices, power requirements and physical parameters.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Multifunction DAQ Cable and Accessory Selection Guides

NI Cable Design Advantages

The SH68-68-EP cable is the most commonly used E Series and S Series cable. The cable is designed to work specifically with the NI Multifunction DAQ devices to preserve signal integrity through these technologies:

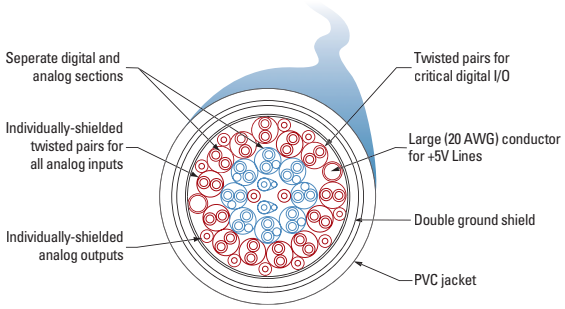


Figure 1. SH68-68-EP Cable

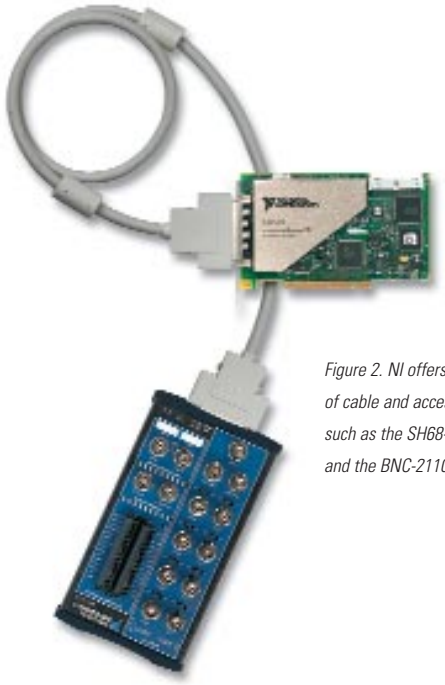


Figure 2. NI offers a wide variety of cable and accessory options, such as the SH68-68-EP cable and the BNC-2110 terminal block.

A variety of cabling and accessory options are available for your needs. Use the following tables to choose the most appropriate cables and accessories. To determine which Multifunction DAQ device best fits your needs, please see page 189.

Platform	Shielding	Connect to ...	Cable	Adapter	Accessory
PCI/PXI/USB/FireWire					
	Shielded	SCC portable signal conditioning per channel	SH68-68-EP	–	SC-2345 and modules, page 251
	Shielded	SCXI high-performance signal conditioning	SCXI-1349	–	SCXI Chassis and Modules, page 270
	Shielded	Screw terminals [1]	SH68-68-EP or SH68-68R1-EP	–	SCB-68
	Shielded	BNC terminal block	SH68-68-EP	–	BNC-2110, BNC-2120, BNC-2090
	Shielded	50-pin connector	SH6850	–	CB50, custom or 3rd party
	Shielded	Configurable connectivity box	SH68-68-EP	–	CA-1000, page 351
	Unshielded	Screw terminals [1]	R6868	–	TBX-68, CB-68LP, CB-68LPR, DAQ signal accessory
	Unshielded	50-pin connector	R6850	–	CB50, custom or 3rd party
PXI only					
	Shielded	Front-mounted screw terminals	N/A	–	TB-2705
PCMCIA					
	Shielded	Screw terminals [1]	SHC68-68-EP or SHC68U-68-EP [2]	–	SCB-68, CA-1000
	Shielded	50-pin connector	SHC68-68-EP or SHC68U-68-EP [2]	68M-50F MIO	CB50, custom or 3rd party
	Unshielded	Screw terminals [1]	RC68-68		TBX-68, CB-68LP, CB-68LPR, DAQ signal accessory
	Unshielded	50-pin connector	RC68-68	68M-50F MIO	CB50, custom or 3rd party

[1] Unshielded cables can connect to shielded accessories and vice-versa. [2] In adjacent PCMCIA slots, both cables types are required because the same cable would cause mechanical hindrance.

Table 1. Cable Connection Specifications for 16-Channel E Series Devices and Basic Multifunction DAQ (except NI 6025E, which is on the next page)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Multifunction DAQ Cable and Accessory Selection Guides

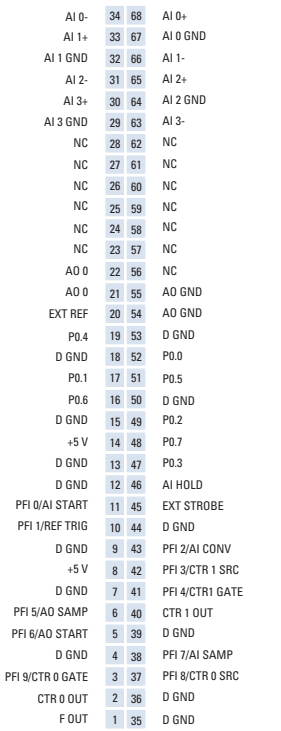


Figure 2. S Series Devices Connector

[1]No connects for boards that do not support AO or use an external reference with the SH1006868 cable.

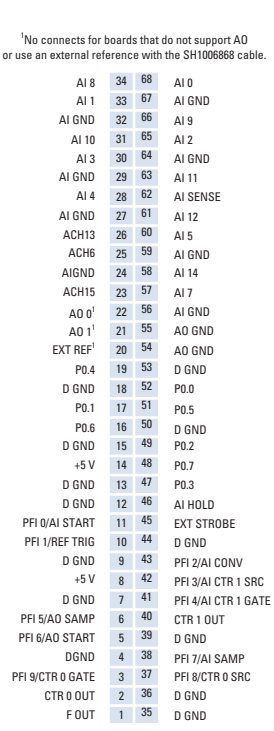


Figure 3. I/O Connector for 16-Channel E Series and Basic Multifunction DAQ Devices, except NI 6025E

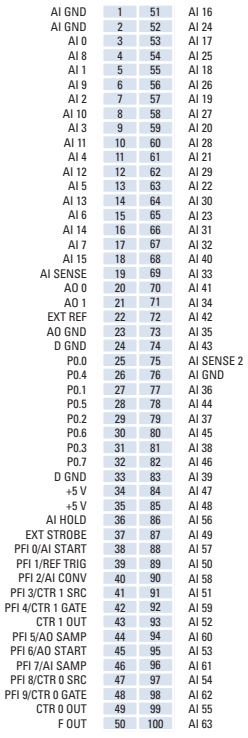


Figure 4. I/O Connector for 64-Channel E Series Devices

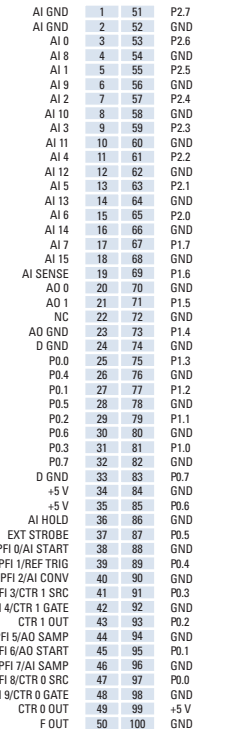


Figure 5. I/O Connector for the NI 6025E Device

E Series Devices (NI 6031E, NI 6033E, NI 6071E, NI 6025E)

Platform	Shielding	Connect to ...	Cable	Cable Leg	Adapter	Accessory
PCI, PXI						
	Shielded	Screw terminals	SH100100	–	–	SCB-100
	Shielded	Screw terminals	SH1006868	MIO:	–	SCB-68
	Shielded		SH1006868	Extended:	–	SCB-68
	Shielded	Screw terminals[1]	SH1006868	MIO:	–	TBX-68, CB-68LP, CB-68LPR, DAQ signal accessory
	Shielded	Screw terminals[1]	SH1006868	Extended:	–	TBX-68, CB-68LP, CB-68LPR
	Shielded	BNC terminal block	SH1006868	MIO:	–	BNC-2110, BNC-2120, BNC-2090
	Shielded		SH1006868	Extended:	–	BNC-2115
	Shielded	50-pin connectors	SH1006868	MIO:	68M-50F MIO	Custom or 3rd party
	Shielded		SH1006868	Extended:	68M-50F Extended	Custom or 3rd party
	Unshielded	50-pin connector	R1005050	MIO:	–	Custom or 3rd party
	Unshielded		R1005050	Extended:	–	Custom or 3rd party

[1]Shielded cable with unshielded accessories

Table 2. Cable Connection Specifications for 64-Channel E Series Devices and the NI 6025E

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP