ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments SCXI-1166* at our website: *Click HERE*

High-Current General-Purpose Relays

NI PXI-2566, NI SCXI-1166

- Independent SPDT relays
  - 16 channels in PXI
  - 32 channels in SCXI
- Nonlatching relays
- Switching capacity
  - 2 A switching, 5 A carry
  - 150 VDC/125 VAC
- 32,000-step scan list for deterministic scanning
- Fully software programmable
- 115 operations/s

Operating Systems
- Windows 2000/NT/XP

Recommended Software
- LabVIEW
- LabVIEW Real-Time Module
- LabWindows/CVI
- Measurement Studio
- NI Switch Executive

Other Compatible Software
- Visual Basic
- C/C++

Driver Software (included)
- NI-SWITCH

Compliance
- CE

NEW



Overview and Applications

The National Instruments PXI-2566 and SCXI-1166 are general purpose 16 and 32-channel switch modules, respectively. These switch modules have independent SPDT (Form C) nonlatching electromechanical relays with very low on-resistance and low thermal offsets. They can switch up to 2 A at 30 VAC/30 VDC and can carry 5 A per channel. Hence, these switch modules are ideal for switching and routing high-current signals. Each relay channel has a normally closed (NC), normally open (NO), and common (COM) terminal.

Extended Features and Specifications

National Instruments switch modules are built with a number of core features that are covered in detail in the Switch Overview section.

For additional information about the PXI-2566 and SCXI-1166, including software, certifications and compliance, relay control, etc., please see page 20. For detailed specifications, please see page 506.

Ordering Information

NI PXI-2566 778572-66
NI SCXI-1166 776572-66
Includes switch module and NI SWITCH driver software.

Accessories
SCXI-1366 terminal block 777687-66
TB-2666 PXI terminal block 778717-66
Connector and back-shell kit (safety-keyed) 778720-01
PCI-4021 switch controller 778277-01
PXI-4021 switch controller 778278-01

BUY ONLINE!
Visit ni.com/products and enter pxi2566 and/or scxi1166.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Switch Specifications

Specifications (continued)

Physical

Dimensions ..... 17.2 by 20.3 by 3.0 cm (6.8 by 8.0 by 1.2 in.)

Environment

Operating temperature ..... 0 to 50 °C
Storage temperature ..... -20 to 70 °C
Relative humidity ..... 5 to 90% noncondensing

[1]Transfer rate depends largely on the computer and software. These tests were made using an AT-MIO-16E-2 installed in a 450 MHz Pentium III computer running LabVIEW and Windows NT.

PXI-2566, SCXI-1166

Input Characteristics


Maximum switching voltage
- Channel-to-channel ..... 150 VDC, 125 VAC, CAT I
- Channel-to-ground ..... 150 VDC, 125 VAC, CAT I

Simultaneous channels at maximum switching current (≤25 °C)
- PXI-2566 16
- SCXI-1166 32

Maximum carry current ..... 5 ADC, 5 AAC (per channel)
Simultaneous channels at maximum carry current (≤25 °C)
- PXI-2566 9
- SCXI-1166 8

Maximum switching power ..... 60 W, 62.5 VA (DC to 60 Hz) (per channel)
DC path resistance
- Initial ..... <1.0 Ω
- End of life ..... ≥1.0 Ω

Thermal EMF ..... <9 µV (typical at 23 °C)
Minimum switching capacity ..... 10 µA at 10 mVDC
Bandwidth (-3 dB) ..... ≥70 MHz

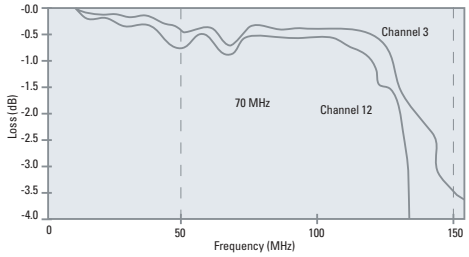

Crosstalk (Typical at 23 °C)

Channel-to-channel
- 10 kHz ..... ≤-75 dB
- 100 kHz ..... ≤-65 dB
- 1 MHz ..... ≤-45 dB
- 10 MHz ..... ≤-25 dB

Isolation (Typical at 23 °C)

Open channel
- 100 kHz ..... ≥65 dB
- 1 MHz ..... ≥45 dB
- 10 MHz ..... ≥25 dB

Dynamic Characteristics

Maximum speed ..... 115 operations/s
Relay operate time
- Typical ..... 2 ms
- Maximum ..... 4.4 ms

Expected relay life
- Mechanical ..... 10^8 operations
- Electrical
  - 30 VDC, 1 A resistive ..... $5x10^5$ operations
  - 30 VDC, 2 A resistive ..... 10^5 operations
  - 125 VAC, 0.2 A resistive ..... $3x10^5$ operations
  - 125 VAC, 0.5 A resistive ..... 10^5 operations

Physical Characteristics

Relay type ..... Electromechanical, nonlatching
Relay contact material ..... Gold clad silver alloy
I/O connectors ..... Two 62-pin D-Sub
Dimensions
- PXI-2566 ..... 10 by 16 cm (3.9 by 6.3 in.)
- SCXI-1166 ..... 3.0 by 17.3 by 19.6 cm (1.2 by 6.7 by 7.6 in.)

Environment

Operating temperature ..... 0 to 50 °C
Storage temperature ..... -20 to 70 °C
Relative humidity ..... 5 to 85% noncondensing
Pollution degree 2
Approved at altitudes up to 2,000 m

Safety

This product is designed to meet the requirements of the following standards of safety for electricalequipment for measurement, control and laboratory use:
- IEC 61010-1, EN 61010-1
- UL 3111-1, UL 61010B-1
- CAN/CSA C22.2 No. 1010.1

CE Compliance

This product meets the essential requirements of applicable European Directives, as amended for CE Marking, as follows:
- Low-Voltage Directive (safety) 73/23/EEC

Electromagnetic Compatibility
- Directive (EMC) 89/336/EEC

SCXI-1160, SCXI-1161

Input Characteristics

Number of relays
- SCXI-1160 16
- SCXI-1161 8

Relay type
- SCXI-1160 ..... SPDT (Form C), latching
- SCXI-1161 ..... SPDT (Form C), nonlatching

Maximum input voltage
- Channel-to-channel ..... 250 VDC, 250 V_{rms}
- Channel-to-ground ..... 250 VDC, 250 V_{rms}

Maximum switching voltage
- SCXI-1160 ..... 250 VDC, 250 V_{rms}
- SCXI-1161 ..... 250 VDC, 250 V_{rms}

Maximum switching capacity
- SCXI-1160 ..... 2 A at 250 V_{rms}, 0.6 A at 48 VDC, 2 A at 30 VDC
- SCXI-1161 ..... 8 A at 125 V_{rms}, 6 A at 250 V_{rms}, 5 A at 30 VDC

Minimum current load
- SCXI-1160 ..... 100 µA
- SCXI-1161 ..... 100 mA

Channel on resistance
- SCXI-1160 (includes terminal block) ..... 75 mΩ (initially)
- SCXI-1161 ..... 175 mΩ (initially)

Contact material
- SCXI-1160 ..... Gold-clad silver alloy
- SCXI-1161 ..... Silver alloy

Thermal offset
- SCXI-1160 ..... 3 µV

Dynamic Characteristics

Relay operate time
- SCXI-1160 ..... 10 ms
- SCXI-1161 ..... 15 ms

Relay release time
- SCXI-1160 ..... 10 ms
- SCXI-1161 ..... 15 ms

Maximum switching rate
- SCXI-1160 ..... 50 operations/s
- SCXI-1161 ..... 3 operations/s

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP