

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Corning® 62.5/125 Optical Fiber
Product Information



PI360
Issued: March 2002
Supersedes: December 2001
ISO 9001 Registered

Corning Multimode Optical Fiber

Corning® 62.5/125 optical fiber is part of Corning's line of standard multimode fibers. It is a graded-index 62.5/125 µm nominal multimode fiber with a 62.5 µm core diameter and a 125 µm cladding diameter. Corning 62.5/125 fiber offers full compatibility with legacy systems.

Versatility

Corning 62.5/125 fiber is suitable for installation in all premises applications including backbone, riser, and horizontal. Typical applications are local area and campus-wide networks carrying data, voice, and/or video services using light emitting diodes (LEDs), 850 nm vertical cavity surface emitting lasers (VCSELs), 780 nm CD lasers, and 1300 nm Fabry-Perot lasers. This product is specified by industry standards for fiber-optic network protocols, including Ethernet, Token Ring, fiber distributed data interface (FDDI), asynchronous transfer mode (ATM) and Fibre Channel.

Coating

Corning fiber is protected for long-term performance and reliability by the CPC® coating system. Corning's enhanced, dual acrylate CPC coatings provide excellent fiber protection and are easy to work with. CPC coatings are designed to be mechanically stripped and have a nominal outside diameter of 245 µm. CPC coatings are optimized for use in many single and multi-fiber cable designs including loose tube, ribbon, slotted core and tight buffer cables.

Quality, Consistency, Reliability

Corning 62.5/125 fiber offers consistent performance and proven reliability based on 150 years of glassmaking experience and 30 years of fiber manufacturing. Every meter of fiber is taken though Corning's rigorous Quality Architecture Program and is produced by state-of-the-art manufacturing. Corning 62.5/125 fiber is backed by Corning's Center for Fiber Testing, a world leading resource for qualifying new products, system testing and customer support.

Corning leads the industry in standards development through its cooperative efforts with standards organizations worldwide. These include Telecommunications Industry Association (TIA), the Institute of Electrical and Electronics Engineers, Inc. (IEEE), ATM Forum and Fibre Channel.

Technical Support

Every reel of Corning fiber is supported by hundreds of technical experts, ready to address any concerns related to optical fiber and its deployment. Corning's state-of-the-art tracking systems provide answers to specific questions on every reel of fiber produced and purchased.

Optical Specifications

Attenuation

≤ 3.0/0.7 dB/km @ 850/1300 nm

- No point discontinuity greater than 0.2 dB
- The attenuation at 1380 nm does not exceed the attenuation at 1300 nm by more than 1.0 dB/km
- The induced attenuation caused by wrapping the fiber 100 turns around a 75 mm mandrel shall not exceed 0.5 dB at 850 nm and 1300 nm

Special attenuation cells available upon request.

Bandwidth

Standard Bandwidth Cells
850/1300 nm (MHz•km)
160/500
200/500

Other bandwidth cells available upon request.

Chromatic Dispersion

- Zero Dispersion Wavelength (λ_0): 1332 nm ≤ λ_0 ≤ 1354 nm
- Zero Dispersion Slope (S_0): ≤ 0.097 ps/(nm²•km)

$$\text{Dispersion} = D(\lambda): \approx \frac{S_0}{4}\left[\lambda - \frac{\lambda_0^4}{\lambda^3}\right] \text{ps/(nm•km)}$$

For 750 nm ≤ λ ≤ 1450 nm, λ = Operating Wavelength

Core Diameter

- 62.5 ± 3.0 µm

Numerical Aperture

- 0.275 ± 0.015

Environmental Specifications

Environmental Test Condition	Induced Attenuation (dB/km)	
	850 nm	1300 nm
Temperature Dependence -60°C to +85°C	≤ 0.20	≤ 0.20
Temperature - Humidity Cycling -10°C to +85°C and 4% to 98% RH	≤ 0.20	≤ 0.20

Operating Temperature Range -60°C to +85°C

Dimensional Specifications

Standard Length (km/reel)

- 2.2 - 8.8
  Special lengths available upon request.

Glass Geometry

- Cladding Diameter: 125.0 ± 2.0 µm
- Core-Clad Concentricity: ≤ 3.0 µm
- Cladding Non-Circularity: < 2.0%
- Core Non-Circularity: ≤ 5%

  Non-Circularity is defined as:

$$\left[1 - \frac{\text{Min. Cladding Diameter}}{\text{Max. Cladding Diameter}}\right] \times 100$$

Coating Geometry

- Coating Diameter: 245 ± 5 µm
- Coating-Cladding Concentricity: < 12 µm

Mechanical Specifications

Proof Test

- The entire length of fiber is subjected to a tensile proof stress ≥ 100 kpsi (0.7 GN/m²)

Performance Characterizations

Characterized parameters are typical values.

Effective Group Index of Refraction (N_{eff})

- 1.496 at 850 nm
- 1.491 at 1300 nm


N_{eff} was empirically derived to the third decimal place using a specific commercially available OTDR.

Fatigue Resistance Parameter (n_d): 20


Coating Strip Force

- Dry: 0.6 lbs (2.7 N)
- Wet: 14 days in 23°C water soak: 0.6 lbs (2.7 N)

Refractive Index Profile (typical fiber)

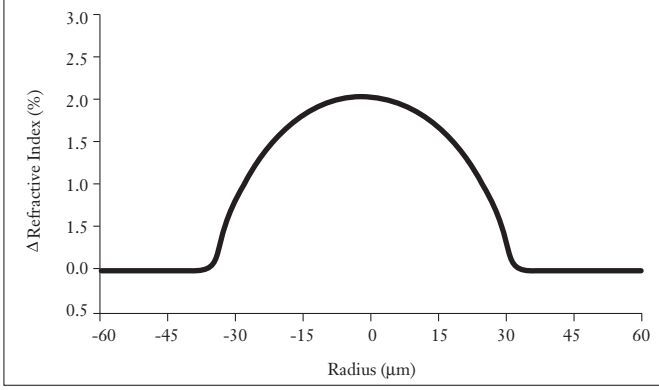

Spectral Attenuation (typical fiber)

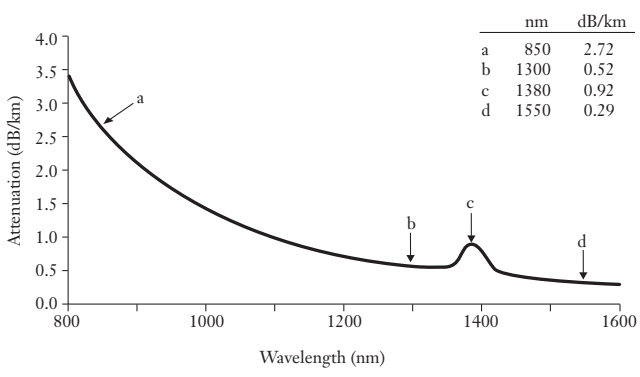

Ordering Information

To order Corning® 62.5/125 optical fiber, contact your sales representative, or call the Optical Fiber Customer Service Department at **607-248-2000** or **+44-1244-287-437** in Europe. Please specify the following parameters when ordering.

Fiber Type: 62.5/125 µm Multimode Fiber

Fiber Quantity: kms

Proof Test: 100 kpsi (0.7 GN/m²)

Other: (Requested ship date, desired attenuation cell, desired bandwidth cell, etc.)

Corning Incorporated
www.corning.com/opticalfiber

One Riverfront Plaza
Corning, NY 14831
U.S.A.

Phone: 800-525-2524 (U.S. and Canada)
607-786-8125 (International)

Fax: 800-539-3632 (U.S. and Canada)
607-786-8344 (International)

Email: cofic@corning.com

Europe

Phone: 00 800 6620 6621 (U.K.*, Ireland, Italy, France, Germany, The Netherlands, Spain and Sweden)

+1 607 786 8125 (All other countries)

Fax: +1 607 786 8344

Asia Pacific

Australia
Phone: 1-800-148-690
Fax: 1-800-148-568

Indonesia
Phone: 001-803-015-721-1261
Fax: 001-803-015-721-1262

Malaysia
Phone: 1-800-80-3156
Fax: 1-800-80-3155

Philippines
Phone: 1-800-1-116-0338
Fax: 1-800-1-116-0339

Singapore
Phone: 800-1300-955
Fax: 800-1300-956

Thailand
Phone: 001-800-1-3-721-1263
Fax: 001-800-1-3-721-1264

Latin America

Brazil
Phone: 000817-762-4732
Fax: 000817-762-4996

Mexico
Phone: 001-800-235-1719
Fax: 001-800-339-1472

Venezuela
Phone: 800-1-4418
Fax: 800-1-4419

Greater China

Beijing
Phone: (86) 10-6505-5066
Fax: (86) 10-6505-5077

Hong Kong
Phone: (852) 2807-2723
Fax: (852) 2807-2152

Shanghai
Phone: (86) 21-3222-4668
Fax: (86) 21-6288-1575

Taiwan
Phone: (886) 2-2716-0338
Fax: (886) 2-2716-0339

E-mail: GCCofic@corning.com

Corning is a registered trademark of Corning Incorporated, Corning, N.Y.

Any warranty of any nature relating to any Corning optical fiber is only contained in the written agreement between Corning Incorporated and the direct purchaser of such fiber.

©2001, Corning Incorporated

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP