ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *OKI M511000C-70J* at our website: *Click HERE*

OKI Semiconductor

This version: Jan. 1998
Previous version: May 1997

MSM511000C/CL

1,048,576-Word × 1-Bit DYNAMIC RAM : FAST PAGE MODE TYPE

DESCRIPTION

The MSM511000C/CL is a 1,048,576-word × 1-bit dynamic RAM fabricated in Oki's silicon-gate CMOS technology. The MSM511000C/CL achieves high integration, high-speed operation, and low-power consumption because Oki manufactures the device in a quadruple-layer polysilicon/single-layer metal CMOS process. The MSM511000C/CL is available in a 26/20-pin plastic SOJ or 20-pin plastic ZIP. The MSM511000CL (the low-power version) is specially designed for lower-power applications.


FEATURES

- 1,048,576-word × 1-bit configuration
- Single 5 V power supply, ±10% tolerance
- Input : TTL compatible, low input capacitance
- Output : TTL compatible, 3-state
- Refresh : 512 cycles/8 ms, 512 cycles/64 ms (L-version)
- Fast page mode, read modify write capability
- $\overline{CAS}$ before $\overline{RAS}$ refresh, hidden refresh, $\overline{RAS}$-only refresh capability
- Package options:
  26/20-pin 300 mil plastic SOJ (SOJ26/20-P-300-1.27) (Product : MSM511000C/CL-xxJS)
  20-pin 400 mil plastic ZIP (ZIP20-P-400-1.27) (Product : MSM511000C/CL-xxZS)
  xx indicates speed rank.


PRODUCT FAMILY

Family	Access Time (Max.)			Cycle Time (Min.)	Power Dissipation	
	t_{RAC}	t_{AA}	t_{CAC}		Operating (Max.)	Standby (Max.)
MSM511000C/CL-45	45 ns	24 ns	14 ns	90 ns	468 mW	5.5 mW/ 1.1 mW (L-version)
MSM511000C/CL-50	50 ns	26 ns	14 ns	100 ns	440 mW	
MSM511000C/CL-60	60 ns	30 ns	15 ns	120 ns	385 mW	
MSM511000C/CL-70	70 ns	35 ns	20 ns	130 ns	330 mW	

PIN CONFIGURATION (TOP VIEW)

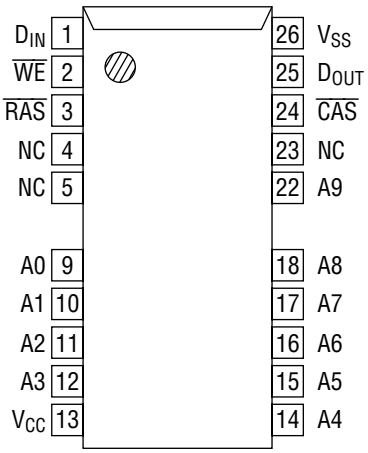


26/20-Pin Plastic SOJ

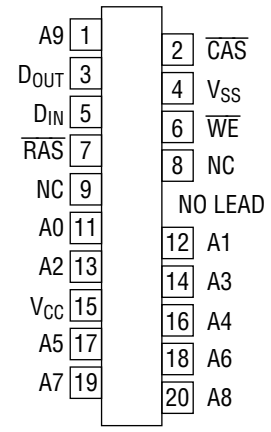

20-Pin Plastic ZIP

Pin Name	Function
A0 - A9	Address Input
$\overline{RAS}$	Row Address Strobe
$\overline{CAS}$	Column Address Strobe
D_{IN}	Data Input
D_{OUT}	Data Output
$\overline{WE}$	Write Enable
V_{CC}	Power Supply (5 V)
V_{SS}	Ground (0 V)
NC	No Connection

BLOCK DIAGRAM

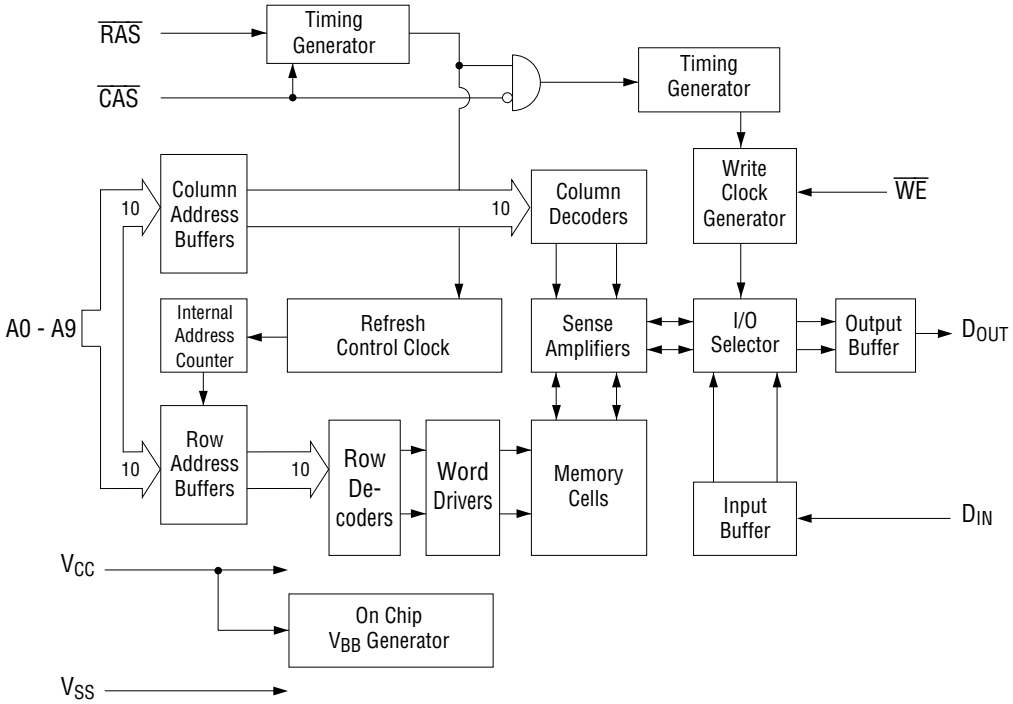

ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Voltage on Any Pin Relative to V_{SS}	V_T	–1.0 to 7.0	V
Short Circuit Output Current	I_{OS}	50	mA
Power Dissipation	P_D*	1	W
Operating Temperature	T_{opr}	0 to 70	°C
Storage Temperature	T_{stg}	–55 to 150	°C

*: Ta = 25°C

Recommended Operating Conditions

(Ta = 0°C to 70°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power Supply Voltage	V_{CC}	4.5	5.0	5.5	V
	V_{SS}	0	0	0	V
Input High Voltage	V_{IH}	2.4	—	6.5	V
Input Low Voltage	V_{IL}	–1.0	—	0.8	V

Capacitance

(V_{CC} = 5 V ±10%, Ta = 25°C, f = 1 MHz)

Parameter	Symbol	Typ.	Max.	Unit
Input Capacitance (A0 - A9, D_{IN})	C_{IN1}	—	5	pF
Input Capacitance ($\overline{RAS}$, $\overline{CAS}$, $\overline{WE}$)	C_{IN2}	—	5	pF
Output Capacitance (D_{OUT})	C_{OUT}	—	6	pF

DC Characteristics

(V_{CC} = 5 V ±10%, Ta = 0°C to 70°C)

Parameter	Symbol	Condition	MSM511000 C/CL-45		MSM511000 C/CL-50		MSM511000 C/CL-60		MSM511000 C/CL-70		Unit	Note
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		
Output High Voltage	V_{OH}	I_{OH} = –5.0 mA	2.4	V_{CC}	2.4	V_{CC}	2.4	V_{CC}	2.4	V_{CC}	V	
Output Low Voltage	V_{OL}	I_{OL} = 4.2 mA	0	0.4	0	0.4	0	0.4	0	0.4	V	
Input Leakage Current	I_{LI}	0 V ≤ V_I ≤ 6.5 V; All other pins not under test = 0 V	–10	10	–10	10	–10	10	–10	10	µA	
Output Leakage Current	I_{LO}	D_{OUT} disable 0 V ≤ V_O ≤ 5.5 V	–10	10	–10	10	–10	10	–10	10	µA	
Average Power Supply Current (Operating)	I_{CC1}	$\overline{RAS}$, $\overline{CAS}$ cycling, t_{RC} = Min.	—	85	—	80	—	70	—	60	mA	1, 2
Power Supply Current (Standby)	I_{CC2}	$\overline{RAS}$, $\overline{CAS}$ = V_{IH}	—	2	—	2	—	2	—	2	mA	1
		$\overline{RAS}$, $\overline{CAS}$	—	1	—	1	—	1	—	1		
		≥ V_{CC} –0.2 V	—	200	—	200	—	200	—	200	µA	1, 5
Average Power Supply Current ($\overline{RAS}$-only Refresh)	I_{CC3}	$\overline{RAS}$ cycling, $\overline{CAS}$ = V_{IH}, t_{RC} = Min.	—	85	—	80	—	70	—	60	mA	1, 2
Power Supply Current (Standby)	I_{CC5}	$\overline{RAS}$ = V_{IH}, $\overline{CAS}$ = V_{IL}, D_{OUT} = enable	—	5	—	5	—	5	—	5	mA	1
Average Power Supply Current ($\overline{CAS}$ before $\overline{RAS}$ Refresh)	I_{CC6}	$\overline{RAS}$ cycling, $\overline{CAS}$ before $\overline{RAS}$	—	85	—	80	—	70	—	60	mA	1, 2
Average Power Supply Current (Fast Page Mode)	I_{CC7}	$\overline{RAS}$ = V_{IL}, $\overline{CAS}$ cycling, t_{PC} = Min.	—	80	—	75	—	65	—	55	mA	1, 3
Average Power Supply Current (Battery Backup)	I_{CC10}	t_{RC} = 125 µs, $\overline{CAS}$ before $\overline{RAS}$, t_{RAS} ≤ 1 µs	—	300	—	300	—	300	—	300	µA	1, 4, 5

Notes : 1. I_{CC} Max. is specified as I_{CC} for output open condition.
2. The address can be changed once or less while $\overline{RAS}$ = V_{IL}.
3. The address can be changed once or less while $\overline{CAS}$ = V_{IH}.
4. V_{CC} – 0.2 V ≤ V_{IH} ≤ 6.5 V, –1.0 V ≤ V_{IL} ≤ 0.2 V.
5. L-version.

AC Characteristics (1/2)

(V_{CC} = 5 V ±10%, Ta = 0°C to 70°C) Note 1, 2, 3

Parameter	Symbol	MSM511000 C/CL-45		MSM511000 C/CL-50		MSM511000 C/CL-60		MSM511000 C/CL-70		Unit	Note
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		
Random Read or Write Cycle Time	t_{RC}	90	—	100	—	120	—	130	—	ns	
Read Modify Write Cycle Time	t_{RWC}	110	—	120	—	140	—	155	—	ns	
Fast Page Mode Cycle Time	t_{PC}	34	—	36	—	40	—	45	—	ns	
Fast Page Mode Read Modify Write Cycle Time	t_{PRWC}	54	—	56	—	60	—	70	—	ns	
Access Time from $\overline{RAS}$	t_{RAC}	—	45	—	50	—	60	—	70	ns	4, 5, 6
Access Time from $\overline{CAS}$	t_{CAC}	—	14	—	14	—	15	—	20	ns	4, 5
Access Time from Column Address	t_{AA}	—	24	—	26	—	30	—	35	ns	4, 6
Access Time from $\overline{CAS}$ Precharge	t_{CPA}	—	28	—	30	—	35	—	40	ns	4
Output Low Impedance Time from $\overline{CAS}$	t_{CLZ}	0	—	0	—	0	—	0	—	ns	4
$\overline{CAS}$ to Data Output Buffer Turn-off Delay Time	t_{OFF}	0	14	0	14	0	15	0	20	ns	7
Transition Time	t_T	3	50	3	50	3	50	3	50	ns	3
Refresh Period	t_{REF}	—	8	—	8	—	8	—	8	ms	
Refresh Period (L-version)	t_{REF}	—	64	—	64	—	64	—	64	ms	
$\overline{RAS}$ Precharge Time	t_{RP}	35	—	40	—	50	—	50	—	ns	
$\overline{RAS}$ Pulse Width	t_{RAS}	45	10,000	50	10,000	60	10,000	70	10,000	ns	
$\overline{RAS}$ Pulse Width (Fast Page Mode)	t_{RASP}	45	100,000	50	100,000	60	100,000	70	100,000	ns	
$\overline{RAS}$ Hold Time	t_{RSH}	14	—	14	—	15	—	20	—	ns	
$\overline{CAS}$ Precharge Time (Fast Page Mode)	t_{CP}	10	—	10	—	10	—	10	—	ns	
$\overline{CAS}$ Pulse Width	t_{CAS}	14	10,000	14	10,000	15	10,000	20	10,000	ns	
$\overline{CAS}$ Hold Time	t_{CSH}	45	—	50	—	60	—	70	—	ns	
$\overline{CAS}$ to $\overline{RAS}$ Precharge Time	t_{CRP}	5	—	5	—	5	—	5	—	ns	
$\overline{RAS}$ Hold Time from $\overline{CAS}$ Precharge	t_{RHCP}	28	—	30	—	35	—	40	—	ns	
$\overline{RAS}$ to $\overline{CAS}$ Delay Time	t_{RCD}	17	31	18	36	20	45	20	50	ns	5
$\overline{RAS}$ to Column Address Delay Time	t_{RAD}	12	21	13	24	15	30	15	35	ns	6
Row Address Set-up Time	t_{ASR}	0	—	0	—	0	—	0	—	ns	
Row Address Hold Time	t_{RAH}	7	—	8	—	10	—	10	—	ns	
Column Address Set-up Time	t_{ASC}	0	—	0	—	0	—	0	—	ns	
Column Address Hold Time	t_{CAH}	12	—	13	—	15	—	15	—	ns	
Column Address Hold Time from $\overline{RAS}$	t_{AR}	35	—	40	—	50	—	55	—	ns	
Column Address to $\overline{RAS}$ Lead Time	t_{RAL}	24	—	26	—	30	—	35	—	ns	

AC Characteristics (2/2)

(V_{CC} = 5 V ±10%, Ta = 0°C to 70°C) Note 1, 2, 3

Parameter	Symbol	MSM511000 C/CL-45		MSM511000 C/CL-50		MSM511000 C/CL-60		MSM511000 C/CL-70		Unit	Note
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		
Read Command Set-up Time	t_{RCS}	0	—	0	—	0	—	0	—	ns	
Read Command Hold Time	t_{RCH}	0	—	0	—	0	—	0	—	ns	8
Read Command Hold Time referenced to $\overline{RAS}$	t_{RRH}	0	—	0	—	0	—	0	—	ns	8
Write Command Set-up Time	t_{WCS}	0	—	0	—	0	—	0	—	ns	9
Write Command Hold Time	t_{WCH}	10	—	10	—	10	—	15	—	ns	
Write Command Hold Time from $\overline{RAS}$	t_{WCR}	35	—	40	—	50	—	55	—	ns	
Write Command Pulse Width	t_{WP}	10	—	10	—	10	—	15	—	ns	
Write Command to $\overline{RAS}$ Lead Time	t_{RWL}	14	—	14	—	15	—	20	—	ns	
Write Command to $\overline{CAS}$ Lead Time	t_{CWL}	14	—	14	—	15	—	20	—	ns	
Data-in Set-up Time	t_{DS}	0	—	0	—	0	—	0	—	ns	10
Data-in Hold Time	t_{DH}	12	—	13	—	15	—	15	—	ns	10
Data-in Hold Time from $\overline{RAS}$	t_{DHR}	35	—	40	—	50	—	55	—	ns	
$\overline{CAS}$ to $\overline{WE}$ Delay Time	t_{CWD}	14	—	14	—	15	—	20	—	ns	9
Column Address to $\overline{WE}$ Delay Time	t_{AWD}	24	—	26	—	30	—	35	—	ns	9
$\overline{RAS}$ to $\overline{WE}$ Delay Time	t_{RWD}	45	—	50	—	60	—	70	—	ns	9
$\overline{CAS}$ Precharge $\overline{WE}$ Delay Time	t_{CPWD}	33	—	35	—	40	—	45	—	ns	9
$\overline{CAS}$ Active Delay Time from $\overline{RAS}$ Precharge	t_{RPC}	0	—	0	—	0	—	0	—	ns	
$\overline{RAS}$ to $\overline{CAS}$ Set-up Time ($\overline{CAS}$ before $\overline{RAS}$)	t_{CSR}	10	—	10	—	10	—	10	—	ns	
$\overline{RAS}$ to $\overline{CAS}$ Hold Time ($\overline{CAS}$ before $\overline{RAS}$)	t_{CHR}	25	—	25	—	30	—	30	—	ns	

Notes:

1. A start-up delay of 100 μs is required after power-up, followed by a minimum of eight initialization cycles ($\overline{RAS}$-only refresh or $\overline{CAS}$ before $\overline{RAS}$ refresh) before proper device operation is achieved.

2. The AC characteristics assume t_T = 5 ns.

3. V_{IH} (Min.) and V_{IL} (Max.) are reference levels for measuring input timing signals. Transition times (t_T) are measured between V_{IH} and V_{IL}.

4. This parameter is measured with a load circuit equivalent to 2 TTL loads and 100 pF.

5. Operation within the t_{RCD} (Max.) limit ensures that t_{RAC} (Max.) can be met. t_{RCD} (Max.) is specified as a reference point only. If t_{RCD} is greater than the specified t_{RCD} (Max.) limit, then the access time is controlled by t_{CAC}.

6. Operation within the t_{RAD} (Max.) limit ensures that t_{RAC} (Max.) can be met. t_{RAD} (Max.) is specified as a reference point only. If t_{RAD} is greater than the specified t_{RAD} (Max.) limit, then the access time is controlled by t_{AA}.

7. t_{OFF} (Max.) defines the time at which the output achieves the open circuit condition and is not referenced to output voltage levels.


8. t_{RCH} or t_{RRH} must be satisfied for a read cycle.

9. t_{WCS}, t_{CWD}, t_{RWD}, t_{AWD} and t_{CPWD} are not restrictive operating parameters. They are included in the data sheet as electrical characteristics only. If $t_{WCS} \geq t_{WCS}$ (Min.), then the cycle is an early write cycle and the data out will remain open circuit (high impedance) throughout the entire cycle. If $t_{CWD} \geq t_{CWD}$ (Min.) , $t_{RWD} \geq t_{RWD}$ (Min.), $t_{AWD} \geq t_{AWD}$ (Min.) and $t_{CPWD} \geq t_{CPWD}$ (Min.), then the cycle is a read modify write cycle and data out will contain data read from the selected cell; if neither of the above sets of conditions is satisfied, then the condition of the data out (at access time) is indeterminate.


10. These parameters are referenced to the $\overline{CAS}$ leading edge in an early write cycle, and to the $\overline{WE}$ leading edge in a read modify write cycle.

TIMING WAVEFORM


Read Cycle

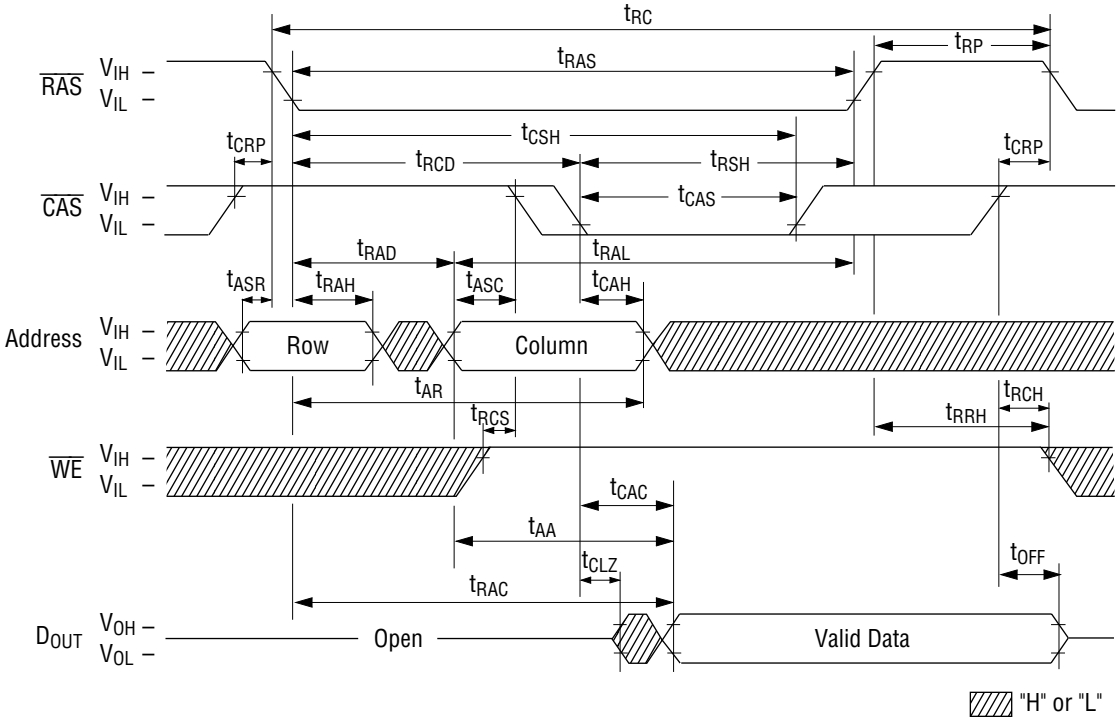


Write Cycle (Early Write)

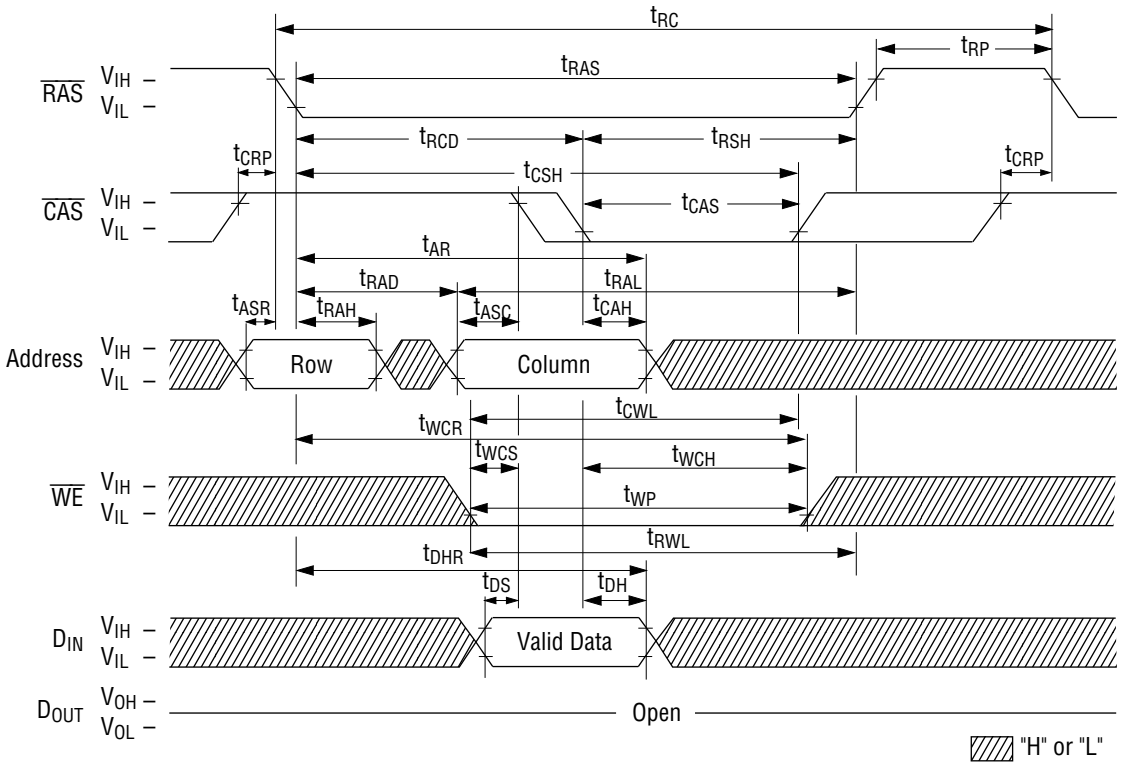


Read Modify Write Cycle

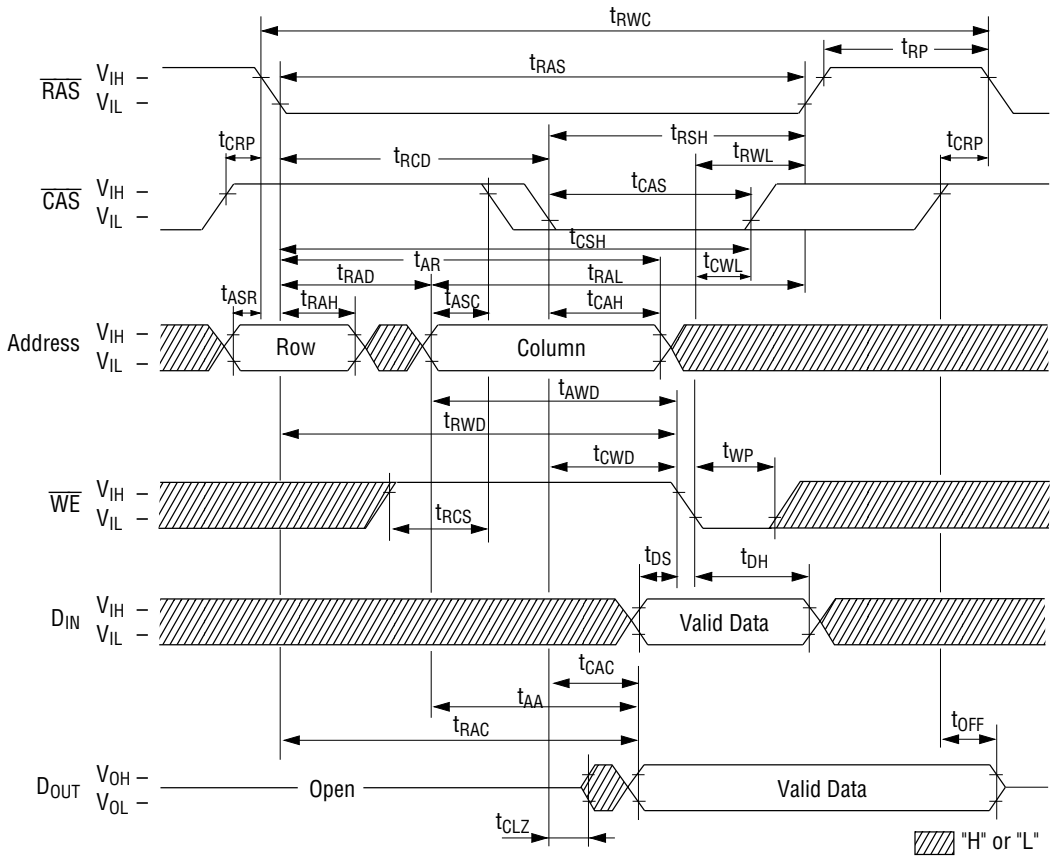


Fast Page Mode Read Cycle

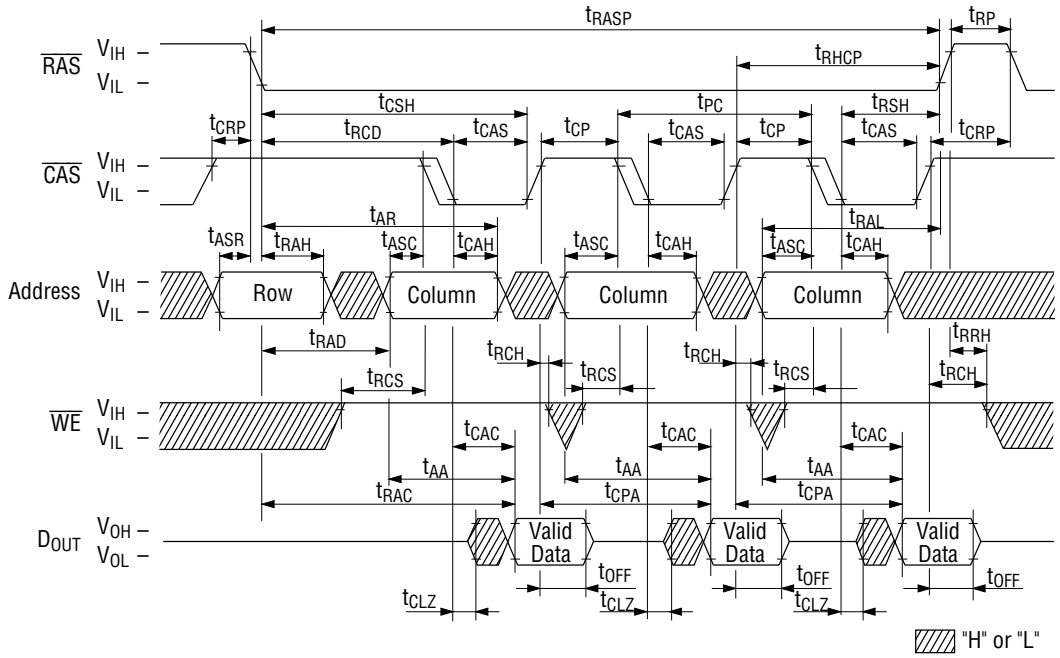


Fast Page Mode Write Cycle (Early Write)

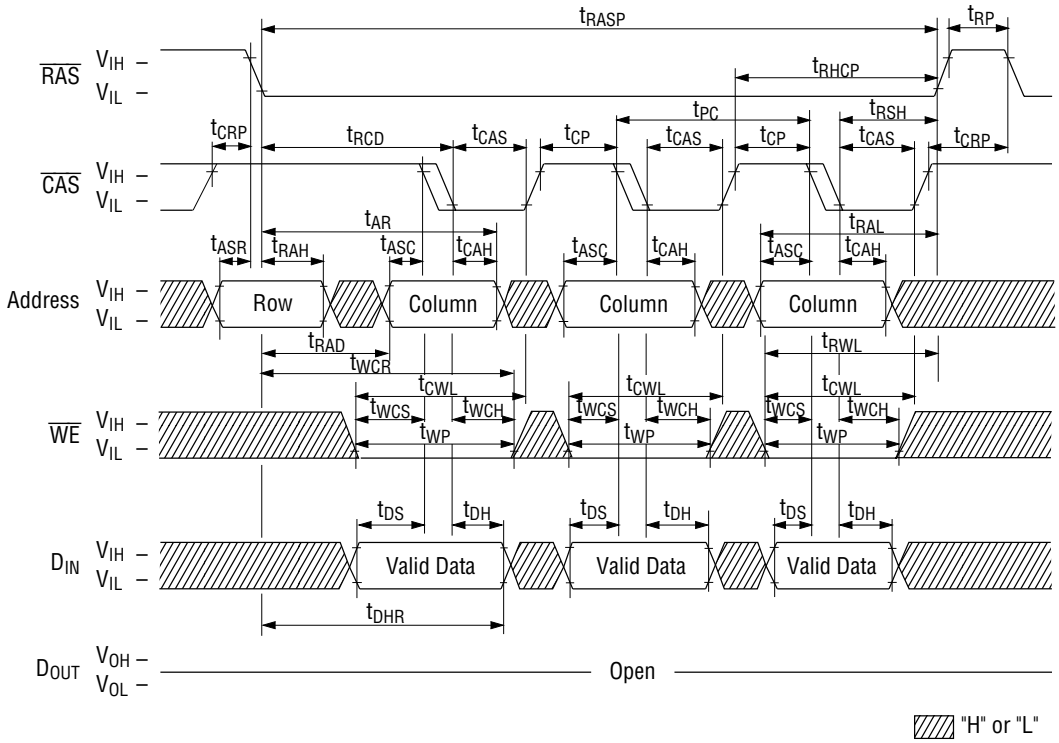

Fast Page Mode Read Modify Write Cycle

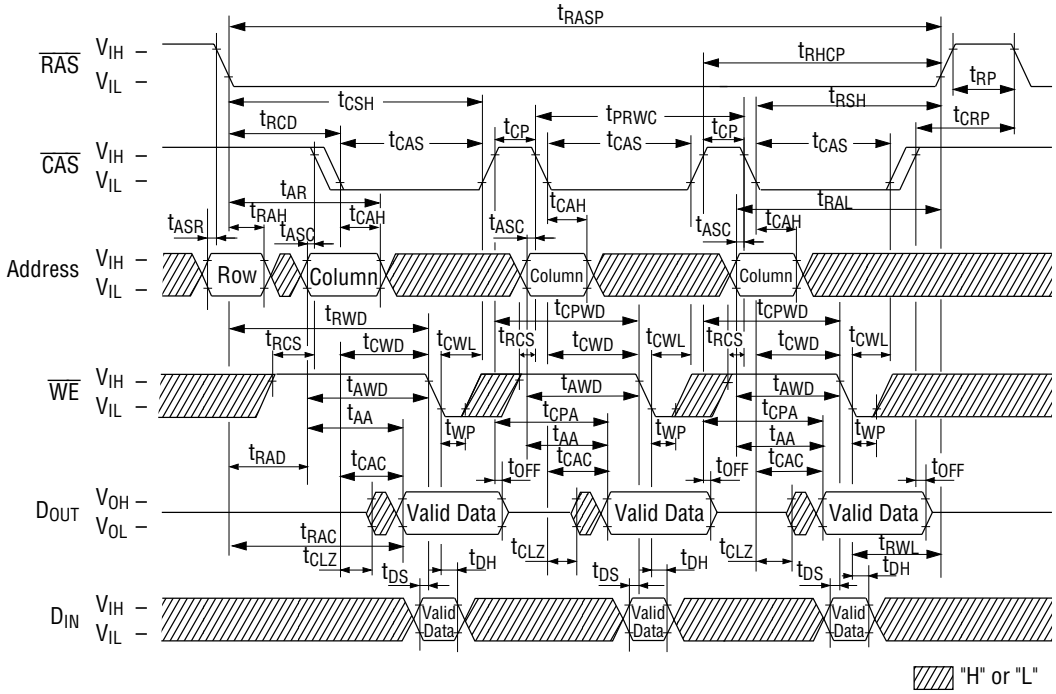


$\overline{RAS}$-Only Refresh Cycle

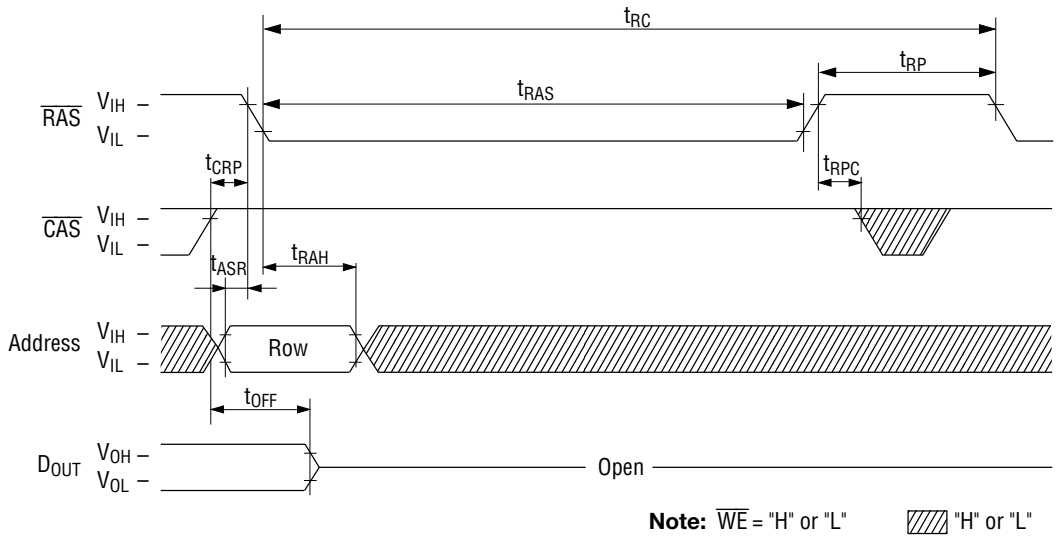


Note: $\overline{WE}$ = "H" or "L" "H" or "L"

$\overline{CAS}$ before $\overline{RAS}$ Refresh Cycle

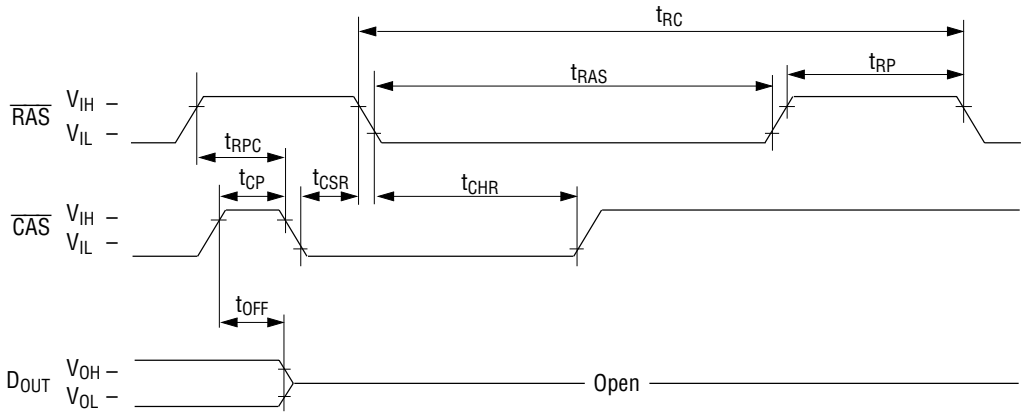


Note: $\overline{WE}$, Address = "H" or "L"

Hidden Refresh Read Cycle

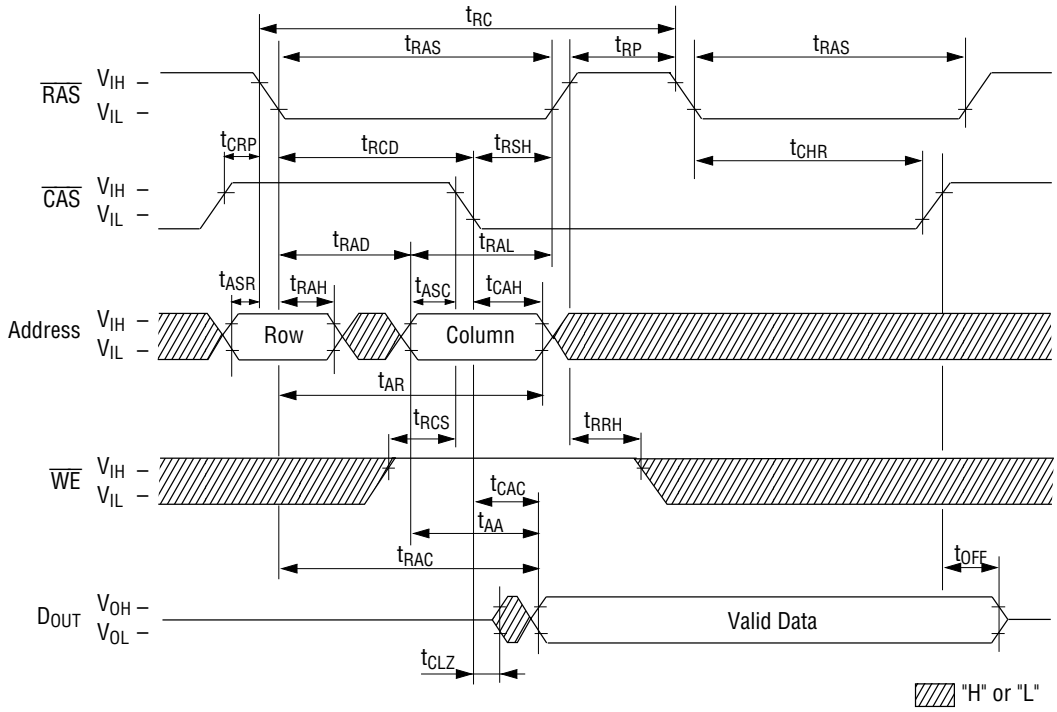


Hidden Refresh Write Cycle

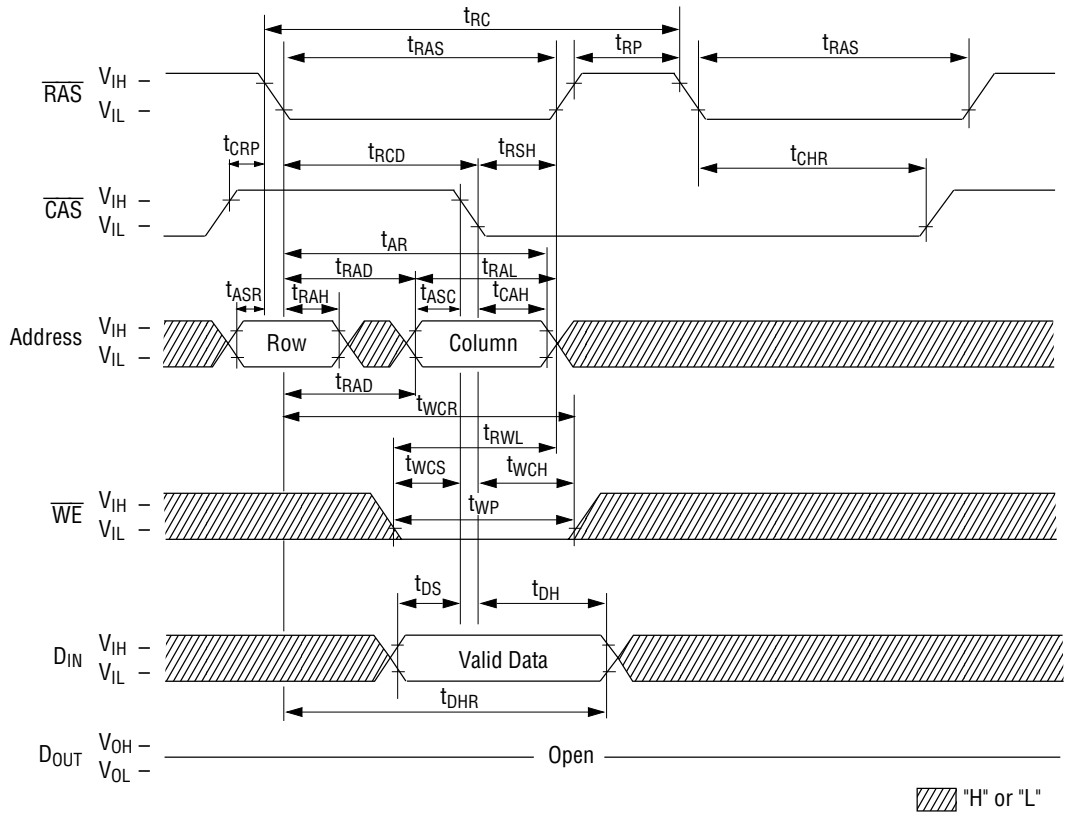

PACKAGE DIMENSIONS

(Unit : mm)

SOJ26/20-P-300-1.27

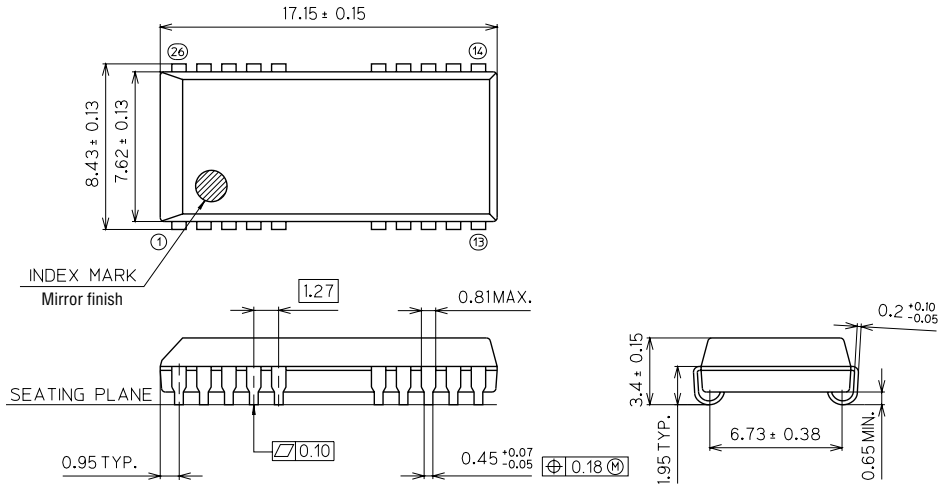


Package material	Epoxy resin
Lead frame material	42 alloy
Pin treatment	Solder plating
Solder plate thickness	5 μm or more
Package weight (g)	0.80 TYP.

Notes for Mounting the Surface Mount Type Package

The SOP, QFP, TSOP, SOJ, QFJ (PLCC), SHP and BGA are surface mount type packages, which are very susceptible to heat in reflow mounting and humidity absorbed in storage.
Therefore, before you perform reflow mounting, contact Oki's responsible sales person for the product name, package name, pin number, package code and desired mounting conditions (reflow method, temperature and times).

(Unit : mm)

ZIP20-P-400-1.27

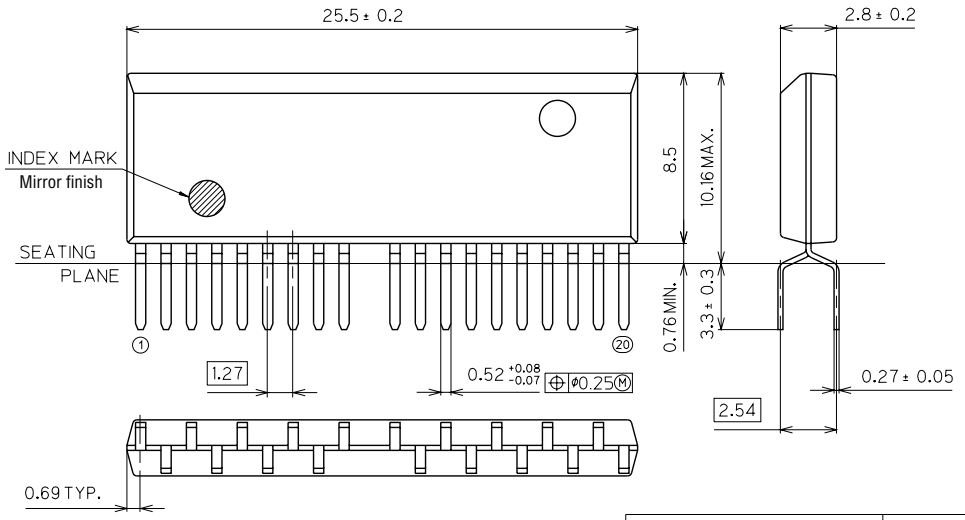

Package material	Epoxy resin
Lead frame material	42 alloy
Pin treatment	Solder plating
Solder plate thickness	5 μm or more
Package weight (g)	1.50 TYP.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP