ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *OMEGA SSRL240DC10* at our website: *Click HERE*

Solid State Relays

High Reliability, Vdc Input/ Vac Output, Vac Input/Vac Output


SSRL Series





SSRL240AC10
shown actual size.

- **Current Ratings to 100 A**
- **Multi-Million Cycle Life**
- **Compatible with Temperature Controllers**
- **Solid-State, SCR Design**
- **Zero Voltage Switching**
- **Control AC Lines to 660 Vac**
- **AC and DC Control Signal Models**
- **LED Input Status Indicator**

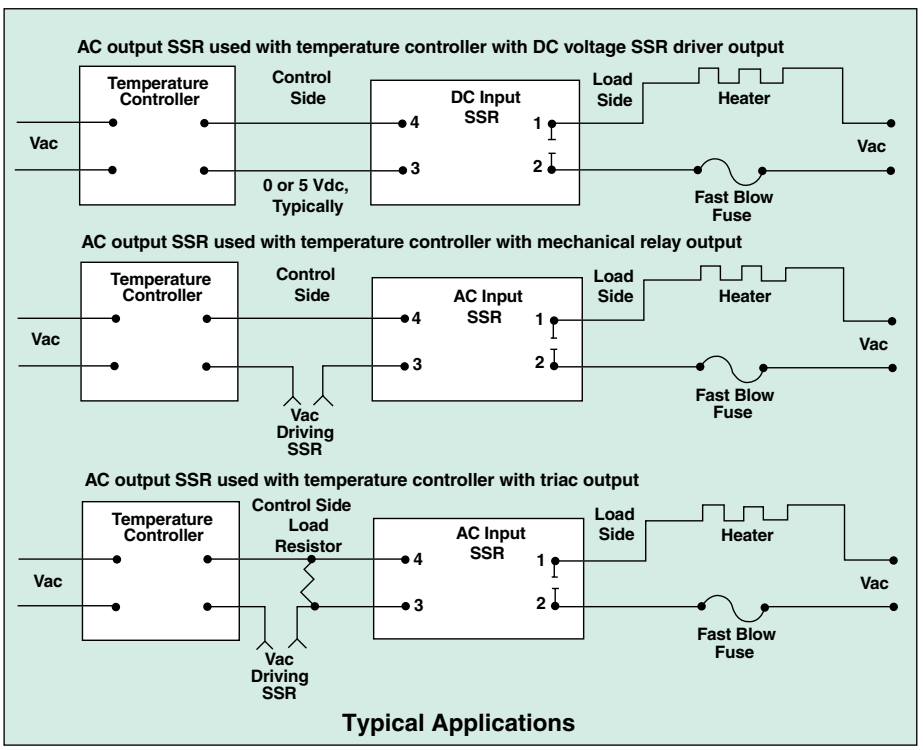

Typical Applications

The SSRL Series solid state relays are used to control large resistance heaters in conjunction with temperature controllers. Solid state relays are SPST, normally open switching devices with no moving parts, capable of millions of cycles of operation. By applying a control signal, an SSR switches “on” the AC load current, just as the moving contacts do on a mechanical contactor. Three-phase loads can be controlled using 2 or 3 SSR’s. Use 3 SSR’s for “Y” or “star” 3-phase loads using a neutral line. Two SSR’s will control “delta” loads with no neutral line. Three solid state relays are also used when there is no neutral load to provide redundancy and extra assurance of control.

“Switching” takes place at the 0 voltage crossover point of the alternating current cycle. Because of this, no appreciable electrical noise is generated, making SSR’s ideal for environments where there are apparatuses susceptible to RFI.

Common Specifications

Operating Temperature: -20 to 80°C (-5 to 175°F)

Storage Temperature: -40 to 80°C (-40 to 175°F)

Isolation: 4000 Vrms, input to output; 2500 Vrms input/output to ground

Capacitance: 8 pF, input to output (max)

Line Frequency Range: 47 to 63 Hz

Turn-On Time: 20 ms, AC; 05 cycle, DC

Turn-Off Time: 30 ms, AC; 05 cycle, DC

Output Specifications for Vac and Vdc Input Models

Specifications	10 Amp	25 Amp	50 Amp	75 Amp	100 Amp
Max On-State Current	10 A	25 A	50 A	75 A	100 A
Min On-State Current	100 mA				
Max 1-Cycle Surge	150 A	300 A	750 A	1000 A	1200 A
Max 1 sec Surge	30 A	75 A	150 A	225 A	300 A
I^2T (60 Hz), A^2sec	416	937	2458	5000	6000

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

These SSR's are of the twin SCR type, inherently more reliable and capable of higher overloads before failure than triacs. Heat is developed in a solid state relay due to the nominal voltage drop across the switching device. To dissipate the heat, an SSR must be mounted on a finned heat sink or aluminum plate. An SSR should be located where the ambient temperature is relatively low, since the current switching rating is lowered as the temperature increases. Another SSR characteristic is a small leakage current across the output when the relay is open. Because of this, a voltage will always exist on the load side of the device

In comparing SSR's with mechanical contactors, the SSR has a cycle life many times that of a comparably priced contactor. However, SSR's are more prone to failure due to overload and improper initial wiring. Solid state relays can fail, contact closed, on overload circuits. It is essential that a properly rated, fast blowing I^2T fuse be installed to protect the load circuit


Finned heat sinks are anodized fabrications that come complete with tapped mounting holes and screws. See thermal rating curves and ordering instructions for proper selection.




SSRL240DC50 solid state relay shown smaller than actual size with FHS-2 heat sink. See P-114 for more information.

FHS Heat Sink Dimensions and Specifications

FHS-1 and FHS-2 Heat Sink — **Dimensions: mm (inch)**

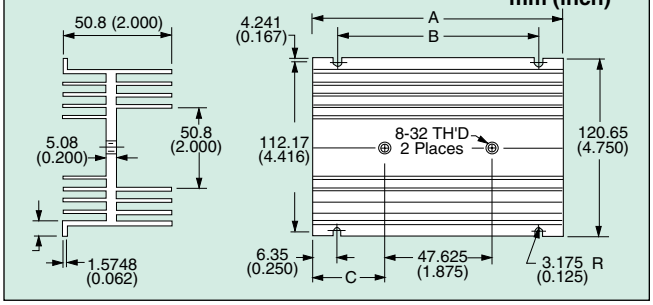

FHS-6 Heat Sink — **Dimensions: mm (in)**

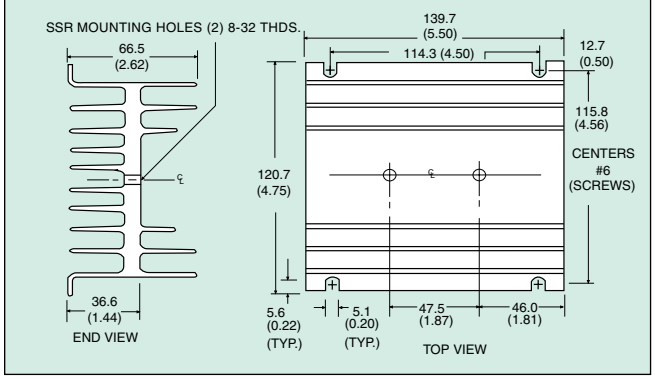


Model No.	A	B	C	Thermal Rating
FHS-1	3.00"	2.50"	0.56"	2°C/W
FHS-2	5.50"	5.00"	1.81"	1.2°C/W


SSR240 Series Electrical Specifications


Model No.	Type	Input-Control Signal				Output
		Control Signal Voltage	Control Signal Turn-On	Control Signal Turn-Off	Max Input Current	Peak Voltage* (60 s Max)
SSRL240AC10 SSRL240AC25 SSRL240AC50 SSRL240AC75 SSRL240AC100	AC control signal	90 to 280 Vac	90 Vac	10 Vac	10 mA	800V
SSRL240DC10 SSRL240DC25 SSRL240DC50 SSRL240DC75 SSRL240DC100	DC control signal	3 to 32 Vdc	3 Vdc	1 Vdc	14 mA	800V
SSRL660AC50 SSRL660AC75 SSRL660AC100	AC control signal	90 to 280 Vac	90 Vac	10 Vac	10 mA	1200V
SSRL660DC50 SSRL660DC75 SSRL660DC100	DC control signal	4 to 32 Vdc	4 Vdc	1 Vdc	14 mA	1200V


** Transients above table value should be suppressed.*


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

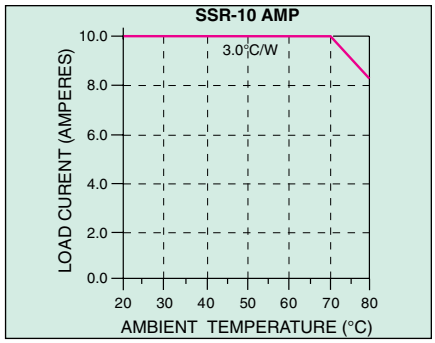


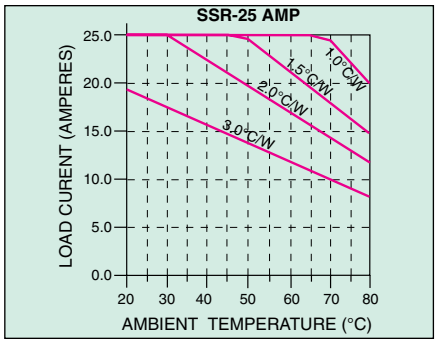


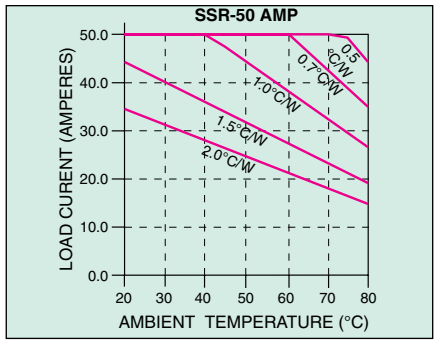

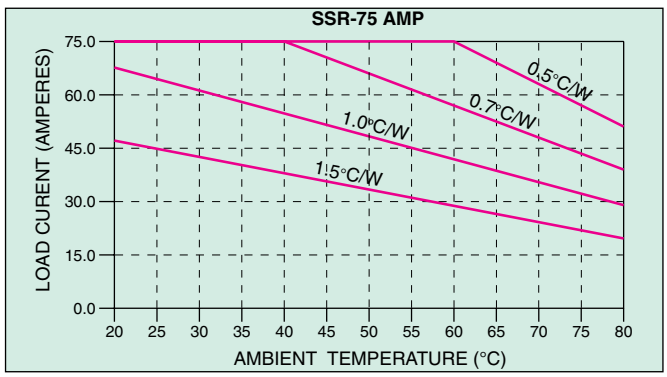

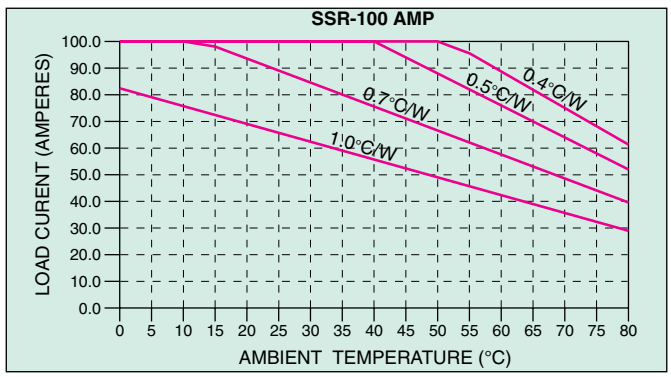

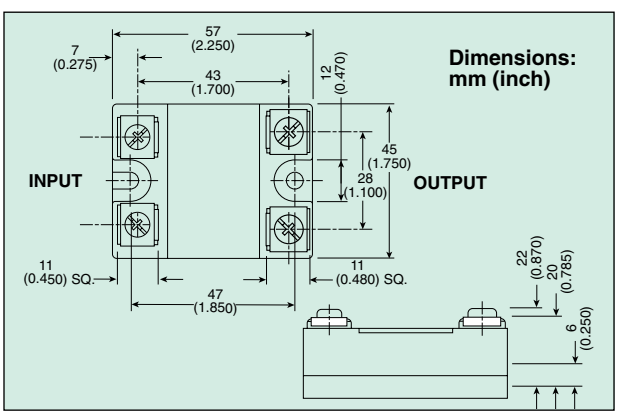


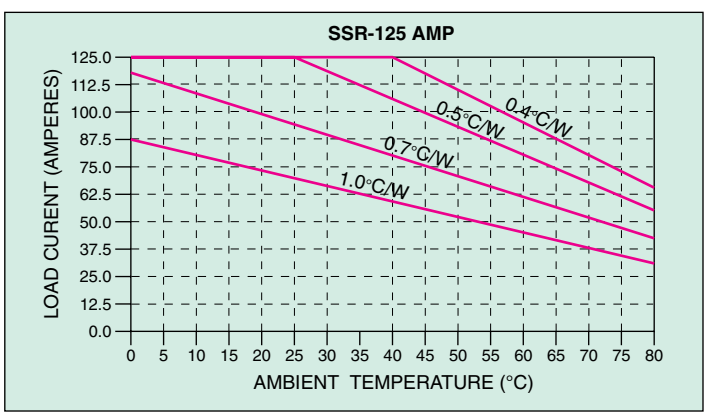

SSR240 Series Output-Vac Load Specifications

Model Number	Nominal AC Line Voltage	Nominal Load Current	Maximum Contact Voltage Drop	Maximum Off-State Leakage (25°C Maximum Ambient)		
				120 Vac	240 Vac	440 Vac
SSRL240AC10 **SSRL240AC25** **SSRL240AC50** **SSRL240AC75** **SSRL240AC100**	24 to 280 Vac	10 A 25 A 50 A 75 A 100 A	1.6V	0.1 mA	0.1 mA	N/A
SSRL240DC10 **SSRL240DC25** **SSRL240DC50** **SSRL240DC75** **SSRL240DC100**	24 to 280 Vac	10 A 25 A 50 A 75 A 100 A	1.6V	0.1 mA	0.1 mA	N/A
SSRL660AC50 **SSRL660AC75** **SSRL660AC100**	48 to 660 Vac	50 A 75 A 100A	1.6V	0.25 mA	0.25 mA	0.25 mA
SSRL660DC50 **SSRL660DC75** **SSRL660DC100**	48 to 660 Vac	50 A 75 A 100 A	1.6V	0.25 mA	0.25 mA	0.25 mA

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

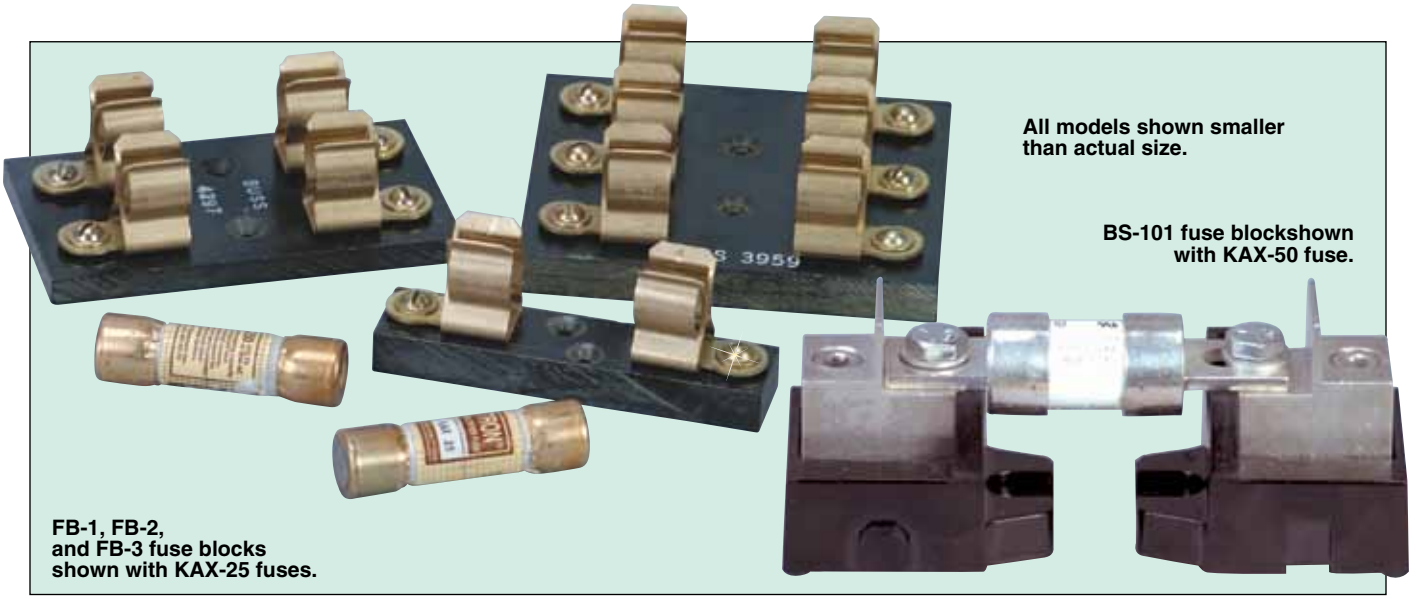

Fuses

To Order		
Model No.	**Capacity**	**Dimensions (Dia. x L)**
KAX-10	10 A	14 x 51 mm (0.6 x 2")
KAX-25	25 A	14 x 51 mm (0.6 x 2")
KAX-30	30 A	14 x 51 mm (0.6 x 2")
KAX-50	50 A	21 x 81 mm (0.8 x 3.2")
KAX-70	70 A	31 x 92 mm (1.2 x 3.6")
KBH-50	50 A	18 x 81 mm (0.7 x 3.2")
KBH-70	70 A	19 x 92 mm (0.7 x 3.6")

Fuse Blocks

To Order		
Model No.	**No. of Fuses**	**Compatible Fuses**
FB-1	1	KAX-10, KAX-25, KAX-30
FB-2	2	KAX-10, KAX-25, KAX-30
FB-3	3	KAX-10, KAX-25, KAX-30
BS-101	1	KAX-50, KAX-70, KAX-100, KBH (all models)

Shunt Resistors for Controllers with AC SSR (Triac) Output

To Order	
Model No.*	**Value**
SSRR20-12	2000 Ω, 12 watts
SSRR20-50	2000 Ω, 50 watts
SSRR15-12	1500 Ω, 12 watts
SSRR15-50	1500 Ω, 50 watts

***** *12 W versions for 120 V circuits; 50 W for 240 V.*

How to Order:

1) Select solid state relay based on type of control signal (AC or DC) and current switching requirements for resistive load.
2) Select fast blow (I^2T) fuse and fuse block. It is essential that a fuse be installed to protect the load circuit.
3) Select required finned heat sink based on max ambient temperature and thermal rating curve on previous page.

To Order		
Model No.	**Description**	**Nominal Rating**
SSRL240AC10	AC control signal (280 Vac line)	10 A
SSRL240AC25		25 A
SSRL240AC50		50 A
SSRL240AC75		75 A
SSRL240AC100		100 A
SSRL240DC10	DC control signal (280 Vac line)	10 A
SSRL240DC25		25 A
SSRL240DC50		50 A
SSRL240DC75		75 A
SSRL240DC100		100 A
SSRL660AC50	AC control signal (660 Vac line)	50 A
SSRL660AC75		75 A
SSRL660AC100		100 A
SSRL660DC50	DC control signal (660 Vac line)	50 A
SSRL660DC75		75 A
SSRL660DC100		100 A
FHS-1	Finned heat sink	2°C/W
FHS-2		1.2°C/W
FHS-6		0.7°C/W

Accessory

Model No.	Description
SSRL-DINRAIL-ADAPT	DIN rail adaptor for 10 A models only

Comes complete with operator's manual.

Note: *Reference SSR330 Series for additional heat sinks.*

Ordering Examples: SSRL240DC25*, solid state relay,* ***FHS-2,*** *finned heat sink,* ***KAX-25,*** *fuse, and* ***FB-1,*** *fuse block.*

SSRL240AC10, *solid state relay,* ***FHS-1,*** *finned heat sink,* ***KAX-10,*** *fuse, and* ***FB-1,*** *fuse block.*

P

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP