

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

- Analog ±10V torque (current) input command
- H-bridge single-phase output with current feedback
- 15 to 40VDC bus
- 3A each axis continuous, 5A peak, 30 kHz PWM




Options:

- If ordered with the 300 part number prefix, this accessory comes with no front, top, or bottom panels. This configuration is appropriate for a pure stack configuration, not mounted in any 3U rack.
- If ordered with the 3A0 part number prefix, this accessory comes with a front panel attached to the board, but no top or bottom panels. This configuration is appropriate for mounting in an open 3U rack.
- If ordered with the 3R0 part number prefix, this accessory comes with a front panel attached to the board, and top and bottom panels attached (or that can be attached) to one of the Option P 3U-pack frames. This configuration is appropriate for mounting in the enclosed 3U pack frame supplied by Delta Tau.

– AMP-3, four axes analog PWM amplifier, 70 VDC 8/12 A

Part Number: 3x0-603486-10x
Number of slots: 3
Resources: 4 analog channels
Power Requirements:

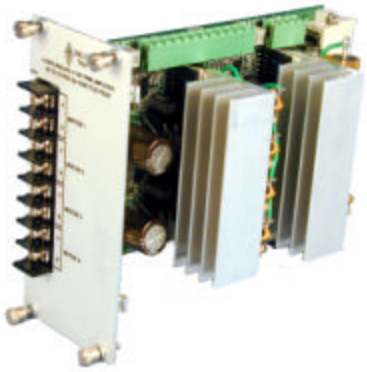

This accessory is a 3U-format amplifier for brushed motors or direct micro-stepping applications. It could be installed a UMAC system using its own optional backplane assembly. It provides four axes of amplifier circuits, each with these characteristics:

- Analog ±10V torque (current) input command
- H-bridge single-phase output with current feedback
- 15 to 65VDC bus
- 8A each axis continuous, 12A peak, 30 kHz PWM

Options:

- If ordered with the 300 part number prefix, this accessory comes with no front, top, or bottom panels. This configuration is appropriate for a pure stack configuration, not mounted in any 3U rack.
- If ordered with the 3A0 part number prefix, this accessory comes with a front panel attached to the board, but no top or bottom panels. This configuration is appropriate for mounting in an open 3U rack.
- If ordered with the 3R0 part number prefix, this accessory comes with a front panel attached to the board, and top and bottom panels attached (or that can be attached) to one of the Option P 3U-pack frames. This configuration is appropriate for mounting in the enclosed 3U pack frame supplied by Delta Tau.





21314 Lassen Street Chatsworth, CA 91311 // Tel. (818) 998-2095 Fax. (818) 998-7807 // www.deltatau.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP